

# Marine Product Catalogue



**IM 03**

# Our extensive product range at a glance!



## CRUISE Marine Refrigerators

**Elegance**

CRUISE 42\*\*

CRUISE 49\*\*

CRUISE 65\*\*

CRUISE 85\*\*

CRUISE 130\*\*

## High-efficiency Refrigerators

**Freeline**

ELEGANCE 115

**Classic**

CRUISE 36

CRUISE 40 Cubic

CRUISE 86

CRUISE 90

CRUISE 100

CRUISE 130 Drink

**Silver**

CRUISE 225

CRUISE 280

**White**

CRUISE 205

CRUISE 223

CRUISE 285

**Inox**

CRUISE 36

CRUISE 36 Full Inox

CRUISE 130 Drink\*\*

CRUISE 160 Drink

CRUISE 200\*\*

**Combi**

CRUISE 195\*\*  
Inox

CRUISE 220  
Inox

CRUISE 260  
Inox

CRUISE 320  
Inox

**Clean Touch**

CRUISE 42 Inox

CRUISE 49 Inox

CRUISE 65 Inox

CRUISE 85 Inox

CRUISE 130 Inox

CRUISE 130 Inox  
Speciale

## CRUISE Marine Freezers

**Classic**

CRUISE 63 F

CRUISE 65 F

CRUISE 90 F

**Inox**

CRUISE 63 F

CRUISE 65 F

**Clean Touch**

CRUISE 90 F

## DRAWER Marine Refrigerators & Freezers

**Mini**

DRAWER 16  
Silver

DRAWER 30  
Black

DRAWER 30  
Silver

DRAWER 30  
White

**Clean Touch**

DRAWER 42 Inox

DRAWER 49\*  
Inox

DRAWER 65\*  
Inox

DRAWER 70\*  
Inox

DRAWER 100\*  
Inox

**Inox**

DRAWER 55\*  
Frost-free

DRAWER 65\*  
Frost-free

DRAWER 65  
Frost-free Drink

DRAWER 85

DRAWER 105\*

DRAWER 130

DRAWER 160  
Light\*

DRAWER 190\*

Inox = stainless steel - \* Custom Panel version available - \*\* Available also with classic doors

## Cooling Boxes

Travel Boxes



TB 13

TB 18

Built-In Boxes



BI 16

BI 29 Dual

BI 30

BI 36

BI 40

BI 41

BI 53

BI 75

BI 92

BI 172

## Energy Saving Technology



Smart Energy Control

Intelligent Temperature Control

## Cooling Units

Compact



Air-cooled

Water-cooled SP

Water-cooled Magnum

SEC



Air-cooled

Water-cooled SP

Water-cooled Magnum

ITC



Air-cooled

Water-cooled SP

Water-cooled Magnum

ITC +



Air-cooled

Water-cooled SP

Water-cooled Magnum

## Ice Makers

Clear



IceDrink Clear

IceDrink Clear WT

White



IceMaker White

IceMaker White WT

IceMaker White Inox

IceMaker Low Profile

IceMaker White BI29

## Divino Wine Cellars & Coolers



Wine Cooler Divino The One

Wine Cooler Divino The Eight

Wine Cellar Divino 23

Wine Cellar Divino 35

## Water Heaters



Basic

Slim

Square

Spa

## Air Heat Exchangers



Air Heat Exchanger

## On Board Safes



Safe 10

Safe 30



# Table of contents

What's new	8
<hr/>	
<b>CRUISE Marine Refrigerators &amp; Freezers</b>	<b>11</b>
Elegance Refrigerators	12
FREELINE Elegance Refrigerators	14
Classic Refrigerators	18
Silver Refrigerators	20
White Refrigerators	21
Inox Refrigerators	22
Inox Combi Refrigerators	23
Inox Clean Touch Refrigerators	25
Classic Freezers	30
Inox Freezers	31
Inox Clean Touch Freezers	31
<hr/>	
<b>DRAWER Marine Refrigerators &amp; Freezers</b>	<b>33</b>
Mini, Inox, Inox Clean Touch, Custom	34
<hr/>	
<b>Cooling Boxes</b>	<b>45</b>
Travel Boxes	46
Built-In Boxes	48
<hr/>	
<b>Master Data Table</b>	<b>54</b>
<hr/>	
<b>Cooling Technology</b>	<b>59</b>
Isotherm ITC Digital Display	60
Isotherm Smart Energy Control	61
Frost-free Technology	62
<hr/>	
<b>Cooling Units</b>	<b>65</b>
<hr/>	
<b>Special Design</b>	<b>88</b>
Refrigerators and Freezers	88
<hr/>	
<b>Ice Makers</b>	<b>91</b>
IceMaker DrinkClear	92
IceMaker White	93
<hr/>	
<b>Wine Cellars &amp; Cooler</b>	<b>95</b>
<hr/>	
<b>Water Heaters</b>	<b>100</b>
Basic, Slim, Square	102
SPA	104
<hr/>	
<b>Air Heat Exchangers</b>	<b>106</b>
<hr/>	
<b>On Board Safes</b>	<b>110</b>
<hr/>	



# Welcome to the Indel Webasto Marine Catalogue IM 03

Indel Webasto Marine, based in Novafeltria in Italy, is the successful Joint Venture between the leading automotive supplier Webasto, based in Germany, and the Italian mobile refrigeration leader Indel B. These two companies joined forces to bring high quality galley equipment solutions to marine applications. Indel Webasto Marine stands for high quality products in the marine industry.




A long history of careful research and development has established the background for successful innovations. Many of these innovations obtained patents and are internationally protected. Our products are exclusively produced using high quality components.

The wide product range consists of refrigerators and freezers, built-in and travel boxes, wine cellars, water boilers, safes as well as customized solutions for more comfort on board. Our refrigeration solutions are well acknowledged for their user-friendliness, their stylish design and their energy saving engineering.

Our product brand names Isotherm and Isotemp are internationally

known and enjoy an excellent reputation on the market for quality and design. They constitute a major asset for our international distribution network.

Indel Webasto Marine offers a unique value proposition in the marine refrigeration industry, built around three pillars. First, our broad product range gives our customers an unrivaled choice of quality product and customization options for a same set of cut-out dimensions. Second, our long tradition for low electricity consumption products has continuously delivered new innovative concepts for energy saving on board, regularly awarded by the industry. Last but not least, our extended, skilled international service network allows a responsive technical support worldwide.



*The production lines in Novafeltria, Italy.*



*Highly skilled workforce.*



*High technology machinery.*

## What's new?

### Cruise 86

- Compact and performing, only 24kgs weight
- BD Micro compressor technology
- Low power consumption, of 0,499kW/24h.
- Optional fixing flange



### Cruise White line refrigerators: When large capacities are easy to be integrated

- Three models available, 205, 223 and 285 liters volume
- Fridge-freezer solutions
- Oversized marine condensers, for greater efficiency
- Flat doors, easy to be integrated in furniture (sliders included)
- AC/DC compatibility via the optional Isotherm Power Pack



Cruise 285 White



Cruise 223 White



Cruise 205 White

### Drawer 42 Inox Clean Touch: The exclusive Inox Clean Touch features in compact dimensions

- Anti-fingerprint Inox Clean Touch door finishing
- Robust drawer mechanism
- BD Micro compressor technology
- Removable condensing unit, up to 1mt. away
- 3 sides flush fixing flange as standard



**NEW**

**IceDrink Clear WT - IceMaker White WT (integrated Water Tank):  
high quality ice cubes from your mineral water**

- Spray technology installed, capable to produce a large amount of ice cubes up to 18 kg per day
- Integrated water tank, for the supply of mineral water
- Easy to install, same external dimensions of the standard Clear Ice version
- Easy to refill, by pouring water in the dedicated container from the front lid



**Ice Maker White: Ice, design and convenience for all boat applications**

- Anti-fingerprint Inox Clean Touch door finishing
- Genuine AC/DC solution
- Removable water tank, easy to clean and refill
- Automatic low power setting mode in DC
- 3 sides flush fixing flange as standard

**Air Heat exchanger: The perfect defrosting solution**

- Available in 12 or 24V versions
- High heat output of 10kW
- Casing in stainless steel
- Four outlets of 60mm in diameter
- Air intake can be channeled with hose adapters



**Isotemp SPA water boilers; When competitive products while meet high quality standards.**

- 7 different sizes, from 15 to 60 liters capacity
- AISI 316 inner tank
- Outer casing in high quality polypropylene
- Extra thick insulation for long-lasting heating performance
- 5 years limited warranty on water tank
- 6 bars safety valve





## Reliable Marine refrigerators and freezers

Isotherm CRUISE refrigerators and freezers are the result of careful research. Marine refrigerators operate under tough conditions: they must withstand violent movement, operate noiselessly, be thoroughly reliable – and perhaps the most important of all – consume an absolute minimum of battery power.

# CRUISE Marine Refrigerators & Freezers

<b>CRUISE Elegance Refrigerators</b>	<b>12</b>
CRUISE 42 EL, 49 EL, 65 EL	14
CRUISE 85 EL, 130 EL	15
<hr/>	
<b>FREELINE Elegance Refrigerators</b>	<b>15</b>
FL 115 EL	15
<hr/>	
<b>CRUISE Classic Refrigerators</b>	<b>16</b>
CRUISE 36, 40 Cubic, 86	18
CRUISE 90, 100, 130 Drink	19
<hr/>	
<b>CRUISE Silver Refrigerators</b>	<b>20</b>
CRUISE 225, 280	20
<hr/>	
<b>CRUISE White Refrigerators</b>	<b>21</b>
CRUISE 205, 223, 285	21
<hr/>	
<b>CRUISE Inox Refrigerators</b>	<b>22</b>
CRUISE 36, 36 Full Inox, 130 Drink, 160 Drink, 200	22
<hr/>	
<b>CRUISE Inox Combi Line</b>	<b>23</b>
CRUISE 195, 220	23
CRUISE 260, 320	24
<hr/>	
<b>CRUISE Inox Clean Touch Refrigerators</b>	<b>25</b>
CRUISE 42, 49, 65	26
CRUISE 85, 130, 130 Speciale	27
<hr/>	
<b>CRUISE Classic, Inox, Inox Clean Touch Freezers</b>	<b>28</b>
CRUISE 63 F, 65 F, 90 F	30
CRUISE Inox 63 F, 65 F	31
CRUISE Inox Clean Touch 90 F	31

# CRUISE Elegance Marine Refrigerators

It is our mission to design and build high-quality and energy efficient marine refrigeration systems exclusively for sailing yachts and motor cruisers. The CRUISE Elegance Marine refrigerators are available in five sizes starting with 42 up to 130 liters capacity. They convince with their infinite design opportunities as the door panel and the handle can be customized according to the customers expectations. The result: a completely in line interior boat design.

## The ultimate combination of style and technology!



- 5 volumes: 42, 49, 65, 85, 130 liters
- Ready for Isotherm SEC and ITC
- Innovative vent-lock system
- Easy-fix installation solutions
- Customizable door panel and handle
- Reliability: Secop compressors
- Extra-thick insulation for low power consumption
- White LED internal lighting

By choosing an Isotherm CRUISE Elegance fridge you will enjoy infinite customization options.

- Standard customization options:



*White*

*Black*


*Teak*

*Wengè*

*White oak*

**Full custom design available on request.** (Please contact Indel Webasto Marine)

## Cruise Elegance Marine Refrigerators

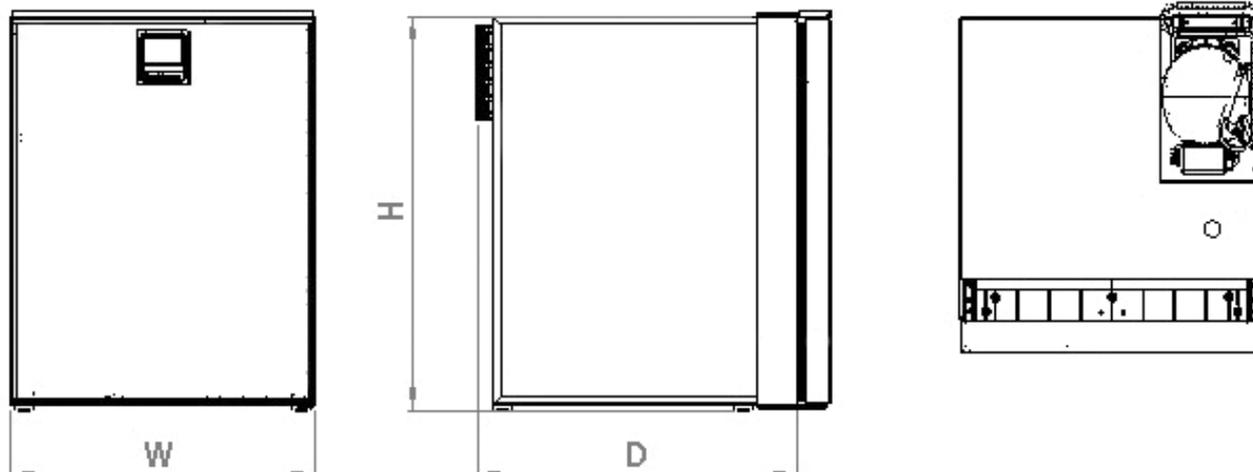



**Vent-lock system**



With a simple slide of the invisible mechanism, CRUISE Elegance fridges can be switched to ventilation status. The door is kept open while the fridge is out of operation.

**Easy-fix installation solution**



The new installation system allows an easy fixing of the cabinet directly from the interior of the fridge. The external flange is no longer necessary for the installation. An innovative internal bushing structure prevents the crushing of the insulated side wall.

**Ready to further reduce power consumption!**

All CRUISE Elegance fridges have been prepared and tested for the installation of Isotherm Smart Energy Control (SEC) and Intelligent Temperature Control (ITC). The location of the sensor is pre-configured in the cabinet, for an easy aftermarket application.



Please refer to Cooling Technology chapter in this catalogue

**Product highlights:**

- A new handle has been designed to open large sized doors from a central position
- Door panel and handle can be customized in a few minutes
- A wide choice is already available from our stock – special requests can also be processed. (> 300 options)
- Branding/Logo on handle can be implemented on request

**Product overview: Isotherm CRUISE Elegance Marine Refrigerators**

Type	Gross volume (l)		Dimensions W x H x D (mm)	Weight (kg)	Power consumption (Wh/24h)	Secop compressor type	Freezer compartment specifications
	Fridge	Freezer					
CR 42 EL	37	5	380 x 525 x 455 <sup>(1) (2)</sup>	14	285	BD1.4F-VSD	* (-6)
CR 49 EL	44	5	380 x 525 x 452 <sup>(2)</sup>	17	265 <sup>(3)</sup>	BD35F	* (-6)
CR 65 EL	60	5	450 x 530 x 473 <sup>(2)</sup>	18	275 <sup>(3)</sup>	BD35F	* (-6)
CR 85 EL	77	8	475 x 627 x 505 <sup>(2)</sup>	22	368 <sup>(3)</sup>	BD35F	* (-6)
CR 130 EL	122	8	525 x 750 x 510 <sup>(2)</sup>	26	418 <sup>(3)</sup>	BD35F	* (-6)
Freeline 115 EL	83	32	525 x 797 x 495 <sup>(2)</sup>	30	257	BD35F	* (-6)

(1) Depth 350+145 mm with remote compressor

(2) Dimensions (to be added) + 50 mm door's depth

(3) Power consumption can be reduced by up to 50 % with the use of an Isotherm Smart Energy Control or ITC device

Power consumption Wh/24h in operation on 12 V with +5°C in the refrigeration space, ambient temperature +25°C according to the Standards ISO 15502:2005 and EN 153:2006 Please refer to the installation manual for further technical/installation details. Specification changes may be made without prior notice.

# CRUISE Elegance


## CRUISE EL 42, 49, 65



### CRUISE 42 EL

The CR 42 EL is the smallest fridge of the CRUISE Elegance line. The fridge features a new inner lining with one adjustable shelf and two retainers inside the door, as well as a freezer compartment with a volume of 5 liters with magnetic steel evaporator door. The compressor, installed on the back of the cabinet, can be removed up to 1 mt. away.

\* Depth only 350 mm when compressor is remote  
50 mm door's thickness not included



Isotherm CRUISE 42 EL	
Weight (Kg)	14
Gross volume (l)	42


ORDER NUMBER	DESCRIPTION
C042RSAAS11111AA	FRIDGE CR42/V ELEGANCE SILVER 12/24V DC



### CRUISE 49 EL

The CR 49 EL features a new inner lining with one adjustable shelf and two retainers inside the door, as well as a freezer compartment with a volume of 5 liters with magnetic steel evaporator door.

\* 50 mm door's thickness not included



Isotherm CRUISE 49 EL	
Weight (Kg)	17
Gross volume (l)	49


ORDER NUMBER	DESCRIPTION
C049RSAAS11111AA	FRIDGE CR 49/V ELEGANCE SILVER 12/24V DC



### CRUISE 65 EL

The CR 65 EL fridge is based on the same inner lining as the CR 49 EL including one adjustable shelf and two retainers inside the door. It also features a freezer compartment with a volume of 5 liters. Magnetic stainless steel evaporator's door.

\* 50 mm door's thickness not included



Isotherm CRUISE 65 EL	
Weight (Kg)	18
Gross volume (l)	65

ORDER NUMBER	DESCRIPTION
C065RSAAS11111AA	FRIDGE CR 65/V ELEGANCE SILVER 12/24V DC

# CRUISE Elegance


## CRUISE EL 85, 130, Freeline 115



### CRUISE 85 EL

The CR 85 EL provides the customer a 8 liter freezer compartment, two adjustable shelves and two retainers inside the door. It is ready for Isotherm Smart Energy Control, like all other CRUISE Elegance fridges. Magnetic stainless steel evaporator's door.

\* 50 mm door's thickness not included



Isotherm CRUISE 85 EL	
Weight (Kg)	22
Gross volume (l)	85


ORDER NUMBER	DESCRIPTION
C085RSAAS11111AA	FRIDGE CR 85/V ELEGANCE SILVER 12/24V



### CRUISE 130 EL

The CR 130 EL features a separated freezer compartment with a volume of 8 liters, two adjustable shelves and three retainers inside the door. It is equipped with a vegetable bin covered by two glass shelves. Magnetic stainless steel evaporator's door.

\* 50 mm door's thickness not included



Isotherm CRUISE 130 EL	
Weight (Kg)	26
Gross volume (l)	130


ORDER NUMBER	DESCRIPTION
C130RSAAS11111AA	FRIDGE CR 130/V ELEGANCE SILVER 12/24V



### FREELINE 115 EL

FREELINE 115 liters Elegance provides 83 liters capacity as fridge and 32 liters as freezer. The freezer compartment allows massive food storage thanks to its full width design; it can contain 4 carton boxes of pizza. It is equipped with a modern LED base control panel flush mounted in the cabinet, that permits an easy fridge operation in selecting temperature and reading error codes. ECO function like the overcooling mode, to store cold energy in food and drinks while a surplus of power is available. Extremely low power consumption (267W) due to extra-thick insulation and its integrated ECO function.

\* 50 mm door's thickness not included



Isotherm FREELINE 115	
Weight (Kg)	30
Gross volume (l)	115

ORDER NUMBER	DESCRIPTION
F115RSAAS11111AA	FRIDGE FREELINE FL 115 ELEGANCE VENTILATED 12/24V

# CRUISE Classic, Silver, White, Inox, Combi Marine Refrigerators

Isotherm CRUISE Refrigerators combine technological innovation with sophisticated, yet practical design. The CRUISE Classic refrigerators are available from 36 liters up to 320 liters and provide numerous customization options.

## Extremely robust yet practical in the use

### Common Product Features:

- Freezer compartment (not on Drink versions)
- High customization possible for door and frame design
- Equipped with interior light
- Installation frame (optional on Cruise Classic and Elegance)
- Very low power consumption
- 12/24 V Secop compressor
- Door with a safety lock and magnetic rubber seal



CRUISE 36 FULL INOX

### Some standard features of the Cruise Inox Line:

- Different side frames: 2 up to 3 side frames for an easy installation and 3 up to 4 side frames for a complete flush integration
- Complete stainless steel design (doors and handles)
- Different cooling systems: ventilated as standard, water-cooled with a self pumping kit (patented) and water-cooled through a sea water pump for tropical conditions as option




CRUISE 160 DRINK INOX

### Some standard features of the Cruise Classic line:

- Fan-cooled 12/24 V Secop compressor
- Custom door panels to complement any interior (grey door as standard)
- Freezer compartment (except Drink versions)
- One piece inner lining of food-quality, high density plastic with rounded corners for easy cleaning
- Constructed of corrosion resistant materials
- Interior light (not on CR 36, CR 100)
- Magnetic rubber seals keep moisture out and door firmly closed
- Right hand or left hand side opening possible\*


### Cruise Marine Refrigerators Classic

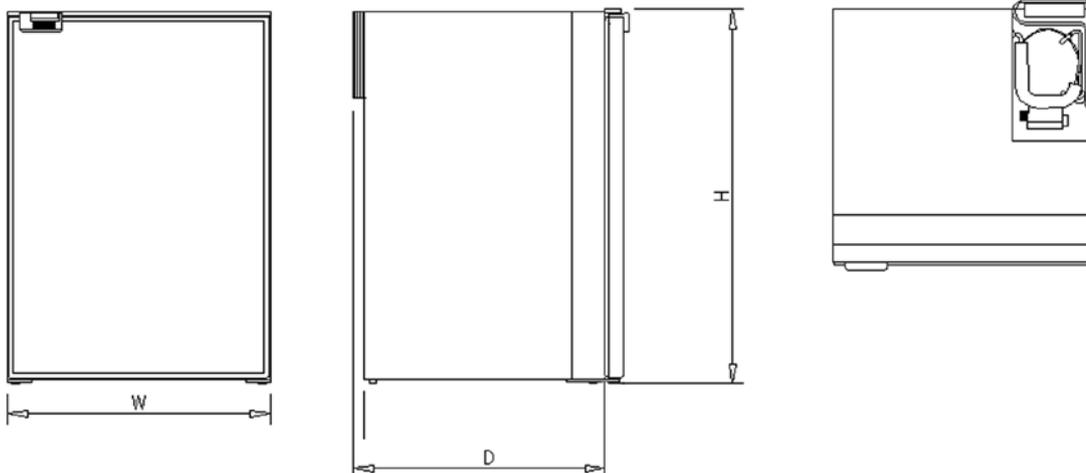

\*Due to the door latch position on some CRUISE Stainless Steel Inox line models (CR 90 Freezer, CR 130 Drink, CR 130 and CR 195), right or left swing must be stated when ordering



**Cruise Marine Refrigerators Inox**

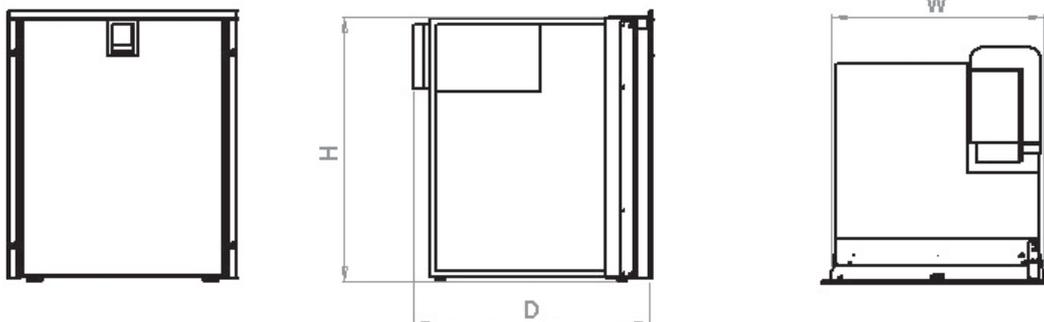

**Product Overview: Isotherm CRUISE Marine Refrigerators**

Type	Gross volume (l)		Dimensions W x H x D (mm)	Available with		Weight (kg)	Power consumption Wh/24h	Secop compressor type	Freezer compartment specifications
	Fridge	Freezer		SEC	ITC				
CR 36 Classic	36	–	440 x 250 x 685 <sup>(1) (2)</sup>			16	300	BD35F	–
CR 36 Inox / 36 Full Inox	36	–	455 x 255 x 715 <sup>(3)</sup>			17	300	BD35F	–
CR 40 Cubic	40		420 x 435 x 585 <sup>(4) (5)</sup>			18	186	BD35F	** (-12°C)
CR 42 Classic	37	5	380 x 525 x 455 <sup>(5) (6)</sup>			14	300	BD1.4F-VSD	* (-6°C)
CR 49 Classic	44	5	386 x 525 x 452 <sup>(5)</sup>	X	X	16	278	BD35F	* (-6°C)
CR 65 Classic	60	5	450 x 530 x 473 <sup>(5)</sup>	X	X	19	288	BD35F	* (-6°C)
CR 85 Classic	77	8	475 x 627 x 505 <sup>(5)</sup>	X	X	22	386	BD35F	* (-6°C)
CR 86 Classic	76	10	380 x 850 x 495 <sup>(5)</sup>			24	499	BD1.4F-VSD	* (-6°C)
CR 90 Classic	70	20	476 x 850x 430 <sup>(5)</sup>	X	X	24	520	BD35F	*** (-18°C)
CR 100 Classic	94	6	486 x 745 x 455 <sup>(5)</sup>	X	X	26	400	BD35F	* (-6°C)
CR 130 Classic	122	8	525 x 750 x 510 <sup>(5)</sup>	X	X	23	438	BD35F	* (-6°C)
CR 130 Drink	130	–	527 x 750 x 520 <sup>(5)</sup>	X	X	27	400	BD35F	–
CR 130 Drink Inox	130	–	544 x 750 x 560	X	X	32	400	BD35F	–
CR 160 Drink Inox	160	–	626 x 870 x 610	X	X	40	512	BD50F	–
CR 195 Combi Classic	130	65	551 x 1347 x 565	X <sup>(8)</sup>	X <sup>(8)</sup>	54	840	2 x BD35F	*** (-18°C)
CR 195 Combi Inox	130	65	544 x 1347 x 565	X <sup>(8)</sup>	X <sup>(8)</sup>	54	840	2 x BD35F	*** (-18°C)
CR 200 Classic	150	50	731 x 880 x 620			53	874	BD50F	** (-12°C)
CR 200 Inox	150	50	731 x 880 x 620			53	874	BD50F	** (-12°C)
CR 205 White	175	30	540 x 1205 x 506 <sup>(5)</sup>			36		BD50F	*** (-18°C)
CR 220 Combi Inox	130	90	544 x 1545 x 560	X <sup>(8)</sup>	X <sup>(8)</sup>	61	1070	2 x BD35F	*** (-18°C)
CR 223 White	168	55	540 x 1441 x 506 <sup>(5)</sup>			40		BD50F	*** (-18°C)
CR 225 Silver	188	45	547 x 1444 x 506 <sup>(7)</sup>			36	–	BD50F	*** (-18°C)
CR 260 Combi Inox	244	16	544 x 1545 x 560	X	X	64	836	2 x BD35F	* (-6°C)
CR 280 Silver	235	45	547 x 1700 x 486 <sup>(7)</sup>			41	–	BD50F	*** (-18°C)
CR 285 White	205	80	540 x 1790 x 506 <sup>(5)</sup>			53		BD50F	*** (-18°C)
CR 320 Combi Inox			628 x 1790 x 610	X <sup>(8)</sup>	X <sup>(8)</sup>	85			
Fridge/Fridge	320						1042	2 x BD50F	–
Fridge/Freezer	250	70					1147	BD50F + BD80F	* (-6°C)
Freezer/Freezer	160	160					1609	BD50F + BD80F	** (-12°C)

(1) Door thickness (to be added): 35 mm - (2) Depth 556+170 mm with remote compressor - (3) Depth 595+170 mm with remote compressor - (4) Depth 460+170 mm with remote compressor - (5) Door thickness (to be added): 40 mm - (6) Depth 350+145 mm with remote compressor - (7) Door thickness (to be added): 70 mm - (8) Available for fridge compartment only. Power consumption Wh/24h in operation on 12 Volt with +5°C in the refrigeration space, ambient temperature +25°C according to the Standards ISO 15502:2005 and EN 153:2006. Refrigerators manufacturing tolerances -2/+4 mm - Dimensions include refrigerator's feet. According to EN 603335 - 1 regulation, the inside walls of the furniture housing the refrigerator must be distant from the fridge by 20 mm per side and 50 mm from the top. Most of Isotherm fridges can also benefit from a retrofitted Isotherm Smart Energy Control kit. On some models it reduces battery consumption by up to 50%.

Please refer to the installation manual for further technical/installation details. Specification changes may be made without prior notice.

# CRUISE Classic


CRUISE 36, 40 Cubic, 42, 86



## CRUISE 36

The CR 36 is a built-in drawer fridge with unique design. Due to its compact dimensions, the CR 36 can be installed where no other fridge might fit. The compressor can be removed up to 1.20 meter away. It comes with a white door and mounting frame as standard.

\* Depth only 556 mm when compressor is remote  
35 mm door's thickness not included



Isotherm CRUISE 36	
Weight (Kg)	17
Gross volume (l)	36


ORDER NUMBER	DESCRIPTION
1036BA1G00000	FRIDGE CRUISE WHITE 36/V



## CRUISE 40 Cubic

The CR 40 Cubic can be used as a fridge or freezer and installed both as a front opening fridge or freezer (Cruise) or as a top opening fridge or freezer (Built-In box). As standard installation the CR 40 Cubic is an ordinary front opening fridge or freezer. By changing position, it can be mounted like a cockpit top opening fridge or freezer as the Isotherm Built-In line products. The compressor can be removed up to 1 meter away.

\* Depth only 460 mm when compressor is remote  
40 mm door's thickness not included



Isotherm CRUISE 40 Cubic	
Weight (Kg)	18
Gross volume (l)	40


ORDER NUMBER	DESCRIPTION
1040BB1AC0000	FRIDGE OR FREEZER CRUISE CUBIC 40/V



**NEW**

## CRUISE 86

The Cruise 86 is a refrigeration solution about 86 liters gross volume, provided with a large freezer compartment of 10litres. It is provided by the reliable BD Micro compressor technology, that contributes to a general low weight of 24kgs and to a low power consumption of 0,499kW/24h. Its "slim line design" makes possible applications in narrow spaces, with the easiness of an optional modular fixing flange.




Isotherm CRUISE 86	
Weight (Kg)	24
Gross volume (l)	86

ORDER NUMBER	DESCRIPTION
C086RBAN11111AA	FRIDGE CRUISE CLASSIC BLACK PANEL 86/V

# CRUISE Classic

## CRUISE 90, 100, 130 Drink




Isotherm CRUISE 90	
Weight (Kg)	24
Gross volume (l)	90

ORDER NUMBER	DESCRIPTION
1090BB1AA0000	FRIDGE AND FREEZER CRUISE 90/V

### CRUISE 90

The CR 90 is a two door fridge-freezer solution. The refrigerator provides a volume of 70 liters and the freezer a volume of 20 liters. The refrigerator is equipped with interior light.

\* 40 mm door's thickness not included




Isotherm CRUISE 100	
Weight (Kg)	27
Gross volume (l)	100

ORDER NUMBER	DESCRIPTION
1100BA1AA0000	FRIDGE CRUISE 100/V

### CRUISE 100

The CR 100 differentiates itself with air ducts and fan ventilated compressor which permits circulation even in tight installations. Additional mounting frames are available as an option.

\* 40 mm door's thickness not included



Isotherm CRUISE 130 Drink	
Weight (Kg)	26
Gross volume (l)	130

ORDER NUMBER	DESCRIPTION
1130BA1AA0000	FRIDGE CRUISE DRINK 130/V

### CRUISE 130 Drink

The CR 130 D is a special version of the CR 130 providing the customer with an extra space for drinks instead of the freezer compartment. It is equipped with interior light and a fan for cool air distribution inside the fridge. Wine bottle racks, are available as option.

\* 40 mm door's thickness not included

# CRUISE Silver

## CRUISE 225, 280




**NEW**

### CRUISE 225 Silver

The CR 225 is a two door fridge-freezer solution. The refrigerator provides a volume of 183 liters and the freezer a volume of 42 liters. The refrigerator is equipped with interior light, three shelves and two vegetable bins at the bottom.

\* 70 mm door's thickness not included



Isotherm CRUISE 225	
Weight (Kg)	36
Gross volume (l)	180 + 45

ORDER NUMBER	DESCRIPTION
C225RNASP14111AA	FRIDGE AND FREEZER SILVER CR225/V




**NEW**

### CRUISE 280 Silver

The CR 280 is a two door fridge-freezer solution. The refrigerator provides a volume of 238 liters and the freezer a volume of 42 liters. The refrigerator is equipped with interior light, four shelves and two vegetable bins at the bottom.

\* 70 mm door's thickness not included



Isotherm CRUISE 280	
Weight (Kg)	41
Gross volume (l)	235 + 45

ORDER NUMBER	DESCRIPTION
C280RNASP14111AA	FRIDGE AND FREEZER CRUISE SILVER CR280/V

# CRUISE White

CRUISE 205, 223, 285




**NEW**

## CRUISE 205 White

The Cruise 205 White is a single door fridge-freezer solution of about 205 liters gross volume. The refrigerator provides a volume of 30 liters and the freezer a volume of 175 liters. The Secop compressor is integrated into a system solution capable to cope with marine environments, thanks to an oversize extra condenser. The application is made possible via the flat door, that with the dedicated slider allow customers to integrate the product to perfection. Panel's finishing and locking mechanism are customizable by the clients and the AC/DC compatibility is possible via the optional isotherm Power Pack.

\* 40 mm door's thickness not included



Isotherm CRUISE 205	
Weight (Kg)	36
Gross volume (l)	175 + 30

ORDER NUMBER	DESCRIPTION
C205RNACP14111AA	FRIDGE AND FREEZER CRUISE WHITE CR205/V




**NEW**

## CRUISE 223 White

The Cruise 223 White is a double door fridge-freezer solution. The refrigerator provides a volume of 55 liters and the freezer a volume of 168 liters. The Secop compressor is integrated into a system solution capable to cope with marine environments, thanks to an oversize extra condenser. The application is made possible via the flat doors, that with the dedicated sliders allow customers to integrate the product to perfection. Panel's finishing and locking mechanism are customizable by the clients and the AC/DC compatibility is possible via the optional isotherm Power Pack.

\* 40 mm door's thickness not included



Isotherm CRUISE 223	
Weight (Kg)	40
Gross volume (l)	168 + 55

ORDER NUMBER	DESCRIPTION
C223RNACP14111AA	FRIDGE AND FREEZER CRUISE WHITE CR223/V




**NEW**

## CRUISE 285 White

The Cruise 285 White is a double door fridge-freezer solution. The refrigerator provides a volume of 80 liters and the freezer a volume of 205 liters. The Secop compressor is integrated into a system solution capable to cope with marine environments, thanks to an oversize extra condenser. The application is made possible via the flat doors, that with the dedicated sliders allow customers to integrate the product to perfection. Panel's finishing and locking mechanism are customizable by the clients and the AC/DC compatibility is possible via the optional isotherm Power Pack.

\* 40 mm door's thickness not included



Isotherm CRUISE 285	
Weight (Kg)	53
Gross volume (l)	205 + 80

ORDER NUMBER	DESCRIPTION
C285RNACP14111AA	FRIDGE AND FREEZER CRUISE WHITE CR285/V

# CRUISE Inox

## CRUISE 36, 36 Full Inox, 130 Drink, 160 Drink, 200




**For application in open deck areas we recommend the use of the FULL INOX version, with cabinet's body in stainless steel**

### CRUISE 36 Inox

The CR 36 Inox is a built-in drawer fridge with unique design. Due to its compact dimensions, the CR 36 Inox can be installed where no other fridge might fit. The compressor can be removed up to 1.20 meter away. The Inox model comes with a four side flush mounting frame as standard.

\* Depth only 585 mm when compressor is remote




Isotherm CRUISE 36 Inox	
Weight (Kg)	17
Gross volume (l)	36

ORDER NUMBER	DESCRIPTION
1036BA1EK0000	FRIDGE CRUISE INOX 36/V
1036BA1EK0012	FRIDGE CRUISE INOX 36/V FULL INOX



### CRUISE 130 Drink Inox

The CR 130 D Inox is the stainless steel design version of the CR 130 D providing the customer with an extra space for drinks instead of the freezer compartment. It is equipped with interior light and a fan for cool air distribution inside the fridge.




Isotherm CRUISE 130 Drink Inox	
Weight (Kg)	32
Gross volume (l)	130

ORDER NUMBER	DESCRIPTION
1130BA1MK0000	FRIDGE CRUISE DRINK INOX 130/V



### CRUISE 160 Drink Inox

The CR 160 D Inox is a stainless steel fridge unit, specifically designed to offer spacious on board storage for drinks and beverage, keeping them always at the right temperature thanks to the ventilated evaporator on the back. It is provided with an elegant LED light and it is available with right or left hinged door, nicely integrated thanks to its 3 sides flush flange. Having the same cut-out dimensions of the Drawer 160 Inox light, it is ideal for a side by side application.



Isotherm CRUISE 160 Drink Inox	
Weight (Kg)	40
Gross volume (l)	160


ORDER NUMBER	DESCRIPTION
C160RNEIA12111AA	FRIDGE CRUISE DRINK INOX 160/V



### CRUISE 200 Inox

The CR 200 Inox is a stylish new fridge-freezer in stainless steel design that has been developed to offer spacious on board storage for fresh and frozen foods. It is designed for easy installation under the work surface. The CR 200 Inox is divided into a 150 liters volume fridge section and a 50 liters volume freezer section.

\* Available also with classic doors



Isotherm CRUISE 200 Inox	
Weight (Kg)	53
Gross volume (l)	200

ORDER NUMBER	DESCRIPTION
1200BB1XK0000	FRIDGE AND FREEZER CRUISE INOX 200/V

# CRUISE Combi Inox

## CRUISE 195, 220

### COMBI Line Available as

- 1. Refrigerator
- 2. Freezer
- 3. Ice Maker
- 4. Refrigerator with freezer compartment

1
2
3
4




- 1
- 2

### CRUISE 195 Combi Inox

The CR 195 Inox is a two door fridge-freezer solution combining a CR 130 refrigerator and a 65 liters freezer. The refrigerator comes with interior light and a vegetable bin. CR195 Inox is equipped with two fan-cooled compressors, separate thermostats for the fridge and freezer sections and is delivered with a flush mounting frame.

\* Available also with classic doors



Isotherm CRUISE 195 Combi	
Weight (Kg)	54
Gross volume (l)	130 + 65


ORDER NUMBER	DESCRIPTION
1195BB1MK0000	FRIDGE AND FREEZER CRUISE COMBI INOX 195/V



- 1
- 2

### CRUISE 220 Combi Inox

The CR 220 Inox is a two door fridge-freezer solution in stainless steel, combining a CR 130 fridge on top of a CR 90 liters freezer. Equipped with two fan-cooled compressors with separate thermostats, this combination grants maximum cooling performance. An elegant flush frame is provided, with inner ventilation grilles to easier condenser's cool down process.



Isotherm CRUISE 220 Combi	
Weight (Kg)	61
Gross volume (l)	130+90

ORDER NUMBER	DESCRIPTION
C220RNEIA14111AA	FRIDGE AND FREEZER CRUISE COMBI INOX 220/V

# CRUISE Combi Inox

## CRUISE 260, 320

### COMBI Line Available as

- 1. Refrigerator
- 2. Freezer
- 3. Ice Maker
- 4. Refrigerator with freezer compartment


1
2
3
4



1
4

### CRUISE 260 Combi Inox

The CR 260 Inox is a spacious fridge-fridge solution designed for big vessels. A CR 130 drink refrigerator is positioned on the top, with a practical Drawer 130 liter fridge unit at the bottom. The hybrid combinations of front opening door and the bottom drawer concept gives the CR 260 a stylish and practical impression. The Drawer 130 it is provided with a large drawer mechanism base freezer compartment, and can be delivered with an optional 4th side frame with off-shore lock included.



Isotherm CRUISE 260 Combi	
Weight (Kg)	64
Gross volume (l)	130+130


ORDER NUMBER	DESCRIPTION
C260ANEIA11111AA	FRIDGE CRUISE COMBI INOX 260/V



1	1	1
1	1	2
1	2	2

### CRUISE 320 Combi Inox

The CR 320 Inox is an hybrid modular unit, that joins large liter capacity with practical and stylish appearance. A new Cruise 160 Drink is positioned on the top, with a double drawer unit located at the bottom. As per current configuration possibilities, DR 160 Inox can be specified in tree versions: both drawers as fridge, both drawers as freezer, one drawer fridge and the other freezer.



Isotherm CRUISE 320 Combi	
Weight (Kg)	85
Gross volume (l)	160+160

ORDER NUMBER	DESCRIPTION
C320ANEIA1A111AA	FRIDGE, FRIDGE AND FRIDGE CRUISE COMBI INOX 320/V
C320ANEIA1B111AA	FRIDGE, FRIDGE AND FREEZER CRUISE COMBI INOX 320/V
C320ANEIA1C111AA	FRIDGE, FREEZER AND FREEZER CRUISE COMBI INOX 320/V

# CRUISE Inox Clean Touch Marine Refrigerators

The Inox Clean Touch represents the latest development of the world-wide appreciated Elegance product line. It combines in fact the Cruise Elegance line features (except Vent-Lock system) with a new door design in stainless steel especially treated to avoid fingerprints (Inox anti-fingerprint). This new material combines a state of the art marine design with a very easy cleaning and maintenance of the refrigerator. The Elegance line handle is nicely flush mounted into a new door and centrally located to allow easy switch of the hinge opening side.



- 5 volumes: 42, 49, 65, 85, 130 liters
- 3 sides flush mounting frame as standard, 4th side as optional
- High quality stainless steel balcony profiles
- Ready for Isotherm Smart Energy Control & ITC
- Easy fix installation solution
- Reliability: Secop compressors
- Extra-thick insulation for low power consumption
- White LED internal light



## Product Overview: Isotherm CRUISE Inox Clean Touch Marine Refrigerators

Type	Gross volume (l)		Dimensions W x H x D (mm)	Available with SEC and ITC	Weight (kg)	Power consumption (Wh/24h)	Secop compressor type	Freezer compartment specifications
CR 42 Inox Clean Touch	37	5	400 x 525 x 500 <sup>(1)</sup>		15	285	BD1.4F-VSD	* (-6°C)
CR 49 Inox Clean Touch	44	5	400 x 525 x 500	X	18	265	BD35F	* (-6°C)
CR 65 Inox Clean Touch	60	5	470 x 530 x 520	X	21	275	BD35F	* (-6°C)
CR 85 Inox Clean Touch	77	8	495 x 627 x 550	X	24	368	BD35F	* (-6°C)
CR 130 Inox Clean Touch	122	8	545 x 750 x 555	X	27	418	BD35F	* (-6°C)
CR 130 Inox Clean Touch Speciale <sup>(2)</sup>	122	8	545 x 794 x 585	X	29	418	BD35F	* (-6°C)

(1) Depth 410+140 mm with remote compressor - (2) It is equipped with a 4-sided Flush stainless steel flange.  
 Power consumption Wh/24h in operation on 12 Volt with +5 °C in the refrigeration space, ambient temperature +25 °C according to the Standards ISO 15502:2005 and EN 153:2006  
 Refrigerators manufacturing tolerances -2 / +4 mm  
 Dimensions include refrigerator's feet  
 According to EN 603335 - 1 regulation, the inside walls of the furniture housing the refrigerator must be distant from the fridge by 20 mm per side and 50 mm from the top  
 Please refer to the installation manual for further technical / installation details  
 Most of Isotherm fridges can also benefit from a retrofitted Isotherm Smart Energy Control kit. On some models it reduces battery consumption by up to 50 %  
 Please refer to the installation manual for further technical/installation details  
 Specification changes may be made without prior notice.

# CRUISE Inox Clean Touch


## CRUISE 42, 49, 65



### CRUISE 42 Inox Clean Touch

The CR 42 Inox Clean Touch is the stainless steel design version of the CR 42. The Inox Clean Touch version also provides the possibility of removing the compressor unit on the back, up to 1 meter away.

\* Depth only 400 mm when compressor is remote




Isotherm CRUISE 42 Inox Clean Touch	
Weight (Kg)	15
Gross volume (l)	42

ORDER NUMBER	DESCRIPTION
C042RNEIT11111AA	FRIDGE CRUISE INOX CLEAN TOUCH 42/V



### CRUISE 49 Inox Clean Touch

The CR 49 Inox Clean Touch is the stainless steel design version of the CR 49. The Inox Clean Touch version also provides the built-in compressor giving better inside dimensions for standing and lying PET bottles. As standard, it is equipped with installation frame and interior LED light.




Isotherm CRUISE 49 Inox Clean Touch	
Weight (Kg)	16
Gross volume (l)	49

ORDER NUMBER	DESCRIPTION
C049RNEIT11111AA	FRIDGE CRUISE INOX CLEAN TOUCH 49/V



### CRUISE 65 Inox Clean Touch

The CR 65 Inox Clean Touch is the stainless steel design version of the CR 65. It features a separated freezer compartment and a built-in compressor unit. It is equipped with installation frame and interior LED light as standard.



Isotherm CRUISE 65 Inox Clean Touch	
Weight (Kg)	21
Gross volume (l)	65

ORDER NUMBER	DESCRIPTION
C065RNEIT11111AA	FRIDGE CRUISE INOX CLEAN TOUCH 65/V


# CRUISE Inox Clean Touch

CRUISE 85, 130, 130 Speciale



## CRUISE 85 Inox Clean Touch

The CR 85 Inox Clean Touch is the stainless steel design version of the CR 85. It provides a freezer compartment, two adjustable shelves and a corner-mounted compressor. Interior LED light as standard. Installation flush mounting frames standard (valid for all Inox models).




Isotherm CRUISE 85 Inox Clean Touch	
Weight (Kg)	24
Gross volume (l)	85

ORDER NUMBER	DESCRIPTION
C085RNEIT11111AA	FRIDGE CRUISE INOX CLEAN TOUCH 85/V



## CRUISE 130 Inox Clean Touch

The CR 130 Inox Clean Touch is the stainless steel design version of the CR 130 providing a freezer compartment, three shelves, a vegetable bin and a door divided into three sections. It is equipped with interior LED light and a fan cooled compressor as standard.




Isotherm CRUISE 130 Inox Clean Touch	
Weight (Kg)	27
Gross volume (l)	130

ORDER NUMBER	DESCRIPTION
C130RNEIT11111AA	FRIDGE CRUISE INOX CLEAN TOUCH 130/V



## Cruise 130 Inox Clean Touch Speciale

The Cruise 130 Inox Clean Touch Speciale is a dedicated version of the CR 130 Inox Clean Touch in stainless steel design, that provides two additional exclusive features. Its flush mounting flange is designed with an integrated upper grille, that together with a custom design air conveyer grants the full rear installation recess, and a safe product venting. In the inside a large bottom bin, integrated with a drainage system ensures water discharge, when humidity accumulates in the cabinet while in use.



Isotherm CRUISE 130 Inox Clean Touch Speciale	
Weight (Kg)	29
Gross volume (l)	130

ORDER NUMBER	DESCRIPTION
C130RNNIT11111AA	FRIDGE CRUISE INOX CLEAN TOUCH SPECIALE 130/V - FRAME 3 SIDES AND LOWER SIDE IN BOX



# CRUISE Classic, Inox & Inox Clean Touch Marine Freezers

The Isotherm CRUISE freezer units are the perfect complement to CRUISE refrigerators. The high-quality freezers ensure the perfect and constant temperature to keep frozen food on board.




- Extra thick insulation, for excellent cooling performance and low power consumption
- 12/24 V Secop compressor
- Door with safety lock and magnetic rubber seal
- Excellent solution for a side by side fridge-freezer application
- Isotherm Power Pack ready for AC/DC application

## Cruise Marine Freezers Classic

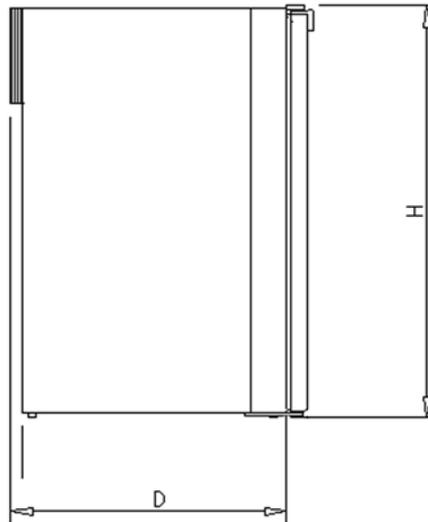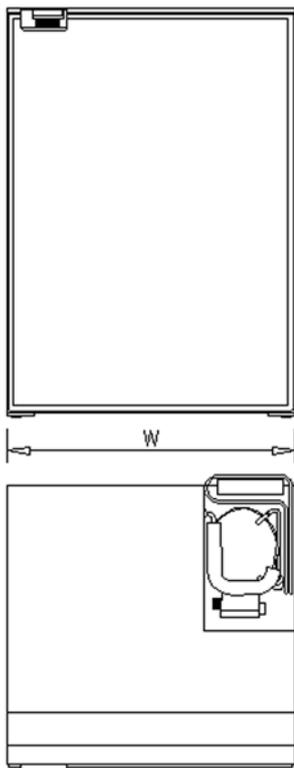



**Cruise Marine Freezers Inox**

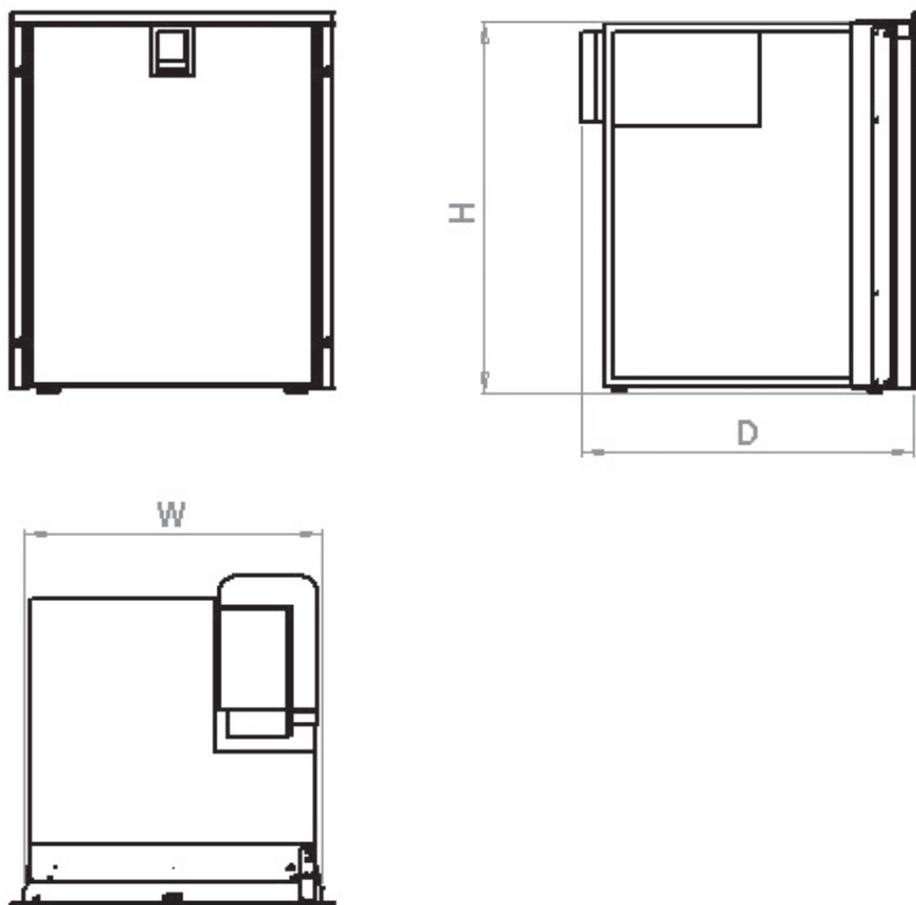

**Product Overview: Isotherm CRUISE Marine Freezers**

Type	Gross volume (l)	Dimensions W x H x D (mm)	Weight (kg)	Power consumption (Wh/24h)	Secop compressor type	Freezer compartment specifications
CR 63 F	63	475 x 620 x 513 <sup>(1)</sup>	23	440	BD35F	* * * (-18°C)
CR 63 F Inox	63	494 x 623 x 552	25	440	BD35F	* * * (-18°C)
CR 65 F	65	525 x 610 x 540 <sup>(1)</sup>	23	458	BD35F	* * * (-18°C)
CR 65 F Inox	65	544 x 610 x 580	23	458	BD35F	* * (-18°C)
CR 90 F	90	525 x 750 x 515 <sup>(1)</sup>	28	670	BD35F	* * (-12°C)
CR 90 F Inox Clean Touch	90	545 x 750 x 565	29	626	BD35F	* * (-12°C)

(1) Door thickness (to be added): +40 mm

Power consumption Wh/24h in operation on 12 Volt with -18°C in the freezer space, ambient temperature +25°C according to the Standards ISO 15502:2005 and EN 153:2006

Refrigerators manufacturing tolerances -2/+4 mm

Dimensions include refrigerator's feet

Isotherm Power Pack available for AC/DC application.

According to EN 60335 - 1 regulation, the inside walls of the furniture housing the refrigerator must distance from the fridge by 20 mm per side and 50 mm from the top

Please refer to the installation manual for further technical/installation details

Specification changes may be made without prior notice.

# CRUISE Classic


## CRUISE 63 F, 65 F, 90 F



### CRUISE 63 Freezer

The CR 63 Freezer has the same outside dimensions as CR 85 fridge. Therefore these units can be perfectly mounted side by side. CR 63 F is equipped with two shelves and a bin at the bottom. It has a corner-mounted compressor and the evaporator piping is integrated in the walls.

\* 40 mm door's thickness not included



Isotherm CRUISE 63 Freezer	
Weight (Kg)	23
Gross volume (l)	63


ORDER NUMBER	DESCRIPTION
1063BC1AA0000	FREEZER CRUISE 63/V



### CRUISE 65 Freezer

The CR 65 Freezer is a 65 liters volume freezer with extra thick insulation. It is equipped with one shelf and a plastic basket at the bottom. The CR 65 F is delivered with a fan-cooled compressor.

\* 40 mm door's thickness not included



Isotherm CRUISE 65 Freezer	
Weight (Kg)	22
Gross volume (l)	65


ORDER NUMBER	DESCRIPTION
1065BC1AA0000	FREEZER CRUISE 65/V



### CRUISE 90 Freezer

The CR 90 Freezer has the same outside dimensions as the CR130 fridge. Therefore these units can be perfectly mounted side by side. The CR 90 F is equipped with three shelves and four separate lids. It is delivered with a fan-cooled compressor. The top compartment operates as chiller (0 to -3°C).

\* 40 mm door's thickness not included



Isotherm CRUISE 90 Freezer	
Weight (Kg)	28
Gross volume (l)	90

ORDER NUMBER	DESCRIPTION
1090BC1AA0000	FREEZER CRUISE 90/V


# CRUISE Inox & Clean Touch

CRUISE 63 F, 65 F, 90 F



## CRUISE 63 Freezer Inox

The CR 63 Freezer Inox has the same outside dimensions as CR 85 Inox fridge. Therefore these units can be perfectly mounted side by side. CR 63 F Inox is equipped with two shelves and a bin at the bottom. It has a corner-mounted compressor and the evaporator piping is integrated in the walls.




Isotherm CRUISE 63 Freezer Inox	
Weight (Kg)	25
Gross volume (l)	63

ORDER NUMBER	DESCRIPTION
1063BC1MK0000	FREEZER CR63/V INOX WITH FLUSH MOUNTING 12/24V



## CRUISE 65 Freezer Inox

The CR 65 Freezer Inox is a 65 liters volume freezer with extra thick insulation. It is equipped with one shelf and a plastic basket at the bottom. The CR 65 F is delivered with a fan-cooled compressor.




Isotherm CRUISE 65 Freezer Inox	
Weight (Kg)	23
Gross volume (l)	65

ORDER NUMBER	DESCRIPTION
1065BC1MK0000	FREEZER CR65/V INOX WITH FLUSH MOUNTING 12/24V



## CRUISE 90 FREEZER Inox Clean Touch

The CR 90 Freezer Inox Clean Touch with a door in stainless steel especially treated to avoid fingerprints (Inox anti-fingerprint material) has the same outside dimensions, (just 1 cm deeper), as the CR 130 fridge Inox Clean Touch. Therefore these units can be perfectly mounted side by side. The CR 90 Freezer Inox Clean Touch is equipped with three shelves and four separate lids. It is delivered with a fan-cooled compressor as standard. The top compartment operates as chiller (0 to -3°C).



Isotherm CRUISE 90 Freezer Inox Clean Touch	
Weight (Kg)	29
Gross volume (l)	90

ORDER NUMBER	DESCRIPTION
C090RNEIT13111AA	FREEZER CRUISE INOX CLEAN TOUCH 90/V



## Easy access to drinks and food: the Isotherm drawer fridges and freezers

The convenient drawer openings allow an easy access to food and drinks.  
An extraordinary stylish design rounds up these highly functional units.

## DRAWER Marine Refrigerators & Freezers

DRAWER 16 - Silver	37
DRAWER 30 Black - Silver	37
DRAWER 30 White	38
DRAWER 42 Inox Clean Touch	38
DRAWER 49 Inox Clean Touch	38
DRAWER 55 Inox Frost-free	38
DRAWER 65 Inox	39
DRAWER 65 Inox Frost-free	39
DRAWER 70 Inox Clean Touch	40
DRAWER 85 Inox	40
DRAWER 100 Inox	41
DRAWER 105 Inox	41
DRAWER 130 Inox	41
DRAWER 160 Inox Light	42
DRAWER 190 Inox	43

# DRAWER Marine Refrigerators & Freezers

## Drawer technology for best everyday use!

Isotherm drawer fridges and freezers stand for great design and user-friendliness. High-quality material and robust construction ensure long life time.



- High-tech design
- Easy access, comfortable to use
- Freezer compartment (-6°C)
- Robust drawer mechanism
- Removable drawers for easy cleaning
- Unique Frost-free feature on some models



### Special features of the drawer line include:

- Different side frames: 3 to 4 side frames available, in order to obtain flush mounted installation
- Different cooling systems: ventilated as standard, water-cooled with a self pumping kit (patented) and water-cooled through a sea water pump for tropical conditions
- Isotherm Power Pack available for AC/DC application: allows sufficient power supply all over the world
- Customized frames for side by side applications
- The innovative Isotherm off shore lock prevents the door from being accidentally opened
- Available with the award winning Frost-free concept that provides increased energy efficiency: ice accumulation and the resulting higher energy consumption are prevented





**Drawer Inox Clean Touch: when marine grade design meets unrivalled comfort in use.**

The exclusive Inox Clean Touch technology, made by a stainless steel door especially treated to avoid fingerprints, is now combined with the easy-to-use drawer mechanism. A strip of 5 LED lights provides an elegant internal atmosphere, where drawers are designed with practical interior dividers.


- Exclusive inox Clean Touch finishing
- Robust and practical drawer mechanism
- 3 side stainless steel fixing flange available as standard
- 5 models available, 42 49, 65, 70 and 100 liters




**Drawer Customization concept:**

Indel Webasto Marine provides its customers with even more customization possibilities. On models, 49, 55, 65, 70, 160 and 190 it is now possible to customize the door front. The drawer fridge or freezer is supplied with a specifically foamed door ready to be customized, for example, with a real wooden panel supplied by the customer. The panel fixing kit is supplied with the product. Thanks to this new technology it is now possible to select both the finishing of the panel and the handle design, according to the interior of the boat.

- Perfect integration into the interior design
- Optional door panel mounting brackets
- Side-by-side installation of fridge and freezer
- Customizable safety door locks

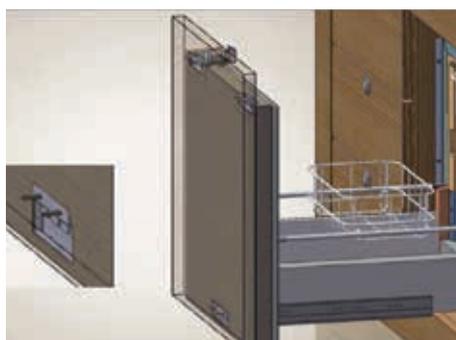

# DRAWER Marine Refrigerators & Freezers

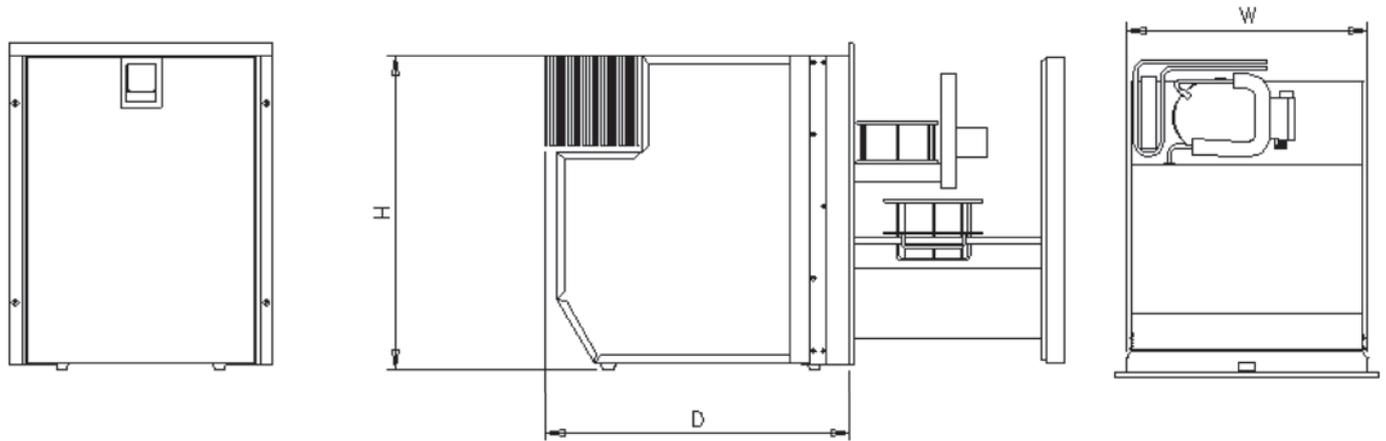

## Product Overview: Isotherm Drawer Marine Refrigerators and Freezers

Type	Gross volume (l)		Dimensions W x H x D (mm)	Weight (kg)	Power consumption (Wh/24h)	Secop compressor type	Freezer compartment specifications
	Fridge	Freezer					
DR 16	16		380 x 250 x 540 <sup>(1)</sup>	13	252	BD1.4F-FSD	* (-6°C)
DR 30	30	–	440 x 260 x 700 <sup>(2)</sup>	18	244	BD1.4F-FSD	–
DR 42 Inox Clean Touch	34	8	399 x 519 x 511	18	333	BD1.4F-VSD	54
DR 49 Inox Clean Touch	41	8	399 x 519 x 497	18	399	BD1.4F-VSD	* (-6°C)
DR 55 Inox Freezer Frost-free	–	55	469 x 525 x 555	26	741	BD35F	** (-12°C)
DR 65 Inox	53	12	470 x 526 x 545	28	470	BD35F	* (-6°C)
DR 65 Inox Frost-free	65	–	469 x 525 x 555	28	310	BD35F	–
DR 65 Inox Clean Touch	54	11	470 x 525 x 520	21	324	BD1.4F-VSD	* (-6°C)
DR 70 Inox Fridge Clean Touch	70	–	626 x 444 x 724	30	295	BD35F	–
DR 70 Inox Freezer Clean Touch	–	70	627 x 444 x 724	30	800	BD50F	** (-12°C)
DR 70 Inox Clean Touch Freezer - Ice Maker <sup>(3)</sup>	–	60	627 x 444 x 786 <sup>(4)</sup>	37	1391	TLESS.7FT.3	** (-12°C)
DR 70 Inox Clean Touch Freezer - Ice Maker <sup>(5)</sup>	–	60	627 x 444 x 786 <sup>(4)</sup>	37	1682	TLS4.5F	** (-12°C)
DR 85 Inox	68	17	495 x 625 x 545	33	396	BD35F	* (-6°C)
DR 100 Inox Fridge Clean Touch	100		546 x 501 x 778	34	252	BD35F	
DR 100 Inox Freezer Clean Touch		100	546 x 501 x 778	34	503	BD50F	** (-12°C)
DR 100 Inox Clean Touch Freezer - Ice Maker <sup>(3)</sup>		100	546 x 501 x 840	42		TLESS.7FT.3	** (-12°C)
DR 100 Inox Clean Touch Freezer - Ice Maker <sup>(5)</sup>		100	546 x 501 x 840	42		TLS4.5F	** (-12°C)
DR 105 Inox <sup>(6) (7)</sup>	105	–	515 x 515 x 575+170	33	480	BD35F	–
DR 130 Inox	114	16	545 x 745 x 545	35	436	BD35F	* (-6°C)
DR 160 Inox Light Fridge Only <sup>(7)</sup>	160	–	627 x 865 x 610	44	530	BD50F	–
DR 160 Inox Light Freezer Only <sup>(7)</sup>	–	160	627 x 865 x 610	46	1097	BD80F	** (-12°C)
DR 160 Inox Light Fridge Freezer <sup>(7)</sup>	90	70	627 x 865 x 610	45	635	BD80F	* (-6°C)
DR 190 Inox <sup>(7)</sup>	190	–	900 x 800 x 545	44	700	BD50F	–

(1) Depth 440+145 mm with remote compressor (2) Depth 600+145 mm with remote compressor - (3) Power supply 220 V AC – 50 Hz - (4) Depth 599+160 mm with remote compressor - (5) Power supply 115 V AC – 60 Hz - (6) This product is sold already with remote compressor - (7) Custom Panel versions are available on demand (for Drawer 160: fridge only DC, freezer only DC, fridge/freezer DC).

Power consumption Wh/24h in operation at 12 V with + 5°C in the refrigeration space, ambient temperature + 25°C according to the Standards ISO 15502:2005 and EN 153:2006. Please refer to the installation manual for further technical/installation details. Specification changes may be made without prior notice.

# DRAWER Mini

## Marine Refrigerator & Freezer

16 Silver, 30 Black, 30 Silver, 30 White




\* 240 without feet

### DRAWER 16 Silver

The smallest and lightest drawer unit available on the market, unique with its friendly user digital interface. It is provided with stainless steel rails and door in stainless steel, painted in silver colour. The outer feeling is the highly appreciated Elegance design, provided with the typical product line's features as the easy fix installation solution. Equipped with BD 1.4F Secop compressor, it requires minimum installation space. It can be used as a fridge or freezer (-6°C).

\*\* Depth only 440 when compressor is remote



Isotherm DRAWER 16 Silver	
Weight (Kg)	13
Gross volume (l)	16

ORDER NUMBER	DESCRIPTION
D016DSAAS12111AA	DRAWER FRIDGE SILVER 16/V




\* 250 without feet

### DRAWER 30 Black

The Drawer 30 Black version is a drawer refrigerator with a user-friendly digital interface, specified for internal applications. It is provided with steel rails and black painted steel door. The outer feeling is the highly appreciated Elegance design, provided with the typical product line's features as the easy fix installation solution. Equipped with BD 1.4F Secop compressor, it requires minimum installation space.

\*\* Depth only 600 when compressor is remote



Isotherm DRAWER 30 Black	
Weight (Kg)	18
Gross volume (l)	30

ORDER NUMBER	DESCRIPTION
D030DBAAB12111AA	DRAWER FRIDGE BLACK 30/V




\* 250 without feet

### DRAWER 30 Silver

The Drawer 30 Silver premium version is a drawer refrigerator with a user-friendly digital interface. It is provided with AISI 304 stainless steel rails and stainless steel door, painted in silver colour. The outer feeling is the highly appreciated Elegance design, provided with the typical product line's features as the easy fix installation solution. Equipped with BD 1.4F Secop compressor, it requires minimum installation space.

\*\* Depth only 600 when compressor is remote



Isotherm DRAWER 30 Silver	
Weight (Kg)	18
Gross volume (l)	30

ORDER NUMBER	DESCRIPTION
D030DSAAS12111AA	DRAWER FRIDGE SILVER 30/V

# DRAWER Mini, Inox

## Marine Refrigerator & Freezer

30 White, 42, 49,




\* 250 without feet

### DRAWER 30 White

The Drawer 30 White version is a drawer refrigerator with a user-friendly digital interface. It is provided with AISI 304 stainless steel rails and stainless steel door, painted in white colour. The outer feeling is the highly appreciated Elegance design, provided with the typical product line's features as the easy fix installation solution. Equipped with BD 1.4F Secop compressor, it requires minimum installation space.

\*\* Depth only 600 when compressor is remote




Isotherm DRAWER 30 White	
Weight (Kg)	18
Gross volume (l)	30

ORDER NUMBER	DESCRIPTION
D030DWAAW12111AA	DRAWER FRIDGE WHITE 30/V



### DRAWER 42 Inox Clean Touch

The Drawer 42 Inox Clean Touch is a drawer refrigerator solution with freezer compartment, characterized by compact external dimensions. The inox Clean Touch finishing in stainless steel AISI 304, will makes your life better and easier, with an outstanding look and feel and a long lasting clean effect. It will surprise you with its interior practicality, thanks to an easy to use thermostat with five integrated LED lights and a robust drawer mechanism. The BD Micro Secop compressor can be easily removed from cabinet's back up to 1 meter away, thus its standard 3 sides flush mounting flange grants the perfect on board integration.




Isotherm DRAWER 42 Inox Clean Touch	
Weight (Kg)	18
Gross volume (l)	42

ORDER NUMBER	DESCRIPTION
D042DNEIT11111AA	DRAWER FRIDGE INOX CLEAN-TOUCH 42(II)/V



### DRAWER 49 Inox Clean Touch

The Drawer 49 Inox Clean Touch is a space-saving drawer unit in stainless steel. The Inox Clean Touch feature (stainless steel AISI 304 which is specially treated to avoid fingerprints) will make your life easier, thanks to the perfect product fitting as well as a long-lasting clean effect. The interior is designed to suit international cans and food packs, with a robust drawer mechanism. It is provided with an easy to use electronic thermostat, with five LED light integrated. Completed with a large freezer compartment and a 3 side mounting flange. Available with the CUSTOM PANEL door option.



Isotherm DRAWER 49 Inox Clean Touch	
Weight (Kg)	18
Gross volume (l)	49

ORDER NUMBER	DESCRIPTION
D049DNEIT11111AA	DRAWER FRIDGE INOX CLEAN-TOUCH 49(II)/V
D049DNLCP11111AA	DRAWER FRIDGE CUSTOM 49(II)/VV

# DRAWER Inox


## Marine Refrigerator & Freezer

### 55 Frost-free, 65 Frost-free, 65 Frost-free Drink



#### DRAWER 55 Inox Frost-free Freezer

The DR 55 freezer is a 55 liters capacity stainless steel front opened drawer freezer. This model combines innovative stainless steel design with the most modern technology such as automatic defrost which allows having home comfort on board. The DR 55 F is equipped with an internal fan for temperature constant control and a sequence of 5 LED lights for blue internal light.




Isotherm DRAWER 55 Inox Frost-free Freezer	
Weight (Kg)	26
Gross volume (l)	55

ORDER NUMBER	DESCRIPTION
3055BH2C00000	FREEZER DRAWER INOX NO FROST 55/V



#### DRAWER 65 Inox Frost-free

The DR 65 Inox is a space-saving, front-opened drawer, providing a volume of 65 liters with bins and bottle racks. It combines the most modern technology with automatic defrost allowing home comfort on board. For constant temperature control, an internal fan is mounted. A sequence of 5 LED lights provides blue internal light. Ideal for a side by side installation with the DR 55 Inox freezer.




Isotherm DRAWER 65 Inox Frost-free	
Weight (Kg)	28
Gross volume (l)	65

ORDER NUMBER	DESCRIPTION
3065BG2C00000	FRIDGE DRAWER INOX NO FROST 65/V



#### DRAWER 65 Inox Frost Free Drink

The Drawer 65 Inox Frost Free Drink is an exclusive front-opened drawer solution designed to offer spacious on board storage for drinks and beverage. The Frost Free technology with its ventilated evaporator ensure perfect cold air circulation in the cabinet, keeping drinks always at the right temperature. It is equipped with a sequence of 5 blue LED lights with a 4 sides flush mounting flange not-installed in box included.



Isotherm DRAWER 65 Inox Frost-free Drink	
Weight (Kg)	28
Gross volume (l)	65

ORDER NUMBER	DESCRIPTION
3065BG2C00116	FRIDGE DRAWER INOX NO FROST 65/V - FRAME 3 SIDES AND LOWER SIDE IN BOX - DRINK VERSION

# DRAWER Inox Clean Touch


## Marine Refrigerator & Freezer

### 65 Clean Touch , 70 Clean Touch



#### DRAWER 65 Inox Clean Touch

The Drawer 65 Inox Clean Touch combines the well-known advantages of the premium Clean Touch stainless steel finishing to an innovative interior concept, made by bins, bottle racks and a large freezer compartment. Compact and performing, is fit likewise the Drawer 49 with the new BD 1.4F VSD by SECOP 12/24V Micro compressor, provided as well with an innovative, easy to use electronic thermostat. A 3 side mounting flange and the renewed CUSTOM PANEL door option makes it easy to install and integrate into customer's furniture.



Isotherm DRAWER 65 Inox Clean Touch	
Weight (Kg)	28
Gross volume (l)	65


ORDER NUMBER	DESCRIPTION
D065DNEIT11111AA	DRAWER FRIDGE INOX CLEAN-TOUCH 65(II)/V
D065DNLCP11111AA	DRAWER FRIDGE CUSTOM 65(II)/V



#### DRAWER 70 Inox Clean Touch

The DR70 Inox Clean Touch is the premium front-opened drawer solution with a door in stainless steel especially treated to avoid fingerprints. This new material combines a state of the art marine design with easy cleaning and maintenance of the refrigerator. It is provided with a robust drawer mechanism, 5 blue led lights and internal baskets, to provide great comfort in use. The 3 sides stainless steel flange allows an easy recess in furniture, as well as the remote compressor option facilitate the compressor location up to 1.1mt away from the cabinet. It is available in three different versions, as fridge (DC), freezer (DC) and freezer with Ice Maker integrated (AC). The three versions of DR70 are also available with CUSTOM PANEL option.

\* Depth only 610 mm when compressor is remote



Isotherm DRAWER 70 Inox Clean Touch	
Weight (Kg)	30
Gross volume (l)	70

ORDER NUMBER	DESCRIPTION
D070DNEIT12111AA	DRAWER FRIDGE INOX CLEAN-TOUCH 70/V
D070DNEIT13111AA	DRAWER FREEZER INOX CLEAN-TOUCH 70/V
D070DNEIT55112AA	DRAWER FREEZER WITH ICE-MAKER INTEGRATED 230/V INOX CLEAN-TOUCH 70/V
D070DNEIT65113AA	DRAWER FREEZER WITH ICE-MAKER INTEGRATED 115/V INOX CLEAN-TOUCH 70/V

# DRAWER Inox, Inox Clean Touch


## Marine Refrigerators & Freezers

85, 100



### DRAWER 85 Inox

The DR 85 Inox is a drawer refrigerator in stainless steel design providing a gross internal volume of 85L. The main drawer-door mechanism is the top quality Isotherm solution, capable to ensure safe and large storage for food and drinks. A bottle rack is provided on the main counter door. Two inner drawers are available to ensure the maximum usability as well as great storage, with the top one as freezer compartment (-6°C).



Isotherm DRAWER 85 Inox	
Weight (Kg)	33
Gross volume (l)	85


ORDER NUMBER	DESCRIPTION
D085DNEIA1111AA	DRAWER FRIDGE INOX 85/V



### Drawer 100 Inox Clean Touch

The Drawer 100 Inox Clean Touch is a large single door solution, that keeps the exclusive advantages of the anti-fingerprint stainless steel, combined with unbeaten practicality and comfort in use.

A robust drawer mechanism, 5 blue led lights and a dedicated inner basket system make it ideal once great comfort is desired. The standard 3 sides fixing flange in stainless steel and its remote compressor options grant perfect on board integration. It is available in three different versions, as fridge (DC), freezer (DC) and freezer with Ice Maker integrated (AC). All versions are available with the CUSTOM PANEL door option.



Isotherm DRAWER 100 Inox Clean Touch	
Weight (Kg)	34
Gross volume (l)	100

ORDER NUMBER	DESCRIPTION
D100DNEIT12111AA	DRAWER FRIDGE INOX CLEAN-TOUCH 100/V
D100DNLCP12111AA	DRAWER FRIDGE CUSTOM 100/V
D100DNEIT13111AA	DRAWER FREEZER INOX CLEAN-TOUCH 100/V
D100DNLCP13111AA	DRAWER FREEZER CUSTOM 100/V

# DRAWER Inox

## Marine Refrigerators & Freezers


105, 130



### DRAWER 105 Inox

The DR 105 Inox drawer fridge gives opportunities for installations where a normal refrigerator would not fit. It can be installed as the main galley fridge, as a cockpit bar or even on the fly-bridge. The front panel is available in stainless steel or as a raw foamed drawer front, providing the possibility of mounting individual wooden front panels to fit the boat's interior. The remote compressor option facilitate the compressor location up to 1.5 mt away from the cabinet.

\* DR105 sold already with remote compressor




Isotherm DRAWER 105 Inox	
Weight (Kg)	33
Gross volume (l)	105

ORDER NUMBER	DESCRIPTION
3105BA2C00006	DRAWER FRIDGE INOX FRONT INOX 105/V - REMOTE UNIT 2m X-COUPPLINGS



### DRAWER 130 Inox

The DR 130 Inox is a drawer refrigerator in stainless steel design with two separate drawers providing practical adjustable interior equipment. It is equipped with a fan-cooled compressor mounted on the rear side and delivered with a three side mounting frame for flush mounting.



Isotherm DRAWER 130 Inox	
Weight (Kg)	44
Gross volume (l)	130

ORDER NUMBER	DESCRIPTION
D130DNEIA11111AA	DRAWER FRIDGE INOX 130/V

# DRAWER Inox


## Marine Refrigerators & Freezers

### 160 Light, 190



#### DRAWER 160 Inox Light

The DR 160 Inox Light is an evolution of the successful DR160 Inox Combo. This unit works on 12/24 V and is available in three versions: both drawers as fridges, both drawers as freezers or one drawer as a fridge and one drawer as a freezer. Internal light on fridge and fridge/freezer versions. Internal divider kit available as option. Isotherm Power Pack ready for AC/DC application.




Isotherm DRAWER 160 Inox Light	
Weight (Kg)	45
Gross volume (l)	160

ORDER NUMBER	DESCRIPTION
3160BA1C00000	FRIDGE DRAWER INOX 160/V
3160BB1CR0000	FRIDGE AND FREEZER DRAWER INOX 160/V
3160BC1C00000	FREEZER DRAWER INOX 160/V



#### DRAWER 190 Inox

The DR 190 Inox is a drawer refrigerator in stainless steel design with two separate drawers providing practical adjustable interior equipment. It is equipped with a fan-cooled compressor mounted on the rear side and delivered with a three side mounting frame for flush mounting.



Isotherm DRAWER 190 Inox	
Weight (Kg)	44
Gross volume (l)	190

ORDER NUMBER	DESCRIPTION
3190BA2C00000	FRIDGE DRAWER INOX 190/V



## For daily use and in extreme conditions

No matter where you decide to cruise, Cooling Boxes offer the right cooling solution for your boat or yacht. Travel Boxes are extremely performing and especially convenient for daily use thanks to their light and compact design.

# Cooling Boxes

<b>Travel Boxes</b>	<b>46</b>
TB 13	47
TB 18	47
<hr/>	
<b>Built-In Boxes</b>	<b>48</b>
BI 16	49
BI 29 Dual	49
BI 30	50
BI 36	50
BI 40	51
BI 41 Dual	51
BI 53 F	52
BI 75	52
BI 92 Dual	53
BI 172 Dual	53



# Cooling Boxes

## Travel Boxes

### Your reliable partner for daily use and / or in extreme conditions!

No matter where you decide to cruise, Isotherm Travel Boxes offer the right cooling solution for your boat or yacht. The travel box TB 13 and TB 18, thanks to the new BD 1.4F compressor, are very compact like thermoelectric fridges but extremely performing.

- Very light and compact design for outdoor conditions
- Reliability: Secop compressor
- Easy to carry, adjustable shoulder strap available for TB 18
- 3 years full warranty and 5 years limited warranty on compressor's mechanical parts (labour excluded)



Optional fixing plate available for TB13

#### Compact and performing: TB 13

- Operating temperature range from +10°C to -18°C
- Easy to use thermostat knob
- DC 12/24V power cable for cigarette lighter plug
- Very light and compact design
- Micro compressor technology



#### Inimitable travel mate: TB 18

- Very light and compact design, easy to carry 8.6 kg
- Equipped with NEW BD 1.4F compressor, the smallest and lightest DC unit on the market
- Internal LED light
- Electronic thermostat with easy to use display
- Adjustable shoulder strap

### Product Overview: Travel Boxes

Type	Gross Volume (l)	Dimensions W x H x D (mm)	Weight (kg)	Power consumption (Wh/24h)	Secop compressor type
TB 13 12/24 V DC	13	225 x 360 x 535	8,5	150	BD1.4F-FSD
TB 18 12/24 V DC	18	235 x 405 x 565	9	150	BD1.4F-VSD

Power consumption Wh/24h in operation at 12 V with + 5°C in the refrigeration space, ambient temperature + 25°C according to the Standards ISO 15502:2005 and EN 153:2006.  
Please refer to the installation manual for further technical/installation details.  
Specification changes may be made without prior notice.


# Cooling Boxes

## Travel Boxes

13, 18



**TB 13**




### Isotherm Travel Box 13

Gross Volume (l)	13
Weight (kg)	8,5
Internal dimensions	290 x 145 x 295

ORDER NUMBER	DESCRIPTION
2013BG1000001	FRIDGE OR FREEZER TRAVEL BOX 13/V



**TB 18**



### Isotherm Travel Box 18

Gross Volume (l)	18
Weight (kg)	9
Internal dimensions	260 x 170 x 290

ORDER NUMBER	DESCRIPTION
2018BD1000000	FRIDGE OR FREEZER TRAVEL BOX 18/V

# Cooling Boxes

## Built-In Boxes

Great flexibility of installation, optimum use of on-board space.




- 12/24 V Secop compressor
- Plastic or stainless steel inside lining to avoid any damage even after contact with salt water
- Roller slides available for BI 29 as an option
- Evaporator integrated in the foam allows easy cleaning(except BI 40)
- Top can be customized

Built-in cooling boxes allow an optimized use of space on board thanks to the top-loading access to the interior. They are extremely flexible in size and design.

### The advantages of a built-in cooling box:

- Easy access to food and drinks from the top
- Better installation options
- Extremely space saving
- Customizing options for the lid allow for perfectly adapted design

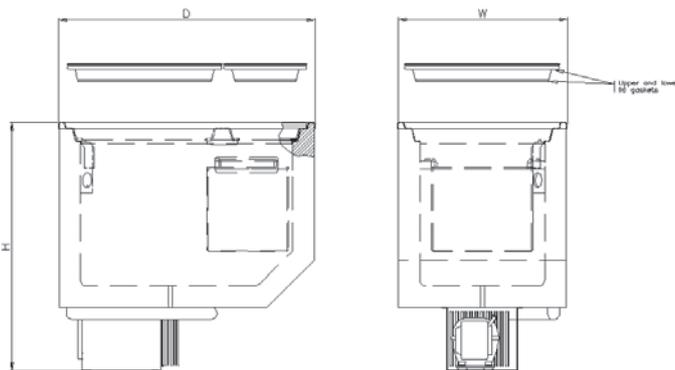

The CRUISE 40 Cubic can also be installed as a built-in top opening cooler box.

### Product Overview: Built-In Cooling Boxes

Type	Gross volume (l)		Dimensions W x H x D (mm)	Water cooled option	Weight (kg)	Power consumption (Wh/24h)	Secop compressor type	Freezer compartment specifications
	Fridge	Freezer						
BI 16	16		384 x 557 <sup>(1)</sup> x 240		12	155	BD1.4F-FSD	-
BI 29 Dual <sup>(2)</sup>	29		670 <sup>(3)</sup> x 330 <sup>(4)</sup> x 342	X	18	250	BD35F	* * (-12)
BI 30	30		448 x 724 <sup>(5)</sup> x 251		18	254	BD1.4F-FSD	-
BI 36	36		438 x 685 <sup>(6)</sup> x 240		18	-	BD35F	-
BI 40	40		560 <sup>(7)</sup> x 400 <sup>(8)</sup> x 395	X	15	270	BD35F	-
BI 41 Dual <sup>(2)</sup>	41		496 x 610 <sup>(9)</sup> x 340	X	19	270	BD35F	* (-6)
BI 53 F		53	645 x 630 <sup>(11)</sup> x 425	X	26	260	BD50F	* * * (-18)
BI 75	75		645 x 630 <sup>(11)</sup> x 425	X	26	340	BD35F	-
BI 92 Dual <sup>(2)</sup>	92		801 x 615 <sup>(12)</sup> x 480	X	28	360	BD50F	* * (-18)
BI 172 Dual	172	38	980 x 840 x 493	X	45	357	BD50F	-
	130					603		* * (-12)

(1) Height 437+160 mm with remote compressor - (2) The built-in box operates as a fridge or freezer - (3) Depth 540+170 mm with remote compressor - (4) add 40 mm for door depth - (5) Height 604+140 mm with remote compressor - (6) add 30 mm for door depth - (7) Depth 435+170 mm with remote compressor - (8) add 25 mm for door depth - (9) add 15 mm for door depth - (10) Depth 494+160 mm with remote compressor - (11) Depth 510+160 mm with remote compressor - (12) Depth 42+160 mm with remote compressor.  
 Power consumption in operation on 12 Volt with +5 °C in the refrigeration space, ambient temperature +25 °C according to the Standards ISO 15502:2005 and EN 153:2006  
 Please refer to the installation manual for further technical / installation details. Specification changes may be made without prior notice.

# Cooling Boxes

## Built-In Boxes


### BI 16, BI 29 Dual



#### BI 16

The BI 16 is a refrigerator box equipped with the space saving Secop BD Micro compressor solution. The upper lid with inner recess allows big bottles storage. Temperature range 0°C to +10°C. It combines great usability to high development standards, thanks to its easy to use digital display and to a splash proof IPX5 front protection.

\* Depth only 437 mm when compressor is remote



Isotherm Built-In 16	
Weight (Kg)	12
Gross volume (l)	16


ORDER NUMBER	DESCRIPTION
B016TNAAB12111AA	FRIDGE BUILT-IN 16/V



#### BI 29 Dual

The BI 29 is a refrigerator or freezer box with stainless steel inner lining and plastic bottom section. It offers a range of +10°C to -12°C. Equipped with roller slides (optional) the box can be used as a drawer. The compressor can be removed up to 1.1 meter away.

\* 40 mm door's thickness not included  
 \*\* Depth only 540 mm when compressor is remote



Isotherm Built-In 29	
Weight (Kg)	18
Gross volume (l)	29

ORDER NUMBER	DESCRIPTION
3029BB2D00000	FRIDGE BUILT-IN 29/V

# Cooling Boxes

## Built-In Boxes


### BI 30, BI 36



#### BI 30

The BI 30 is a top loading refrigerator box equipped with BD 1.4F FSD by SECOP 12/24V Micro compressor. It is provided with easy to use digital display with "splash proof" IPX5 front protection, internal basket, easy-fix system and structural bottom compressor's casing. Temperature range from 0°C to +10°C. It combines great usability to high development standards.

\* Height only 604 mm when compressor is remote



Isotherm Built-In 30	
Weight (Kg)	18
Gross volume (l)	30


ORDER NUMBER	DESCRIPTION
B030TNAAB12111AA	FRIDGE BUILT-IN 30/V



#### BI 36

The BI 36 is a top loading refrigerator box equipped with Secop BD35F 12/24V DC compressor. The product is meant to be integrated into customer's furniture and customized in finishing via the upper lid, granting safe hinging according to product application type and layout specifications. Temperature range from 0°C to +10°C. It combines great usability to high development standards.

\* 35 mm door's thickness not included



Isotherm Built-In 36	
Weight (Kg)	18
Gross volume (l)	36

ORDER NUMBER	DESCRIPTION
B036TNACP12111AA	FRIDGE BUILT-IN 36/V

# Cooling Boxes

## Built-In Boxes


### BI 40, BI 41 Dual



#### BI 40

The BI 40 is a built-in refrigerator box. It is equipped with an L-shaped evaporator. The fan-cooled compressor is mounted on the side and can be removed up to 1.2 meter away. Other compressor options as SP or Magnum are also available.

- \* 25 mm door's thickness not included
- \*\* Depth only 435 mm when compressor is remote



Isotherm Built-In 40	
Weight (Kg)	15
Gross volume (l)	40


ORDER NUMBER	DESCRIPTION
3040BA2A00000	FRIDGE BUILT-IN 40/V



#### BI 41 Dual

The BI 41 is a refrigerator or freezer box with stainless steel inner lining, plastic bottom section and a wire basket. It offers a range of +10°C to -10°C. The fan-cooled compressor is mounted on the bottom, or easily repositioned up to 1.3 meter away. Other compressor options as SP or Magnum are also available.

- \* 15 mm door's thickness not included
- Height only 494 mm when compressor is remote



Isotherm Built-In 41	
Weight (Kg)	19
Gross volume (l)	41

ORDER NUMBER	DESCRIPTION
3041BA2A00000	FRIDGE OR FREEZER BUILT-IN 41/V

# Cooling Boxes

## Built-In Boxes


### BI 53 F, BI 75



#### BI 53 F

The BI 53 F is a built-in freezer box with stainless steel inner lining, plastic bottom section and a wire basket. It offers a range of 0°C to -20°C and is equipped with interior light. Its fan-cooled compressor unit is mounted below but easily repositioned up to 1.5 meters away. Other compressor options as SP or Magnum are also available.

\* Height only 510 mm when compressor is remote



Isotherm Built-In 53 F	
Weight (Kg)	26
Gross volume (l)	53


ORDER NUMBER	DESCRIPTION
3053BC2B00000	FREEZER BUILT-IN INOX 53/V



#### BI 75

The BI 75 is a built-in fridge box with stainless steel inner lining, plastic bottom section and one wire basket. It is equipped with interior light. Its fan-cooled compressor unit is mounted below but easily repositioned up to 1.5 meter away. Other compressor options as SP or Magnum are also available.

\* Height only 510 mm when compressor is remote



Isotherm Built-In 75	
Weight (Kg)	26
Gross volume (l)	75

ORDER NUMBER	DESCRIPTION
3075BB2B00000	FRIDGE BUILT-IN INOX 53/V

# Cooling Boxes

## Built-In Boxes


### BI 92 Dual, BI 172 Dual



#### BI 92 Dual

The BI 92 is a built-in fridge or freezer box with stainless steel inner lining, plastic bottom section and three wire baskets. It offers a range of +10°C to -20°C and is equipped with interior light. Its fan-cooled compressor unit is mounted below but easily repositioned up to 1.5 meter away. Other compressor options as SP or Magnum are also available.

\* Height only 492 mm when compressor is remote




Isotherm Built-In 92	
Weight (Kg)	28
Gross volume (l)	92

ORDER NUMBER	DESCRIPTION
3092BB2B00000	FRIDGE OR FREEZER BUILT-IN INOX DUAL 92/V



#### BI 172 Dual

Built-In 172 DUAL is a combined cooling solution 130 liter fridge & 38 liter freezer or 172 liter fridge only, capable to work on a multiple use base. Top loading openings for fridge and freezer compartments and front loading opening for fridge compartment are possible. The innovative concept at the base of the BI172 is modularity both in use and application. It is the end user deciding the product functions, according to his needs. Isotherm Power Pack ready for AC/DC application.



Isotherm Built-In 172	
Weight (Kg)	45
Gross volume (l)	172

ORDER NUMBER	DESCRIPTION
B172YNAAA14111AA	FRIDGE/FREEZER BI172/V DUAL 12/24 V

# Master Data Table

## Cruise, Drawer & Built-in

### Product Overview

MODEL	FUNCTION	Gross Volume fridge (l)	Gross Volume freezer (l)	Weight (Kg)	Width (W) (mm) (1) (2) (3) (A)	Height (H) (mm) (1) (2) (3) (A)
CR 36	FRIDGE	36	-	16	440	250
CR 36 INOX	FRIDGE	36	-	17	455	255
CR 40 CUBIC	FRIDGE OR FREEZER	40		18	420	435
CR 42	FRIDGE + FREEZER COMPARTMENT	37	5	14	380	525
CR 42 EL	FRIDGE + FREEZER COMPARTMENT	37	5	14	380	525
CR 42 INOX CLEAN TOUCH	FRIDGE + FREEZER COMPARTMENT	37	5	15	400	525
CR 49	FRIDGE + FREEZER COMPARTMENT	44	5	16	380	525
CR 49 EL	FRIDGE + FREEZER COMPARTMENT	44	5	17	380	525
CR 49 INOX CLEAN TOUCH	FRIDGE + FREEZER COMPARTMENT	44	5	18	400	525
CR 63 F	FREEZER	-	63	23	475	620
CR 63 F INOX	FREEZER	-	63	25	494	623
CR 65	FRIDGE + FREEZER COMPARTMENT	60	5	19	450	530
CR 65 EL	FRIDGE + FREEZER COMPARTMENT	60	5	18	450	530
CR 65 INOX CLEAN TOUCH	FRIDGE + FREEZER COMPARTMENT	60	5	21	470	530
CR 65 F	FREEZER	-	65	22	525	610
CR 65 F INOX	FREEZER	-	65	23	544	610
CR 85	FRIDGE + FREEZER COMPARTMENT	77	8	22	475	627
CR 85 EL	FRIDGE + FREEZER COMPARTMENT	77	8	22	475	627
CR 85 INOX CLEAN TOUCH	FRIDGE + FREEZER COMPARTMENT	77	8	24	495	627
CR 86	FRIDGE + FREEZER COMPARTMENT	76	10	24	380	850
CR 90 BIG	FRIDGE & FREEZER	70	20	24	476	850
CR 90 F	FREEZER	-	90	28	525	750
CR 90 F INOX CLEAN TOUCH	FREEZER	-	90	29	545	750
CR 100	FRIDGE + FREEZER COMPARTMENT	94	6	26	486	745
CR 130	FRIDGE + FREEZER COMPARTMENT	122	8	23	525	750
CR 130 EL	FRIDGE + FREEZER COMPARTMENT	122	8	26	525	750
CR 130 INOX CLEAN TOUCH	FRIDGE + FREEZER COMPARTMENT	122	8	27	545	750
CR 130 INOX CLEAN TOUCH SPECIALE	FRIDGE + FREEZER COMPARTMENT	122	8	29	545	794
CR 130 DRINK	FRIDGE	130	-	27	527	750
CR 130 DRINK INOX	FRIDGE	130	-	32	544	750
CR 160 DRINK INOX	FRIDGE	160	-	40	626	870
CR 195 COMBI	FRIDGE & FREEZER	130	65	54	551	1347
CR 195 COMBI INOX	FRIDGE & FREEZER	130	65	54	544	1347
CR 200	FRIDGE & FREEZER	150	50	53	731	880
CR 200 INOX	FRIDGE & FREEZER	150	50	53	731	880
CR 205 WHITE	FRIDGE + FREEZER COMPARTMENT	175	30	36	540	1205
CR 220 COMBI INOX	FRIDGE & FREEZER	130	90	61	544	1545
CR 223 WHITE	FRIDGE & FREEZER	168	55	40	540	1441
CR 225 SILVER	FRIDGE & FREEZER	180	45	36	547	1444
CR 260 COMBI INOX	FRIDGE + FREEZER COMPARTMENT	244	16	64	544	1545
CR 280 SILVER	FRIDGE & FREEZER	235	45	41	547	1700
CR 285 WHITE	FRIDGE & FREEZER	205	80	53	540	1790
CR 320 COMBI INOX	FRIDGE	320	-	85	628	1790
CR 320 COMBI INOX	FRIDGE & FREEZER	250	70	85	628	1790
CR 320 COMBI INOX	FRIDGE & FREEZER	160	160	85	628	1790
FL 115 EL	FRIDGE + FREEZER COMPARTMENT	83	32	30	525	797

Depth (D) (mm) (1) (2) (3) (A)	Cut-Out (mm)	Frames (B)	Freezer rating (max temp. °C)	Climatic class	Compressor type	Power supply (V) (C)	Power consumption (Wh/24h) (4) (5) (6)
685 <sup>(1)</sup>	442:252	3 side FM SS <sup>(VII)</sup>	-	ST	BD35F	12/24V	300
715	457:257	4 side FM SS <sup>(VII)</sup>	-	ST	BD35F	12/24V	300
585 <sup>(1)</sup>	422:437	NO	* * (-12)	ST	BD35F	12/24V	186
455 <sup>(1)</sup>	382:527	OPT	* (-6)	ST	BD1.4F-VSD	12/24V	300
455 <sup>(1)</sup>	382:527	OPT	* (-6)	ST	BD1.4F-VSD	12/24V	285
500	402:527	3 side FM SS <sup>(VII)</sup>	* (-6)	ST	BD1.4F-VSD	12/24V	285
452 <sup>(1)</sup>	382:527	OPT	* (-6)	ST	BD35F	12/24V	278
452 <sup>(1)</sup>	382:527	OPT	* (-6)	ST	BD35F	12/24V	265
500	402:527	3 side FM SS <sup>(VII)</sup>	* (-6)	ST	BD35F	12/24V	265
513 <sup>(1)</sup>	477:622	OPT	* * * (-18)	ST	BD35F	12/24V	440
552	496:625	3 side FM SS* <sup>(VII)</sup>	* * * (-18)	ST	BD35F	12/24V	440
473 <sup>(1)</sup>	452:532	OPT	* (-6)	ST	BD35F	12/24V	288
473 <sup>(1)</sup>	452:532	OPT	* (-6)	ST	BD35F	12/24V	275
520	472:532	3 side FM SS <sup>(VII)</sup>	* (-6)	ST	BD35F	12/24V	275
540 <sup>(1)</sup>	527:612	NO	* * * (-18)	ST	BD35F	12/24V	458
580	546:612	3 side FM SS <sup>(VII)</sup>	* * * (-18)	ST	BD35F	12/24V	458
505 <sup>(1)</sup>	477:629	OPT	* (-6)	ST	BD35F	12/24V	386
505 <sup>(1)</sup>	477:629	OPT	* (-6)	ST	BD35F	12/24V	368
550	497:629	3 side FM SS <sup>(VII)</sup>	* (-6)	ST	BD35F	12/24V	368
495 <sup>(1)</sup>	382:852	OPT	* (-6)	ST	BD1.4F-VSD	12/24V	499
430 <sup>(1)</sup>	478:852	NO	* * * (-18)	ST	BD35F	12/24V	520
515 <sup>(1)</sup>	527:752	OPT	* * (-12)	ST	BD35F	12/24V	670
565	547:752	3 side FM SS <sup>(VII)</sup>	* * (-12)	ST	BD35F	12/24V	626
455 <sup>(1)</sup>	488:747	OPT	* (-6)	ST	BD35F	12/24V	400
510 <sup>(1)</sup>	527:752	OPT	* (-6)	ST	BD35F	12/24V	438
510 <sup>(1)</sup>	527:752	OPT	* (-6)	ST	BD35F	12/24V	418
555	550:750	3 side FM SS <sup>(X)</sup>	* (-6)	ST	BD35F	12/24V	418
585	552:796	3 side FM SS <sup>(X)</sup>	* (-6)	ST	BD35F	12/24V	418
520 <sup>(1)</sup>	529:752	OPT	-	ST	BD35F	12/24V	400
560	546:752	3 side FM SS <sup>(VII)</sup>	-	ST	BD35F	12/24V	400
610	628:872	3 side FM SS <sup>(VII)</sup>	-	ST	BD50F	12/24V	512
565	553:1349	3 side FM <sup>(IX)</sup>	* * * (-18)	ST	2 x BD35F	12/24V	840
565	546:1349	3 side FM SS <sup>(VII)</sup>	* * * (-18)	ST	2 x BD35F	12/24V	840
620	732:882	3 side FM SS <sup>(VII)</sup>	* * (-12)	ST	BD50F	12/24V	874
620	732:882	3 side FM SS <sup>(VII)</sup>	* * (-12)	ST	BD50F	12/24V	874
506 <sup>(1)</sup>	542:1207	NO	* * * (-18)	ST	BD50F	12/24V	
560	546:1547	3 side FM SS <sup>(VII)</sup>	* * (-12)	ST	2 x BD35F	12/24V	1070
506 <sup>(1)</sup>	502:1443	NO	* * * (-18)	ST	BD50F	12/24V	
486 <sup>(IV)</sup>	549:1446	NO	* * * (-18)	ST	BD50F	12/24V	630
560	546:1547	3 side FM SS <sup>(VII)</sup>	* (-6)	ST	2 x BD35F	12/24V	836
486 <sup>(IV)</sup>	549:1702	NO	* * * (-18)	ST	BD50F	12/24V	680
506 <sup>(1)</sup>	542:1792	NO	* * * (-18)	ST	BD50F	12/24V	
610	630:1792	3 side FM SS <sup>(VII)</sup>	-	ST	2 x BD50F	12/24V	1042
610	630:1792	3 side FM SS <sup>(VII)</sup>	* (-6)	ST	BD50F + BD80F	12/24V	1147
610	630:1792	3 side FM SS <sup>(VII)</sup>	* * (-12)	ST	BD50F + BD80F	12/24V	1609
495 <sup>(1)</sup>	527:799	NO	* (-6)	ST	BD35F	12/24V	257

MODEL	FUNCTION	Gross Volume fridge (l)	Gross Volume freezer (l)	Weight (Kg)	Width (W) (mm)			Height (H) (mm)		
					(1)	(2)	(3) (A)	(1)	(2)	(3) (A)
DR 16	FRIDGE OR FREEZER	16		13	380			250		
DR 30	FRIDGE	30	-	18	440			260		
DR 42 INOX CLEAN TOUCH	FRIDGE + FREEZER COMPARTMENT	34	8	18	399			519		
DR 49 INOX CLEAN TOUCH	FRIDGE + FREEZER COMPARTMENT	41	8	18	399			519		
DR 49 CUSTOM (der. INOX CLEAN TOUCH)	FRIDGE + FREEZER COMPARTMENT	41	8	16	379			519		
DR 55 FROST FREE INOX	FREEZER	-	55	26	469			525		
DR 55 FROST FREE CUSTOM	FREEZER	-	55	26	457			525		
DR 65 INOX CLEAN TOUCH	FRIDGE + FREEZER COMPARTMENT	54	11	21	470			525		
DR 65 CUSTOM (der. INOX CLEAN TOUCH)	FRIDGE + FREEZER COMPARTMENT	54	11	19	452			525		
DR 65 FROST FREE INOX	FRIDGE	65	-	28	469			525		
DR 65 FROST FREE CUSTOM	FRIDGE	65	-	28	457			525		
DR 70 INOX CLEAN TOUCH	FRIDGE	70	-	30	626			444		
DR 70 CUSTOM	FRIDGE	70	-	30	611			444		
DR 70 INOX CLEAN TOUCH	FREEZER	-	70	30	627			444		
DR 70 CUSTOM	FREEZER	-	70	30	611			444		
DR 70 INOX CLEAN TOUCH ver. 230V 50Hz	FREEZER + ICEMAKER	-	60	37	627			444		
DR 70 INOX CLEAN TOUCH ver. 115V 60Hz	FREEZER + ICEMAKER	-	60	37	627			444		
DR 70 CUSTOM ver. 230V 50Hz	FREEZER + ICEMAKER	-	60	37	611			444		
DR 70 CUSTOM ver. 115V 60Hz	FREEZER + ICEMAKER	-	60	37	611			444		
DR 85 INOX	FRIDGE + FREEZER COMPARTMENT	68	17	33	495			625		
DR 100 INOX CLEAN TOUCH	FRIDGE	100	-	34	546			501		
DR 100 CUSTOM	FRIDGE	100	-	31	529			501		
DR 100 INOX CLEAN TOUCH	FREEZER	-	100	34	546			501		
DR 100 CUSTOM	FREEZER	-	100	35	529			501		
DR 100 INOX CLEAN TOUCH ver. 230V 50Hz	FREEZER + ICEMAKER	-	100	42	546			501		
DR 100 INOX CLEAN TOUCH ver. 115V 60Hz	FREEZER + ICEMAKER	-	100	42	546			501		
DR 100 CUSTOM ver. 230V 50Hz	FREEZER + ICEMAKER	-	100	42	529			501		
DR 100 CUSTOM ver. 115V 60Hz	FREEZER + ICEMAKER	-	100	42	529			501		
DR 105 INOX	FRIDGE	105	-	33	515			515		
DR 130 INOX	FRIDGE + FREEZER COMPARTMENT	114	16	35	545			745		
DR 160 INOX	FRIDGE	160	-	44	627			865		
DR 160 CUSTOM	FRIDGE	160	-	44	613			868		
DR 160 INOX	FREEZER	-	160	46	627			865		
DR 160 CUSTOM	FREEZER	-	160	46	613			868		
DR 160 INOX	FRIDGE & FREEZER	90	70	45	627			865		
DR 160 CUSTOM	FRIDGE & FREEZER	90	70	45	613			868		
DR 190 INOX	FRIDGE	190	-	44	900			800		
DR 190 CUSTOM	FRIDGE	190	-	44	898			798		
BI 16	FRIDGE	16	-	12	384			557		
BI 29 DUAL	FRIDGE OR FREEZER	29		18	670			330 <sup>(I)</sup>		
BI 30	FRIDGE	30	-	18	449			724		
BI 36	FRIDGE	36	-	18	438			685 <sup>(IV)</sup>		
BI 40	FRIDGE	40	-	15	560			400 <sup>(VI)</sup>		
BI 41 DUAL	FRIDGE OR FREEZER	41		19	496			610 <sup>(VI)</sup>		
BI 53 F	FREEZER	-	53	26	645			630		
BI 75	FRIDGE	75	-	26	645			630		
BI 92 DUAL	FRIDGE OR FREEZER	92		28	801			615		
BI 172 DUAL	FRIDGE & FREEZER	130 (172 if only fridge)	38	45	980			840		

**A. Door dimension to be added**

- (I) add 40mm for door depth
- (II) add 50mm for door depth
- (III) add 35mm for door depth
- (IV) add 70mm for door depth
- (V) add 25mm for door dimension
- (VI) add 15mm for door dimension

**B. Width of frames**

- (VII) 20mm
- (VIII) 30mm.
- (IX) 38 sides width and 28 top height
- (X) 20 mm sides and 50 mm top height

**c. Isotherm Power Pack available for AC/DC application**

Depth (D) (mm) (1) (2) (3) (A)	Cut-Out (mm)	Frames (B)	Freezer rating (max temp. °C)	Climatic class	Compressor type	Power supply (V) (C)	Power consumption (Wh/24h) (4) (5) (6)
540	382:252	OPT	* (-6)	ST	BD1.4F-FSD	12/24V	252
700	442:262	OPT	-	T	BD1.4F-FSD	12/24V	244
511	401:521	3 side FM SS <sup>(V10)</sup>	54	ST	BD1.4F-VSD	12/24V	333
497	401:521	3 side FM SS <sup>(V10)</sup>	* (-6)	ST	BD1.4F-VSD	12/24V	305
494	381:521	NO	* (-6)	ST	BD1.4F-VSD	12/24V	305
555	471:527	3 side FM SS <sup>(V10)</sup>	** (-12)	N	BD35F	12/24V	741
560	459:527	NO	** (-12)	N	BD35F	12/24V	741
520	474:529	3 side FM SS <sup>(V10)</sup>	* (-6)	ST	BD1.4F-VSD	12/24V	324
525	456:529	NO	* (-6)	ST	BD1.4F-VSD	12/24V	324
555	471:527	3 side FM SS <sup>(V10)</sup>	-	ST	BD35F	12/24V	310
560	459:527	NO	-	ST	BD35F	12/24V	310
724	631:448	3 side FM SS <sup>(V10)</sup>	-	T	BD35F	12/24V	295
726	615:448	NO	-	T	BD35F	12/24V	295
724	631:448	3 side FM SS <sup>(V10)</sup>	** (-12)	T	BD50F	12/24V	800
726	615:448	NO	* (-12)	T	BD50F	12/24V	800
786	631:448	3 side FM SS <sup>(V10)</sup>	* (-12)	T	TLES5.7FT.3	230V	1391
786	631:448	3 side FM SS <sup>(V10)</sup>	** (-12)	T	TLS4.5F	115V	1682
788	615:448	NO	** (-12)	T	TLES5.7FT.3	230V	1391
788	615:448	NO	** (-12)	T	TLS4.5F	115V	1682
545	500:630	3 side FM SS <sup>(V10)</sup>	* (-6)	ST	BD35F	12/24V	396
778	550:505	3 side FM SS*	-	T	BD35F	12/24V	252
779	533:505	3 side FM SS <sup>(V10)</sup>	-	T	BD35F	12/24V	252
778	550:505	3 side FM SS <sup>(V10)</sup>	** (-12)	T	BD50F	12/24V	503
779	533:505	3 side FM SS <sup>(V10)</sup>	** (-12)	T	BD50F	12/24V	503
840	550:505	3 side FM SS <sup>(V10)</sup>	** (-12)	T	TLES5.7FT.3	230V	
840	550:505	3 side FM SS <sup>(V10)</sup>	** (-12)	T	TLS4.5F	115V	
841	533:505	3 side FM SS <sup>(V10)</sup>	** (-12)	T	TLES5.7FT.3	230V	
841	533:505	3 side FM SS <sup>(V10)</sup>	** (-12)	T	TLS4.5F	115V	
575+170	519:517	NO	-	ST	BD35F	12/24V	480
545	550:750	3 side FM SS <sup>(V10)</sup>	* (-6)	ST	BD35F	12/24V	436
610	632:870	3 side FM SS <sup>(V10)</sup>	-	ST	BD50F	12/24V	530
622	617:872	NO	-	ST	BD50F	12/24V	530
610	632:870	3 side FM SS <sup>(V10)</sup>	** (-12)	ST	BD80F	12/24V	1097
622	617:872	NO	** (-12)	ST	BD80F	12/24V	1097
610	632:870	3 side FM SS <sup>(V10)</sup>	* (-6)	ST	BD80F	12/24V	635
622	617:872	NO	* (-6)	ST	BD80F	12/24V	635
545	905:805	3 side FM SS <sup>(V10)</sup>	-	ST	BD50F	12/24V	700
551	902:802	NO	-	ST	BD50F	12/24V	700
240	384:242	NO	-	ST	BD1.4F-FSD	12/24V	155
342	346:509	NO	** (-12)	ST	BD35F	12/24V	250
251	453:255	NO	-	T	BD1.4F-FSD	12/24V	254
240	442:244	NO	-	ST	BD35F	12/24V	260
395	405:405	NO	-	ST	BD35F	12/24V	270
340	500:344	NO	* (-6)	ST	BD35F	12/24V	270
425	649:429	NO	*** (-18)	ST	BD50F	12/24V	260
425	649:429	NO	-	ST	BD35F	12/24V	340
480	805:484	NO	*** (-18)	ST	BD50F	12/24V	360
493	984:497	NO	** (-12)	ST	BD50F	12/24V	603 (357 if only fridge)

**NOTE:**

- 1 Refrigerators manufacturing tolerances -2/+4 mm
- 2 Dimensions include refrigerator's feet
- 3 According to EN 603335 - 1 regulation, the inside walls of the furniture housing the refrigerator must be distant from the fridge by 20 mm per side and 50 mm from the top. Please refer to the installation manual for further technical / installation details

4 Power consumption Wh/24h in operation on 12 V and ambient temperature +25°C according to the Standards ISO 15502:2005 and EN 153:2006

5 Most of Isotherm fridges can also benefit from a retrofitted Isotherm Smart Energy Control or Intelligent Temperature Control kit. On some models it reduces battery consumption by up to 50 %

6 Product sold already with remote compressor



## **Isotherm Exclusive Cooling Technology**

Energy is a precious resource on board of any boat or yacht. Indel Webasto Marine continuously improves its energy management solutions to provide better efficiency and clever power saving for customers.

# Cooling Technology

<b>Isotherm Intelligent Temperature Control</b>	<b>60</b>
<hr/>	
<b>Isotherm Smart Energy Control</b>	<b>61</b>
<hr/>	
<b>Frost-free</b>	<b>62</b>
<hr/>	

# Cooling Technology

## Isotherm Intelligent Temperature Control

### Isotherm ITC Digital display



The ITC Digital Display clearly shows, controls and regulates temperature in a refrigerated compartment from the exterior

of a fridge/freezer cabinet. It is dedicated to people who desire a nice-looking interface and a refined product interaction, as well as reduce on board power consumption. Thanks to the presence of an air sensor in the cabinet, the electronic control unit detects the actual air temperature and processes that in combination with the user selected settings, in order to define the compressor operation. Remote product interaction is extremely easy and accurate since data readings appear on the display,

like temperature set or detected, selection of energy saving operations, compressor's operation mode settings, (ITC, Eco and Overcooling mode) and choice of 3 battery protection levels. Product integration is simple, since the device is compatible with control units Indel Webasto Marine P/N SEG00002DA and SEG00030GA (respectively Secop versions 101N0212 and 101N0510 for BD35/50F) allowing a recess flush installation and a wall mounted. In combination with the Isotherm holding plates, it becomes ITC+, joining the benefits of the advanced system logic to the energy storing effect. **ITC+, the unbeatable combination.**



#### Convincing factors are:

- Available as retrofit kit or originally fitted on fridges in the factory
- Up to 25% energy saving due to a more efficient use of the compressor
- Up to 40% savings with combined effects of stored cooling energy in food and drinks
- Quick cooling in boost mode
- Soft start to avoid starting peaks
- Eco mode
- Easy to set battery protection directly from the display

# Cooling Technology

## Smart Energy Control

### Isotherm Smart Energy Control



#### Isotherm Smart Energy Control is a simple kit.

This kit can be easily retrofit to upgrade the energy saving

capabilities of most Isotherm refrigeration products.

The new CRUISE Elegance line provides a preformed location in the cabinet for the temperature sensor.

#### How does it work?

The sophisticated, processor-based Isotherm Smart Energy Control technology achieves significant power consumption savings by continuously scanning a set of key environmental factors to determine, through advanced proprietary algorithms, what is the most relevant compressor speed to maximize the performance/battery drain ratio (COP).



A dedicated air sensor which can continuously measure the cabinet air temperature.



Potentiometer to activate the Isotherm Smart Energy Control mode.



Processor-based module to be connected to the Secop compressor.

The device not only makes your fridge intelligent but also allows the storage of a significant amount of cold energy into the loaded food and drinks. Isotherm Smart Energy Control reduces the cabinet temperature more than a traditional fridge without freezing the food. This is continuously monitored by an air sensor in the cabinet. The cooling energy is stored when a power surplus is available (engine on or connection to grid) and reused first, before the fridge is running on battery.

#### The result: Significant energy savings.

##### External factors

- Cabinet air temperature
- Temperature set point
- Battery charge status
- Battery voltage

##### Configuration Parameters

- Cabinet size
- Offset values

##### Available potential of DC fridges

- Energy storage potential of loaded food/drinks
- Variable speed capability of DC compressors



##### Energy Savings

- Maximized performance/battery drain ratio (COP)
- Reuse of energy stored in food/drinks
- Speed modulation: Soft start up and boost mode

#### Multiple benefits from a simple kit:

- Up to 35 % savings due to a more efficient use of the compressor
- Up to 50 % savings with combined effects of stored cooling energy in food and drinks
- No need for eutectic plates/special storage devices
- Easy to retrofit
- Quick cooling in boost mode
- Soft start to avoid starting peaks



#### Can your fridge be upgraded?

Most Isotherm refrigeration products can be upgraded with Isotherm Smart Energy Control. Please contact your dealer to request application and installation guidelines.

# Cooling Technology

## Frost-free technology



### **Frost-free – Award winning technology**


The Indel Webasto Marine Frost-free concept is based on an intelligent principle that prevents the accumulation of ice inside the freezer thus keeping energy consumption low. All models equipped with the Frost-free concept are extremely economical and save energy on board.

### **The advantages of the Frost-free concept:**

- Exclusive Indel Webasto Marine technology for the marine market
- No ice accumulation for an excellent efficiency increase
- Exceptional cooling achievement: the refrigerator and the freezer reach the set temperature faster
- Stable inside temperature
- Manual defrosting becomes redundant
- No more unpleasant water pools resulting from incorrect manual defrosting





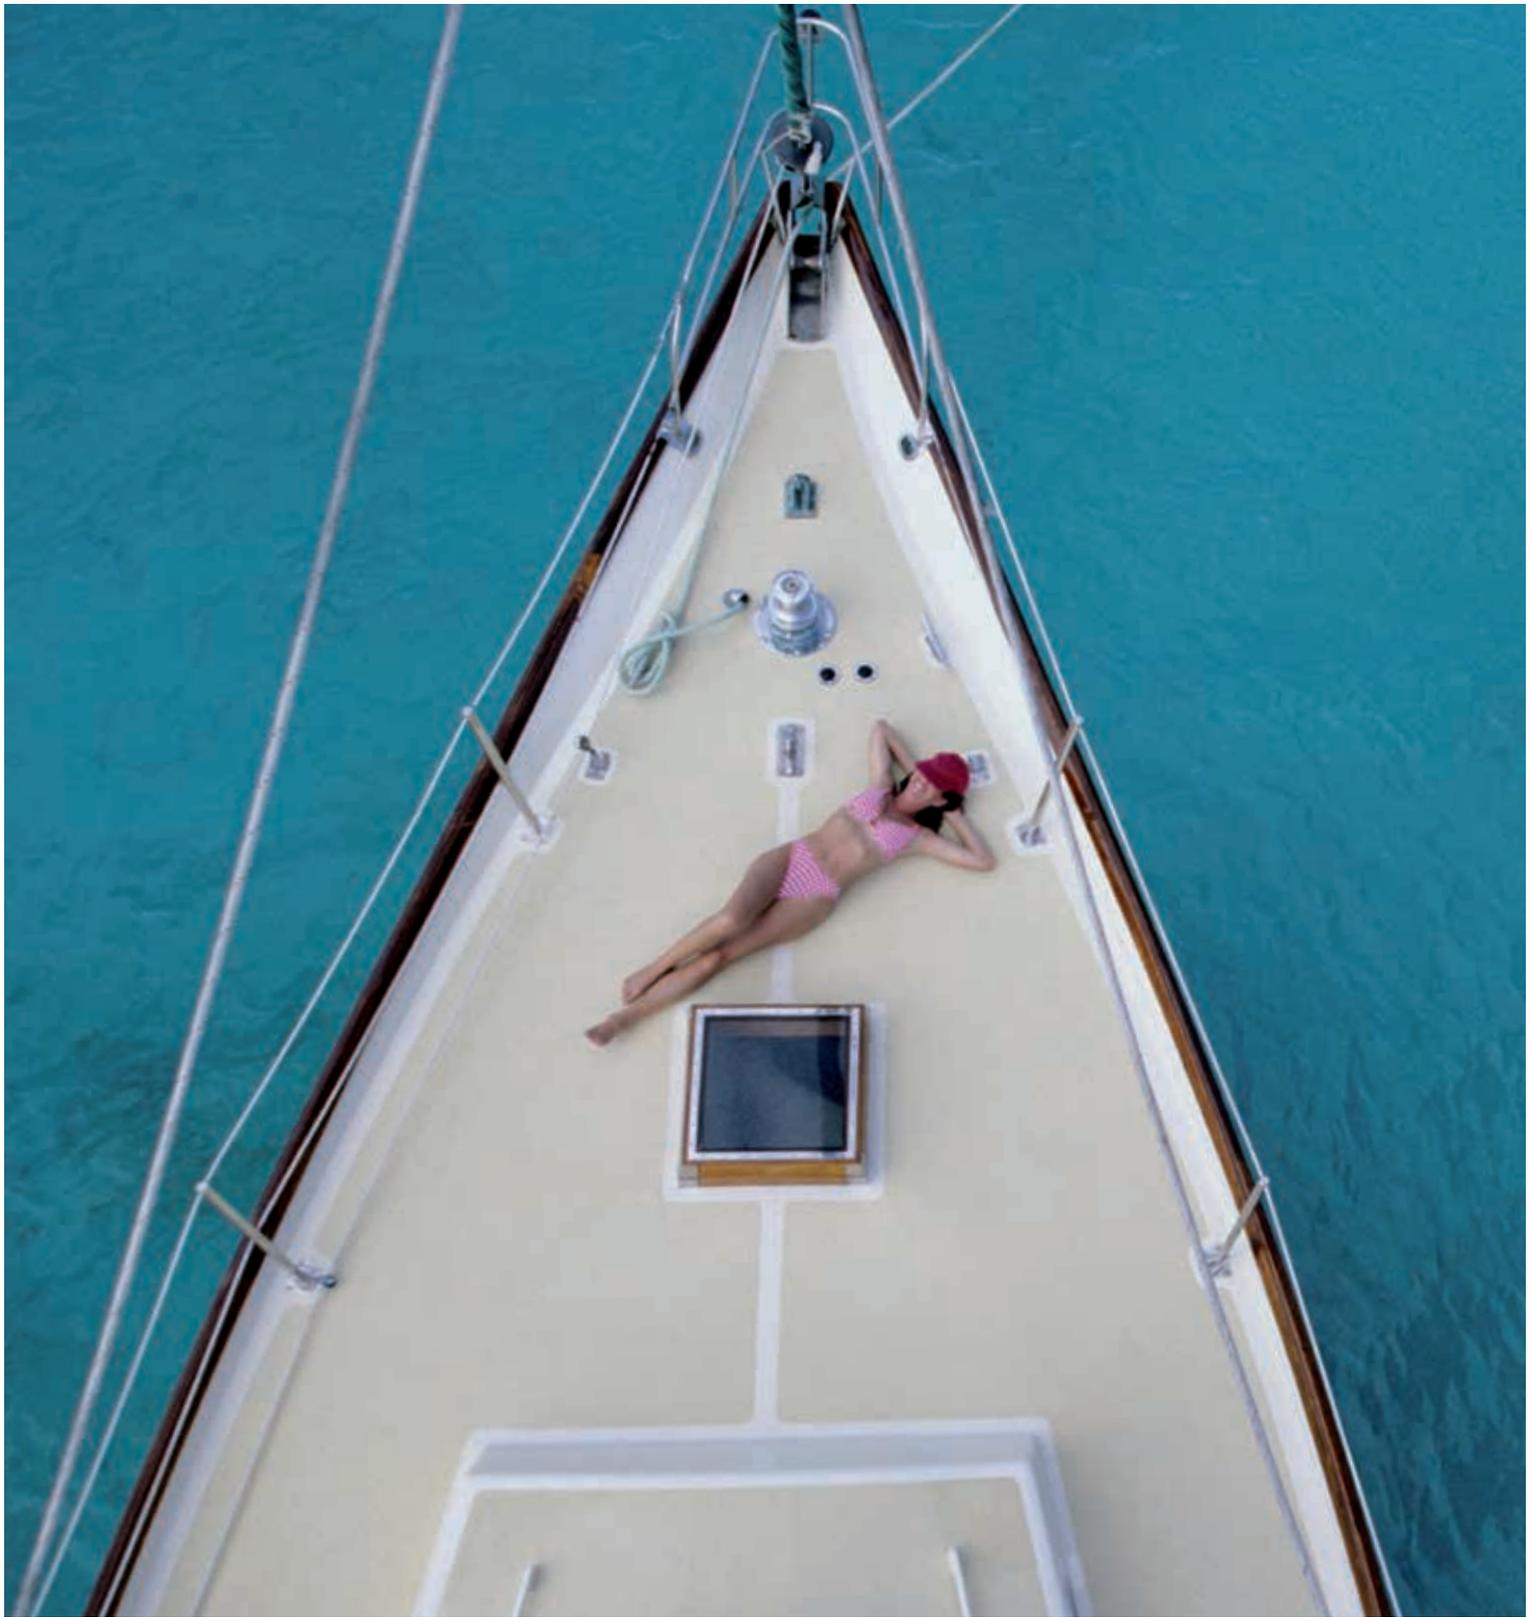

## Isotherm Cooling Units


Indel Webasto Marine provides different solutions to cool at best some custom volumes using air or seawater for efficient heat removal.

# Cooling Units

Isotherm Cooling Units	66
<hr/>	
Core Components	68
<hr/>	
Control elements	69
<hr/>	
ITC+	70
<hr/>	
<b>Cooling System</b>	<b>72</b>
Air-cooled	76
Water-cooled SP	81
Water-cooled Magnum	83
<hr/>	
Cooling Unit ITC+	85
<hr/>	

# Isotherm Cooling Units

An innovative modular concept


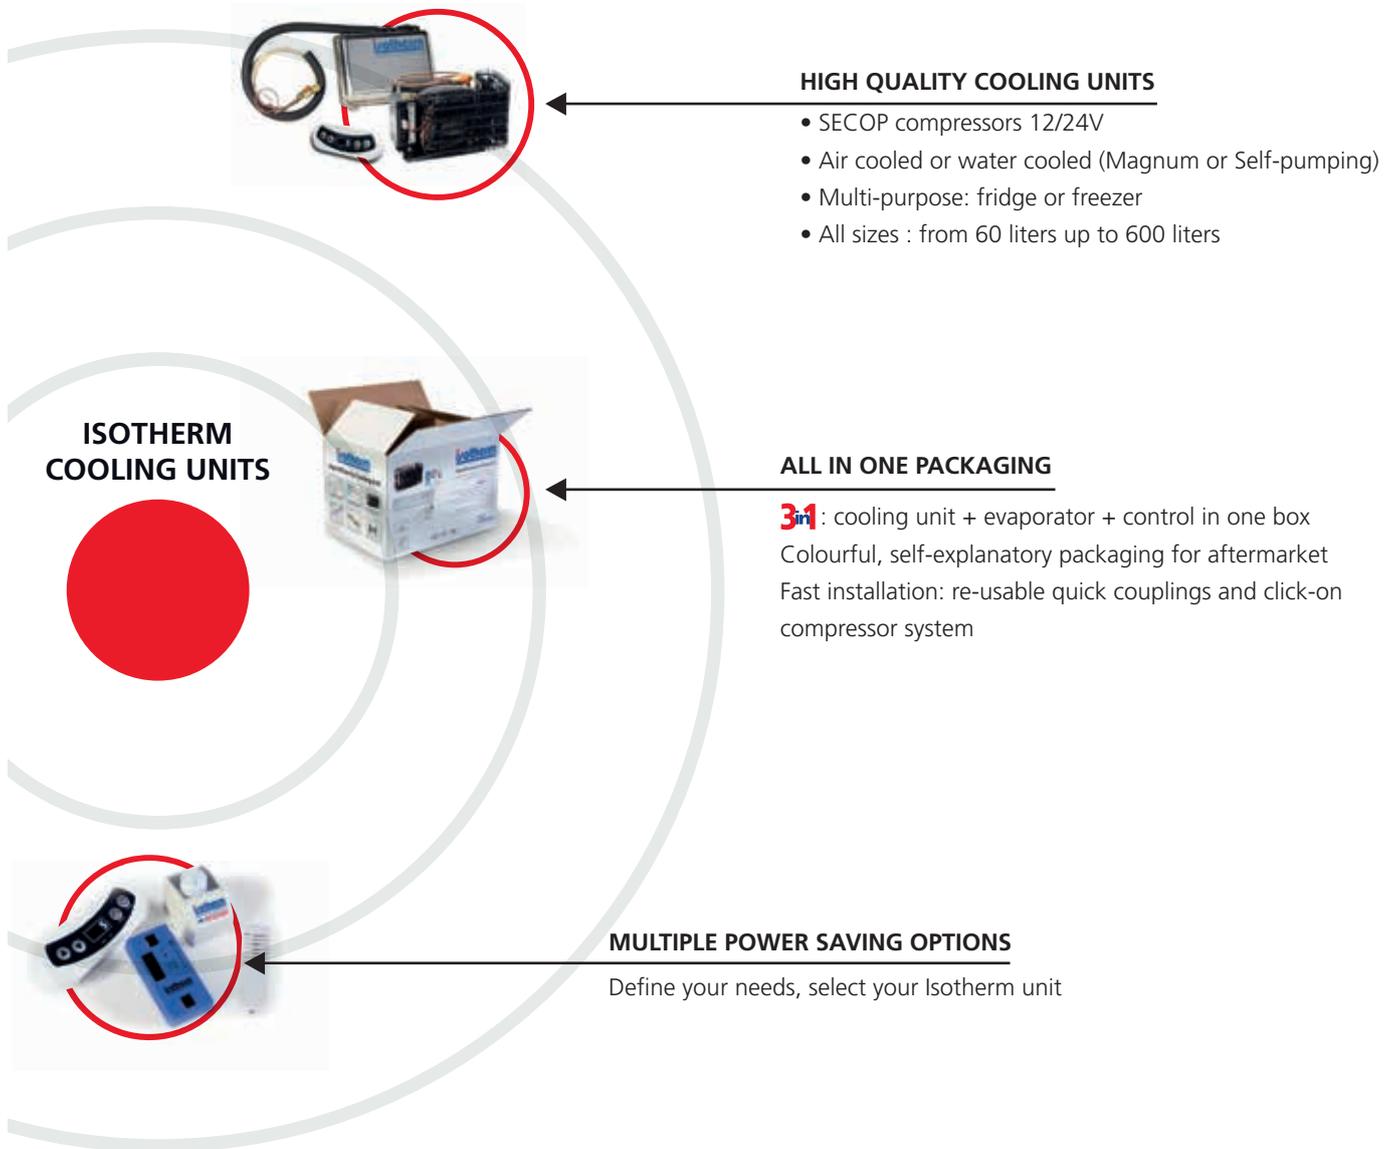


## SELECTION MATRIX

Type	Control Interface	Energy Saving	Fast Cooling	Functions
Isotherm	Mechanical	0	++	
ITC	Digital	++	++	1.Dynamic control of battery charging status 2. Standard energy savings (overcooling, fixed compressor speeds) 3. Eco mode to extend battery autonomy 4.AC and/or DC applications possible
ITC+	Digital	+++	+	
SEC	Electronic	++++	+++	1.Full modulation of compressor speed 2.Advanced parameter settings to maximize energy savings 3.High energy savings without need for cold storage device 4.DC application only

# Isotherm Cooling Units

Ready to match any demand

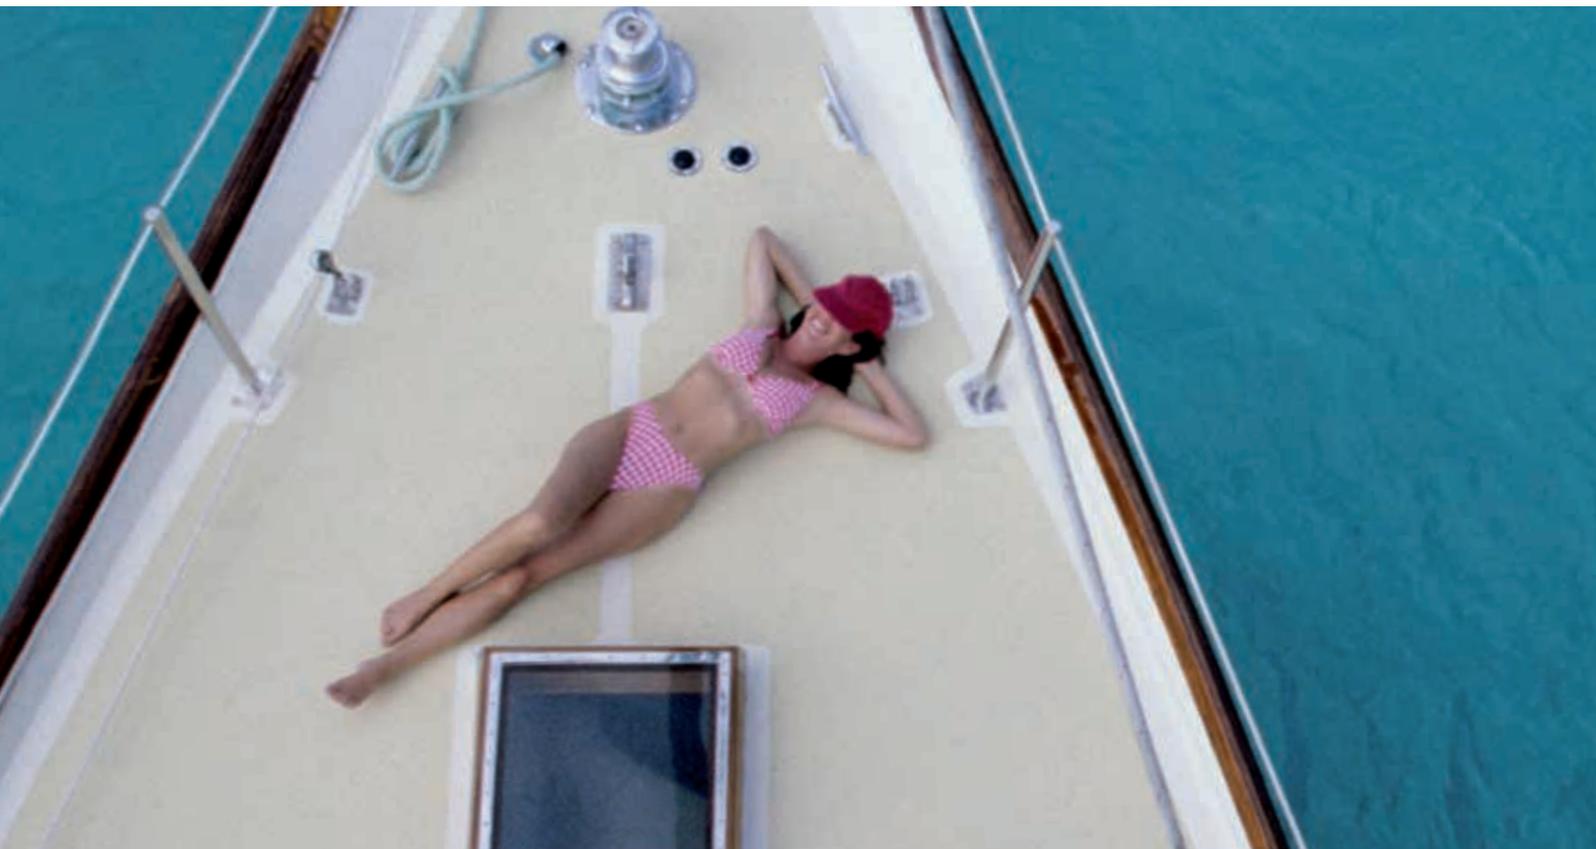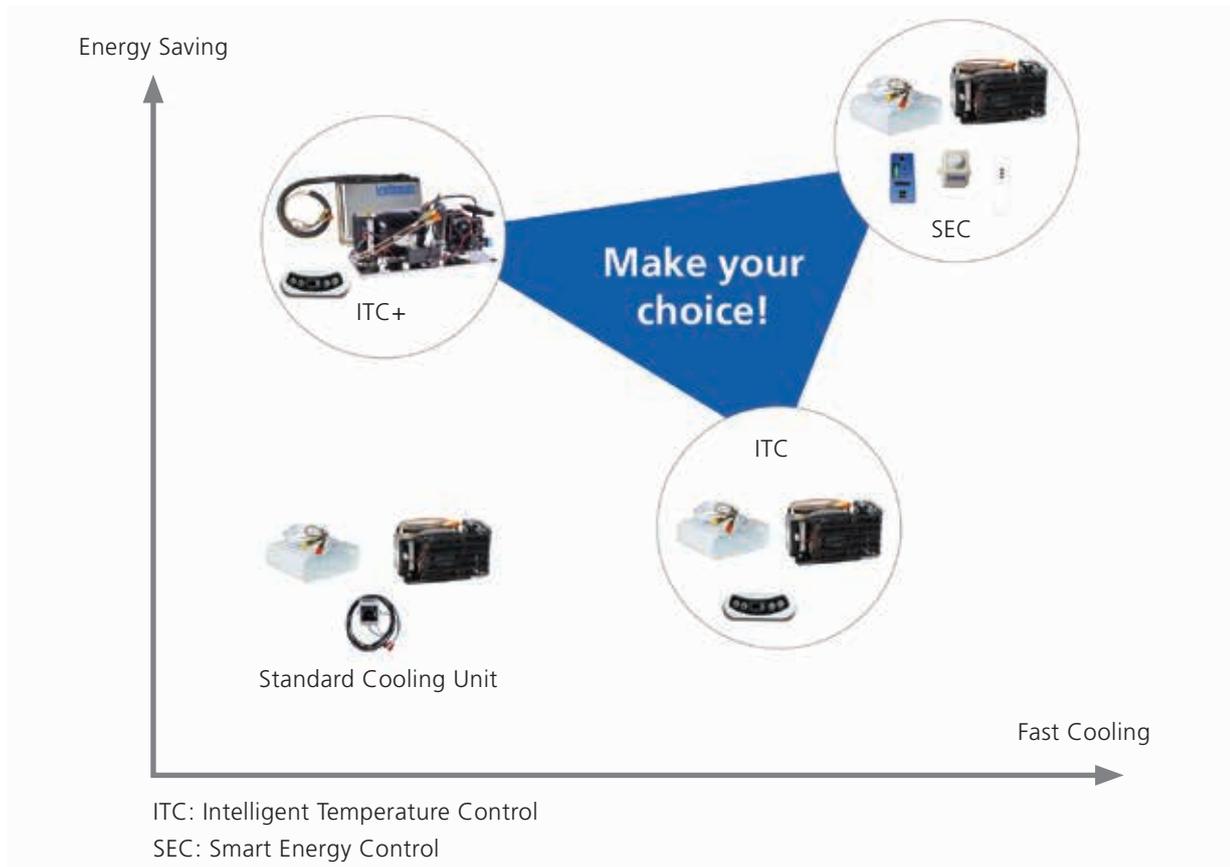

# Isotherm Cooling Units

## Core Components

### The best and widest product range available on the market!

The Indel Webasto Marine product portfolio with regards to cooling units, represents the most technologically advanced and complete selection available on the market. Capable to match any demand, it ranges from 60 to 600 liters of cooling capacity, being extremely flexible in product customization. Free your layouts and get maximum benefits of your on board space with Isotherm cooling units!

The Secop compressors are now even more power efficient! Hermetically sealed, extremely quiet running and reliable, they are specifically tuned for Indel Webasto Marine applications. The three-phase current is created in a small microprocessor, where Indel Webasto Marine has been able to program a number of functions which check and control many of the unit systems. This allows achieving the lowest possible power consumption. The same compressor is used both for 12 V and 24 V systems and the electronic unit is able to protect itself from accidental reversal of the voltage polarity. Isotherm Power Pack available for AC/DC application, to allow sufficient power supply all around the world.

A wide range of evaporators, exclusive Isotherm know-how, allow an unbeatable product performance and flexible on board application. The variety of controls matches any customer demands and ensures the lowest power consumption on the market.

**Feel free to select the best way to dissipate heat based on your application's constrain, via air or water cooling. As a final step, select the best control system based on your application needs, with the unique plus of being delivered with a self-explanatory all-in-one packaging! (Only for premium products as SEC, ITC and ITC+).**



#### Re-Usable Quick couplings

All cooling units are equipped with the new type of quick couplings, that can be disconnected without any gas leaking like the former versions.

In addition to the above, the valve assembly inside the coupling's body can be easily replaced, without welding operations.



#### Practical click-on mounting bracket

A practical click-on mounting bracket suitable for horizontal or vertical wall installation, is included in all models except the Magnum models.

Fasten the bracket and lift the compressor into place.

„Click“! The compressor locks onto the bracket without adjustments or tools.



# Isotherm Cooling Units

## Control Elements

---



The mechanical thermostat represents the standard control element of the cooling unit program, being reliable and easy to use for boat owners. It is allowing a fast cooling process of the compartment representing, managing compressor's activation on a basic on/off command.

The ITC Digital Display (Intelligent Temperature Control) clearly shows, controls and regulates the temperature in a refrigerated compartment from the exterior of a fridge/freezer cabinet. It is dedicated to people that desire a nice-looking interface and a professional product interaction, as well as reduce the on board power consumption thanks to its specific factory settings. (ITC, Eco and overcooling mode) a dedicated Air sensor always provides accurate readings and the user can chose among three different battery's protection levels. The ITC Digital Display in conjunction with a Holding Plate forms a cooling unit called ITC+, where the storing energy effect is amplified thanks to the huge range of plates available.



The Smart Energy Control (SEC) is a sophisticated processor-based control device, that achieves significant power consumption by continuously scanning a set of key environmental factors, to operate the compressors at their best performance/battery drain ratio. Via the storage function in food and drinks can achieve up to 50% savings Vs. conventional control systems, representing the best answers for users hunting for the lowest power consumption.

# Isotherm Cooling Units

## ITC+

The ITC+ technology represents the best in terms of both cooling performances and temperature control, since the typical features of the ITC digital panel are enhanced by the storing energy effect of the eutectic plate.

The control logic detects when a surplus of power is available, uses this power to freeze the cooling plate which consequently stores the cold for times, when no power is available for cooling purposes.

A high-quality Secop compressor builds the core of the ITC+, together with the Isotherm holding plate and the exclusive electronic control system being an unbeatable combination.

### How much power is needed?

**This is the most frequently asked question of all.**

We can give exact power consumption figures for our range of refrigerators, freezers and boxes, as we know their size and quality of insulation. It is more difficult to quote a figure for self-installed refrigeration boxes as we do not know the exact size of the box, or even more important, the quality and thickness of the insulation material used.



### ITC+

The intelligent refrigerator charges the holding plate while the engine is running by means of the patented energy management system.



- Low power consumption
- Digital interface with accurate display of temperature
- Fridge or freezer (-12°C)
- 12/24 V Secop compressor
- Isotherm Power Pack available for AC/DC application
- Easy installation thanks to "click-on" system



- Low power consumption
- Digital interface with accurate display of temperature
- Fridge or freezer (-12°C)
- 12/24 V Secop compressor
- Kit AC/DC optional for a complete power supply compatibility
- Easy installation thanks to "click-on" system
- SP system (patented) to reduce noise of standard fan cooled condenser systems



- Low power consumption
- Digital interface with accurate display of temperature
- Fridge or freezer (-12°C)
- 12/24 V Secop compressor
- Kit AC/DC optional for a complete power supply compatibility
- Self-priming seawater pump (variable speed) to ensure extra high efficiency for tropical applications



# Isotherm Cooling Units

## Cooling systems

### Three possible cooling systems

Indel Webasto Marine provides a wide range of cooling units to suit every demand. For efficient heat removal various methods can be applied. Isotherm cooling units use air or seawater to eliminate the heat.



#### Self-pumping sea water-cooled

The Isotherm SP units cool with the use of seawater. This method has the advantage that the heat exchange is made via a water cooled condenser. The water-cooled Isotherm SP operates consistently at an extremely high level of efficiency. Without fans or pumps to remove the heat generated by the condenser, the SP system consumes less battery power and is remarkably quiet.

The Isotherm SP unit uses the movements of the hull to draw heat down and out through a special fitting in the galley sink drain hose. The flow is completely free inside the draining hose, so each movement of the surrounding water produces a similar quantity of water level inside the hose, which results in pumping an equivalent amount of water in and out. By designing a special hull fitting containing a non restricting, fullflow spiral heat exchanger for cooling the heated refrigeration agent, an extremely efficient cooling system is created.

As the hull fitting is situated away from the boat's center of gravity, the smallest movement of the hull or mast of sailing boat is sufficient to create a pumping action. This movement results in constant withdraw of warm water and intake of cold water which also prevents fouling.

- Fridge versions or freezer versions available
- 12/24 V Secop compressor
- Isotherm Power Pack available for AC/DC application
- Easy installation thanks to "click-on" system on DC models
- SP system (patented) to reduce the noise of a ventilated condenser and reach a lower power consumption



- Sea water cooling for even higher efficiency
- Lower power consumption
- Silent – no fan nor pumps
- Heat removed by sea water (max. temperature 28°C)
- No extra holes in hull required
- Simple to fit. Replaces the through-hull fitting for galley sink



### Air-cooling

Using air which is blown through the condenser by a fan is the traditional way to remove the heat. It is important that the compressor compartment is well ventilated allowing cold air to enter from below and hot air to escape to the top.




- Fridge versions or freezer versions available
- 12/24 V Secop compressor
- Isotherm Power Pack available for AC/DC application
- Easy installation thanks to "click-on" system on DC models



### Isotherm Magnum – Seawater cooled electric pump

Isotherm Magnum units are especially designed for vessels with exceptionally high refrigeration requirements, for example vessels sailing in tropical waters. Isotherm Magnum uses the surrounding water to increase cooling efficiency. All Magnum models are fitted with integral seawater pumps for circulating the cooling water through the cooling section of the refrigerator compressor. The pump is quiet, self-priming, withstands dry running and is self-aerating. The highly efficient heat exchanger is manufactured in a corrosion-resistant copper-nickel alloy and fitted with a zinc anode. Sea water-cooled units are extremely efficient and offer increased cooling capacity.

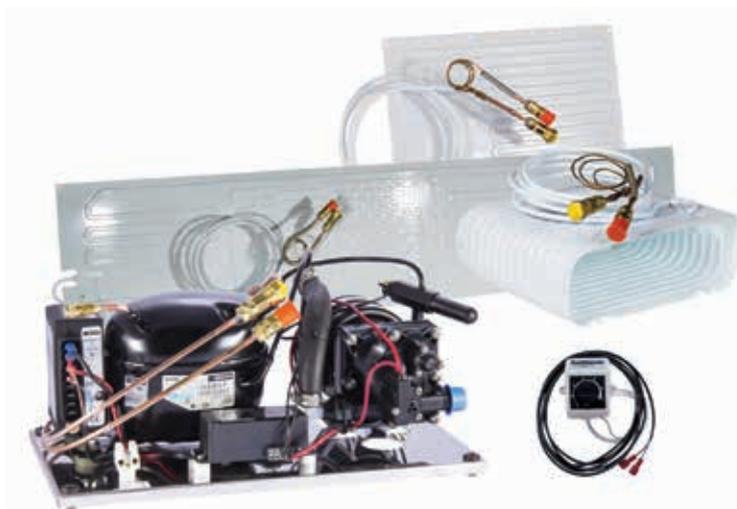

- Fridge versions or freezer versions available
- 12/24 V Secop compressor
- Isotherm Power Pack available for AC/DC application
- Self-priming sea water pump to ensure extra high efficiency for tropical applications
- Variable speed water pump according to the temperature of the water circulating inside the condenser

# Isotherm Cooling Units

## Fridge, Freezer, Fridge/Freezer

### Technical Data:

System	Unit code	Max Volume (l)		Dimensions evaporator (mm)	Dimensions compressor W x H x D (mm)	Weight (kg)	Secop Compressor type	Control
		Fridge	Freezer					
<b>Fridge</b>								
Air-cooled	U060X000P11111AA	60	-	"Flat" 350 x 130	280 x 160 x 175	9	BD35F	Mechanical
Air-cooled	U080X000P11111AA	80	-	"Flat" 350x250	280 x 160 x 175	9	BD35F	Mechanical
Air-cooled	U100X000L11111AA	100	-	"L" 250 + 110 x 350	280 x 160 x 175	12	BD35F	Mechanical
Water-cooled SP	U100X000L11311AA	100	-	"L" 250 + 110 x 350	280 x 160 x 175	14	BD35F	Mechanical
Air-cooled	U100X000L11111AC	100	-	"L" 270 + 95 x 250	280 x 160 x 175	10	BD35F	Mechanical
Air-cooled	U125X000L11111AA	125	-	"L" 400 + 170 x 210	280 x 160 x 175	9	BD35F	Mechanical
Water-cooled SP	U125X000L11311AA	125	-	"L" 400 + 170 x 210	280 x 160 x 175	11	BD35F	Mechanical
Air-cooled	U125X000R11111AA	125	-	"Oval" 240 x 210 x 85	280 x 160 x 175	9	BD35F	Mechanical
Water-cooled SP	U125X000R11311AA	125	-	"Oval" 240 x 210 x 85	280 x 160 x 175	11	BD35F	Mechanical
Air-cooled	U150X000P11111AA	150	-	"Flat" 386 x 361	280 x 160 x 175	9	BD35F	Mechanical
Air-cooled	U150X000R11111AA	150	-	"Oval" 320 x 100 x 230	280 x 160 x 175	9	BD35F	Mechanical
Air-cooled	U150X000R11111AB	150	-	"Oval" 320 x 100 x 230	280 x 160 x 175	9	BD35F	Mechanical
Air-cooled	U150X000F11111AA	150	-	275 x 220 x 70	280 x 160 x 175	10	BD35F	Mechanical
Water-cooled SP	U150X000R11311AA	150	-	"Oval" 320 x 100 x 230	280 x 160 x 175	11	BD35F	Mechanical
Air-cooled	U200X000R11111AA	200	-	"Oval" 380 x 140 x 270	330 x 160 x 175	9	BD50F	Mechanical
<b>Freezer</b>								
Water-cooled SP	U000X041L13311AA	-	41	"L" 400 + 170 x 210	280 x 160 x 175	12	BD35F	Mechanical
Air-cooled	U000X041L13111AA	-	41	"L" 400 + 170 x 210	280 x 160 x 175	9	BD35F	Mechanical
Air-cooled	U000X066P13111AA	-	66	"Flat" 1200 x 190	330 x 160 x 175	12	BD50F	Mechanical
Air-cooled	U000X086P13111AA	-	86	"Flat" 1000 x 270	330 x 160 x 175	12	BD50F	Mechanical
Air-cooled	U000X133P13111AA	-	133	"Flat" 1370 x 330	330 x 160 x 175	12	BD50F	Mechanical
Water-cooled Magnum	U000X141P13411AA	-	141	"Flat" 1370 x 330	420 x 240 x 400	15	BD80F	Mechanical
Water-cooled Magnum	U000X200P13411AA	-	200	"Flat" 1500 x 460	420 x 240 x 400	15	BD80F	Mechanical
<b>Fridge/Freezer</b>								
Air-cooled	U060X020P17161AA	60	20	"Flat" 350 x 130	280 x 160 x 175	9	BD35F	ITC
Air-cooled	U060X020P17151AA	60	20	"Flat" 350 x 130	280 x 160 x 175	9	BD35F	SEC
Air-cooled	U080X026P17161AA	80	26	"Flat" 350 x 250	280 x 160 x 175	9	BD35F	ITC
Air-cooled	U080X026P17151AA	80	26	"Flat" 350 x 250	280 x 160 x 175	9	BD35F	SEC
Air-cooled	U100X033L17161AA	100	33	"L" 250 + 110x 350	280 x 160 x 175	14	BD35F	ITC
Air-cooled	U100X033L17151AA	100	33	"L" 250 + 110x 350	280 x 160 x 175	14	BD35F	SEC
Air-cooled	U125X041L17161AA	125	41	"L" 400 + 170 x 210	280 x 160 x 175	9	BD35F	ITC
Air-cooled	U125X041L17151AA	125	41	"L" 400 + 170 x 210	280 x 160 x 175	9	BD35F	SEC
Air-cooled	U125X041R17161AA	125	41	"Oval" 240 x 210 x 85	280 x 160 x 175	9	BD35F	ITC
Air-cooled	U125X041R17151AA	125	41	"Oval" 240 x 210 x 85	280 x 160 x 175	9	BD35F	SEC
Air-cooled	U150X050P17161AA	150	50	"Flat" 386 x 361	280 x 160 x 175	9	BD35F	ITC
Air-cooled	U150X050R17161AA	150	50	"Oval" 320 x 100 x 230	330 x 160 x 175	9	BD50F	ITC
Air-cooled	U150X050R17151AA	150	50	"Oval" 320 x 100 x 230	330 x 160 x 175	9	BD50F	SEC
Water-cooled Magnum	U200X066R12411AA	200	66	"Oval" 380 x 140 x 270	420 x 240 x 200	15	BD50F	Dual
Air-cooled	U200X066P12111AA	200	66	"Flat" 1200 x 190	330 x 160 x 175	12	BD50F	Dual
Air-cooled	U260X086P12111AA	260	86	"Flat" 1000 x 270	330 x 160 x 175	11	BD50F	Dual
Water-cooled Magnum	U260X086P12411AA	260	86	"Flat" 1000 x 270	420 x 240 x 200	14	BD50F	Dual
Air-cooled	U400X133P12111AA	400	133	"Flat" 1370 x 300	330 x 160 x 175	12	BD50F	Dual
Water-cooled Magnum	U400X133P12411AA	400	133	"Flat" 1370 x 300	420 x 240 x 200	16	BD50F	Dual
Air-cooled	U170X056P12111AA	170	56	"Flat" 815 x 210	330 x 160 x 175	11	BD50F	Dual
Air-cooled	U170X056P17161AA	170	56	"Flat" 815 x 210	330 x 160 x 175	11	BD50F	ITC
Air-cooled	U100X035A17161AA	100	35	2	280 x 160 x 175	14	BD35F	ITC+
Air-cooled	U150X050A17161AA	150	50	3	330 x 160 x 175	16	BD50F	ITC+

# Isotherm Cooling Units

## Fridge/Freezer ITC+, Accessories

### Technical Data:

System	Unit code	Max Volume (l)		Holding Plate (l)	Dimensions compressor W x H x D (mm)	Weight (kg)	Secop Compressor type	Control
Fridge/Freezer		Fridge	Freezer					
Air-cooled	U200X065A17161AA	200	65	6	330 x 160 x 175	16	BD50F	ITC+
Water-cooled Magnum	U150X050A17461AA	150	50	3	420 x 240 x 200	19	BD50F	ITC+
Water-cooled SP	U100X035A17361AA	100	35	2	280 x 160 x 175	14	BD35F	ITC+
Water-cooled SP	U150X050A17361AA	150	50	3	420 x 240 x 200	18	BD50F	ITC+

### IPN Intelligent Part Numbering

With the Isotherm IPN system (Intelligent Part Numbering) will be extremely easy to configure your cooling system for the best customization! The self-explanatory part number structure is capable to clearly specify units' characteristics at a glance, by simply reading it. The structure is made by 16 digits, with the first 8 dedicated to explain:

- Function (fridge, freezer or fridge freezer)
- Maximum liters capacity (as fridge or freezer, according to minimum insulation requirements as per Isotherm specifications)

### IPN Isotherm system, your cooling unit has never been so easy to understand and configure!



U125X000 In this case the unit is a FRIDGE - with maximum 125 lt. capacity

U125X041 In this case the unit is a FRIDGE - FREEZER - with maximum 125 lt. capacity as fridge and 41 lt. as freezer

U000X041 In this case the unit is a FREEZER - with maximum 41 lt. capacity

### Cooling Units Accessories:

Picture	Order Number	Description	Picture	Order Number	Description
	SEH00017HA	POWER PACK 110/240 V AC 47/63 Hz IN 24 V DC 4,2 A OUT for BD35F/BD50F		SBE00006AA	Zinc anode for sea water-cooled SP units
	SEH00018HA	POWER PACK 108W 100/240VAC 50/60HZ 24VDC USA PLUG		SBE00008AA	Zinc anode, 3/8", for sea water-cooled Magnum units
	SEH00019HA	POWER PACK 108W 100/240VAC 50/60HZ 24VDC AU PLUG		SGC00005AA	Evaporator door O-SMALL
	SEH00020HA	POWER PACK 108W 100/240VAC 50/60HZ 24VDC UK PLUG		SGC00004AA	Evaporator door O-MEDIUM
	SED00035GA	POWER PACK 230V 47/63HZ 24V DC/7A BD80F		SGC00003AA	Evaporator door O-BIG
	SED00035PA	POWER PACK 115V 47/63HZ 24V DC/7A BD80F SPINA USA		SEA00004DB	Double thermostat kit, 10 °C to -20 °C
	SEC00004DA	Internal light kit 12 – 24 V		SFD00008AA	Skin fitting valve kit for SP units
	SBE00004AA	Air hose adapter kit Ø 106 mm (l = 1.500 mm)		SBE00071CA	Air circulation fan
	SGE00012AA	"Click-on" bracket for an easy compressor' installation		SGC00152AA	Foldable bottle rack
	SEA00048DB	High speed Thermostat kit for freezers		SGC00006AA	Ice cube kit for holding plate
	SBD00031XA	Extension tube with couplings (l = 1 m)			
	SBD00154XA	Extension tube with couplings (l = 2 m)			
	SBD00155XA	Extension tube with couplings (l = 3 m)			

# Air-cooled

## Cooling Unit BD35F base

Select your control



Mechanical



ITC



SEC




160

280

175

### SPECIFICATIONS

Evaporator	Flat
Max. Box Volume Fridge (l)	60
Max. Box Volume Freezer (l)	20

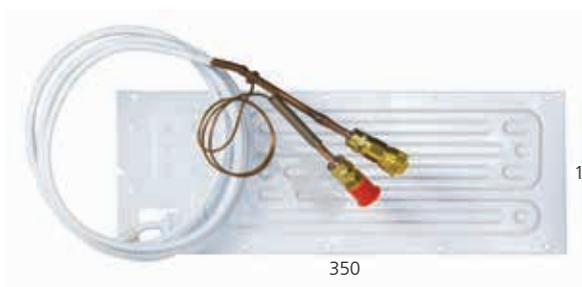

350

130

FUNCTION	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U060X000P11111AA	FRIDGE UNIT 60L FLAT EVAPORATOR 350x130mm 12/24V DC(2005)	Mechanical
Fridge/freezer	U060X020P17161AA	FRIDGE/FREEZER UNIT 60/20L FLAT EVAPORATOR 350x130mm 12/24V DC ITC (2005)	ITC
Fridge/freezer	U060X020P17151AA	FRIDGE/FREEZER UNIT 60/20L FLAT EVAPORATOR 350x130mm 12/24V DC SEC (2005)	SEC

### SPECIFICATIONS

Evaporator	Flat
Max. Box Volume Fridge (l)	80
Max. Box Volume Freezer (l)	26




350

250

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U080X000P11111AA	FRIDGE UNIT 80L FLAT EVAPORATOR 350x250mm 12/24V DC (GE80)	Mechanical
Fridge/freezer	U080X026P17161AA	FRIDGE/FREEZER UNIT 80/26L FLAT EVAPORATOR 350x250mm 12/24V DC ITC (GE80)	ITC
Fridge/freezer	U080X026P17151AA	FRIDGE/FREEZER UNIT 80L/26L FLAT EVAPORATOR 350x250mm 12/24V DC SEC (GE80)	SEC

### SPECIFICATIONS

Evaporator	L
Max. Box Volume Fridge (l)	100
Max. Box Volume Freezer (l)	33

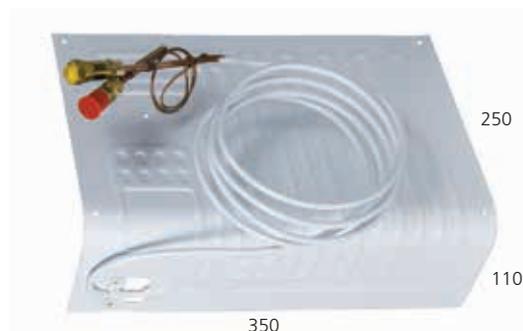

350

250

110

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U100X000L11111AA	FRIDGE UNIT 100L "L" BENT EVAPORATOR 250+110x350mm 12/24V DC (2007)	Mechanical
Fridge/freezer	U100X033L17161AA	FRIDGE/FREEZER UNIT 100/33L "L" BENT EVAPORATOR 250+110x350mm 12/24V DC ITC (2007)	ITC
Fridge/freezer	U100X033L17151AA	FRIDGE/FREEZER UNIT 100/33L "L" BENT EVAPORATOR 250+110x350mm 12/24V DC SEC (2007)	SEC

# Air-cooled

## Cooling Unit BD35F base

Select your control



Mechanical




ITC



SEC




SPECIFICATIONS	
Evaporator	L
Max. Box Volume Fridge (l)	100

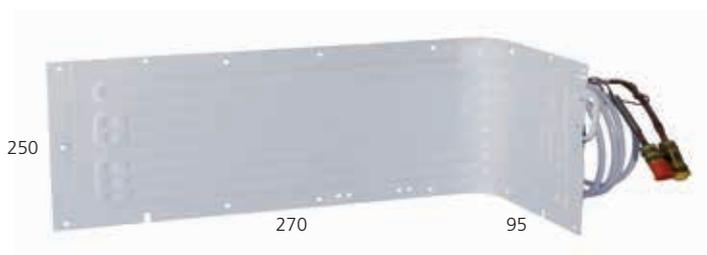

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U100X000L11111AC	FRIDGE UNIT 100L "L" BENT EVAPORATOR 270+95x250mm 12/24V DC (2018)	Mechanical

SPECIFICATIONS	
Evaporator	L
Max. Box Volume Fridge (l)	125
Max. Box Volume Freezer (l)	41

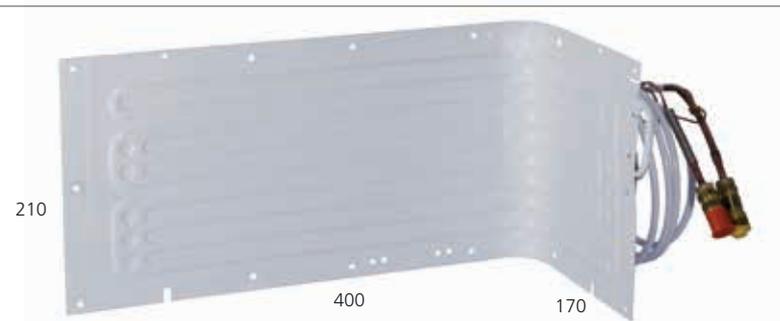

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U125X000L11111AA	FRIDGE UNIT 125L BIG "L" BENT EVAPORATOR 400+170x210mm 12/24V DC (2010)	Mechanical
Freezer	U000X041L13111AA	FREEZER UNIT 41L "L" BENT EVAPORATOR 400+170x210mm 12/24 (2010)	Mechanical
Fridge/freezer	U125X041L17161AA	FRIDGE/FREEZER UNIT 125/41L "L" BENT BIG EVAPORATOR 400+170x210mm 12/24V DC ITC (2010)	ITC
Fridge/freezer	U125X041L17151AA	FRIDGE/FREEZER UNIT 125L/41L BIG "L" BENT EVAPORATOR 400+170x210mm 12/24V DC SEC (2010)	SEC

SPECIFICATIONS	
Evaporator	O
Max. Box Volume Fridge (l)	125
Max. Box Volume Freezer (l)	41



CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U125X000R11111AA	FRIDGE UNIT 125L OVAL EVAPORATOR 4L 240x210x85mm 12/24V DC (2001)	Mechanical
Fridge/freezer	U125X041R17161AA	FRIDGE/FREEZER UNIT 125/41L OVAL EVAPORATOR 4L 240x210x85mm 12/24V DC ITC (2001)	ITC
Fridge/freezer	U125X041R17151AA	FRIDGE/FREEZER UNIT 125/41L OVAL EVAPORATOR 4L 240x210x85mm 12/24V DC SEC (2001)	SEC

# Air-cooled

## Cooling Unit BD35F base

Select your control



Mechanical



ITC



SEC



160

280

175

### SPECIFICATIONS

Evaporator	Flat
Max. Box Volume Fridge (l)	150
Max. Box Volume Freezer (l)	50



386

361

FUNCTION	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U150X000P11111AA	FRIDGE UNIT 150L FLAT EVAPORATOR 386x361mm 12/24V DC (GE150)	Mechanical
Fridge/freezer	U150X050P17161AA	FRIDGE/FREEZER UNIT 150/50L FLAT EVAPORATOR 386x361mm 12/24V DC ITC (GE150)	ITC

### SPECIFICATIONS

Evaporator	O
Max. Box Volume Fridge (l)	150
Max. Box Volume Freezer (l)	50



230

320

100

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U150X000R11111AA	FRIDGE UNIT 150L OVAL EVAPORATOR 7,5L 320x100x230mm 12/24V (2301)	Mechanical
Fridge	U150X000R11111AB	FRIDGE UNIT 150L OVAL EVAPORATOR 7,5L 320x100x230mm 12/24V DC (2309) WITH EVAPORATOR DOOR	Mechanical
Fridge/freezer	U150X050R17161AA	FRIDGE/FREEZER UNIT 150/50L OVAL EVAPORATOR 7,5L 320x100x230mm 12/24V DC ITC (2301)	ITC
Fridge/freezer	U150X050R17151AA	FRIDGE/FREEZER UNIT 150/50L EVAPORATOR OVAL 7,5L 320x100x230mm 12/24V DC SEC (2301)	SEC

### SPECIFICATIONS

Evaporator	275 x 220 x 70
Max. Box Volume Fridge (l)	150



275

70

220

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U150X000F11111AA	FRIDGE UNIT 150L FINS VENTILATED EVAPORATOR 150 L 275x220x70mm 12/24V DC	Mechanical

# Air-cooled

## Cooling Unit BD50F base

Select your control



Mechanical



ITC



SEC




SPECIFICATIONS	
Evaporator	O
Max. Box Volume Fridge (l)	200
Max. Box Volume Freezer (l)	66




CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U200X000R11111AA	FRIDGE UNIT 200L OVAL EVAPORATOR 14L 380x140x270mm 12/24V DC (2501)	Mechanical

SPECIFICATIONS	
Evaporator	Flat
Max. Box Volume Fridge (l)	200
Max. Box Volume Freezer (l)	66

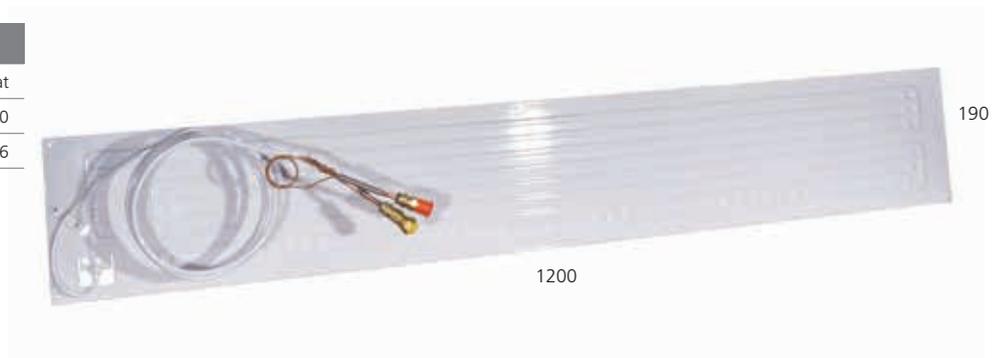

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Freezer	U000X066P13111AA	FREEZER UNIT 66L FLAT EVAPORATOR 1200x190mm 12/24V DC (2016)	Mechanical
Fridge/freezer	U200X066P12111AA	FRIDGE/FREEZER UNIT 200L/66L FLAT EVAPORATOR 1200x190mm 12/24V DC DUAL (2016)	Dual

SPECIFICATIONS	
Evaporator	Flat
Max. Box Volume Fridge (l)	260
Max. Box Volume Freezer (l)	86

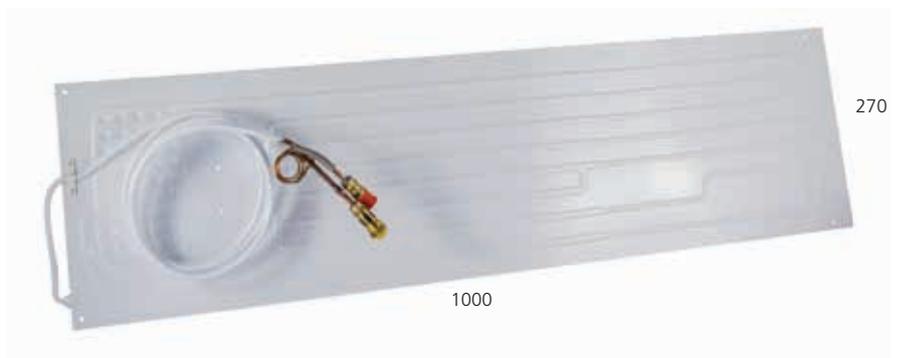

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Freezer	U000X086P13111AA	FREEZER UNIT 86L FLAT EVAPORATOR 1000x270mm 12/24V DC (2017)	Mechanical
Fridge/freezer	U260X086P12111AA	FRIDGE/FREEZER UNIT 260L/86L FLAT EVAPORATOR 1000x270mm 12/24V DC DUAL (2017)	Dual

# Air-cooled

## Cooling Unit BD50F base

Select your control



Mechanical



ITC



SEC




160

175

330

### SPECIFICATIONS

Evaporator	Flat
Max. Box Volume Fridge (l)	400
Max. Box Volume Freezer (l)	133

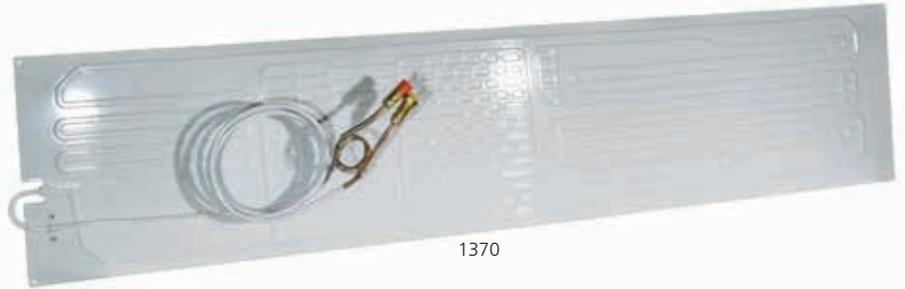

300

1370

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Freezer	U000X133P13111AA	FREEZER UNIT 133L FLAT EVAPORATOR 1370x300mm 12/24V DC (2013)	Mechanical
Fridge/freezer	U400X133P12111AA	FRIDGE/FREEZER UNIT 400L/133L FLAT EVAPORATOR 1370x300mm 12/24V DC DUAL (2013)	Dual

### SPECIFICATIONS

Evaporator	Flat
Max. Box Volume Fridge (l)	170
Max. Box Volume Freezer (l)	56



210

815

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge/freezer	U170X056P12111AA	FRIDGE/FREEZER UNIT 170L/56L FLAT EVAPORATOR 815x210mm 12/24V DC DUAL (2012)	Dual
Fridge/freezer	U170X056P17161AA	FRIDGE/FREEZER UNIT 170/56L FLAT EVAPORATOR 815x210mm 12/24V DC ITC (2012)	ITC

# Water-cooled SP

## Cooling Unit BD35F base

Select your control



Mechanical



ITC



SEC




SPECIFICATIONS	
Evaporator	L
Max. Box Volume Fridge (l)	100



CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U100X000L11311AA	FRIDGE UNIT 100L SP "L" BENT EVAPORATOR 250+110x350mm 12/24V DC (2057)	Mechanical

SPECIFICATIONS	
Evaporator	Flat
Max. Box Volume Fridge (l)	170
Max. Box Volume Freezer (l)	56

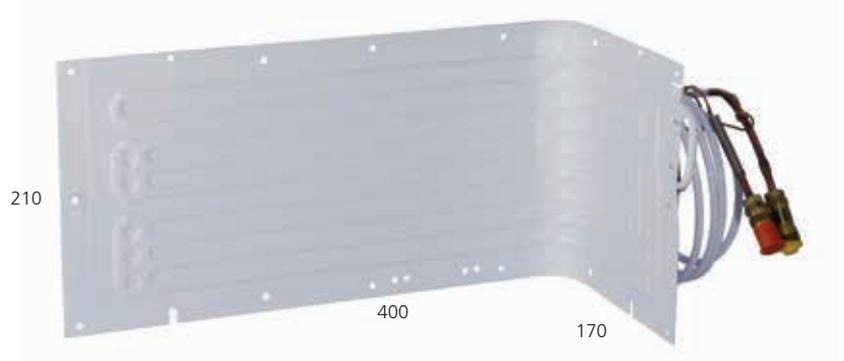

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U125X000L11311AA	FRIDGE UNIT 125L SP "L" BENT EVAPORATOR 400+170x210mm 12/24V DC (2050)	Mechanical
Freezer	U000X041L13311AA	FREEZER UNIT 41L SP "L" BENT EVAPORATOR 400+170x210mm 12/24V DC (2050)	Mechanical

SPECIFICATIONS	
Evaporator	O
Max. Box Volume Fridge (l)	125



CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U125X000R11311AA	FRIDGE UNIT 125L SP OVAL EVAPORATOR 4L 240x210x85mm 12/24V DC (2051)	Mechanical

# Water-cooled SP

## Cooling Unit BD35F base

Select your control



Mechanical



ITC



SEC

175




160

280



### SPECIFICATIONS

Evaporator	O
Max. Box Volume Fridge (l)	150

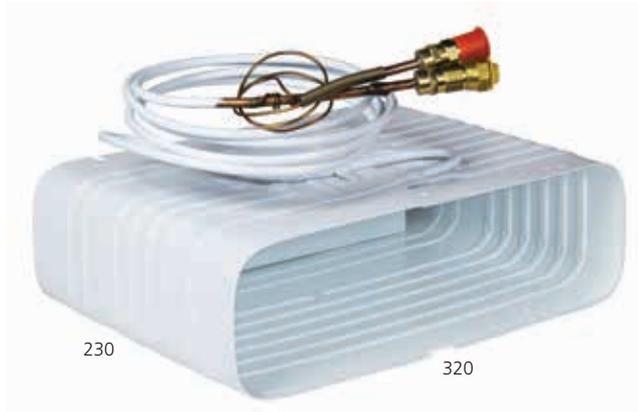

230

320


100

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge	U150X000R11311AA	FRIDGE UNIT 150L SP OVAL EVAPORATOR 7,5L 320x100x230mm 12/24V DC (2351)	Mechanical

# Water-cooled Magnum

## Cooling Unit BD50F base

Select your control

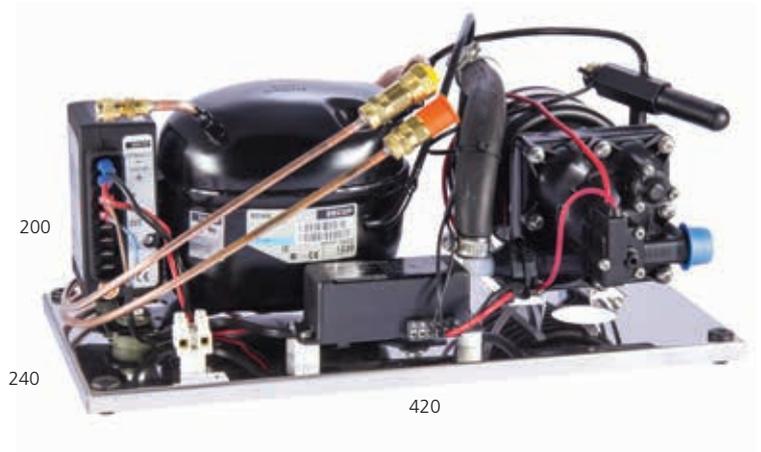

SPECIFICATIONS	
Evaporator	O
Max. Box Volume Fridge (l)	200
Max. Box Volume Freezer (l)	66



CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge/freezer	U200X066R12411AA	FRIDGE/FREEZER UNIT 200L/66L MAGNUM OVAL EVAPORATOR 14L 380x140x270mm 12/24V DC DUAL (2505)	Dual

SPECIFICATIONS	
Evaporator	Flat
Max. Box Volume Fridge (l)	260
Max. Box Volume Freezer (l)	86



CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge/freezer	U260X086P12411AA	FRIDGE/FREEZER UNIT 260L/86L MAGNUM FLAT EVAPORATOR 1000x270mm 12/24V DC DUAL (2513)	Dual

SPECIFICATIONS	
Evaporator	Flat
Max. Box Volume Fridge (l)	400
Max. Box Volume Freezer (l)	133



CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Fridge/freezer	U260X086P12411AA	FRIDGE/FREEZER UNIT 400L/133L MAGNUM FLAT EVAPORATOR 1370x300mm 12/24V DC DUAL (2507)	Dual

# Water-cooled Magnum

## Cooling Unit BD80F base

Select your control




Mechanical



ITC



SEC

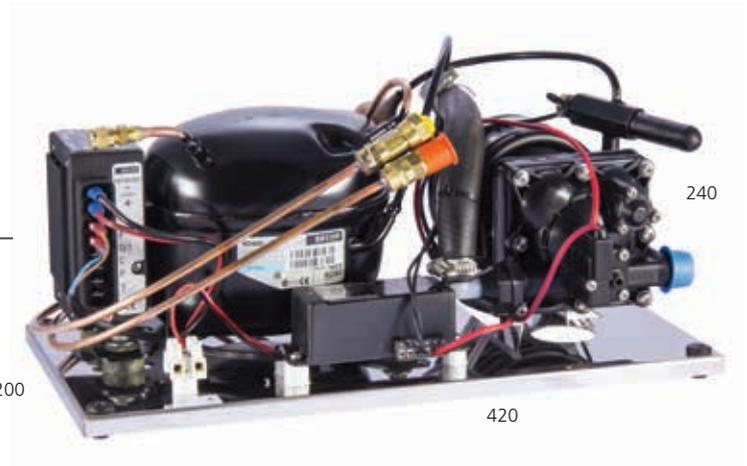


200

420

240

### SPECIFICATIONS

Evaporator	Flat
Max. Box Volume Freezer (l)	141

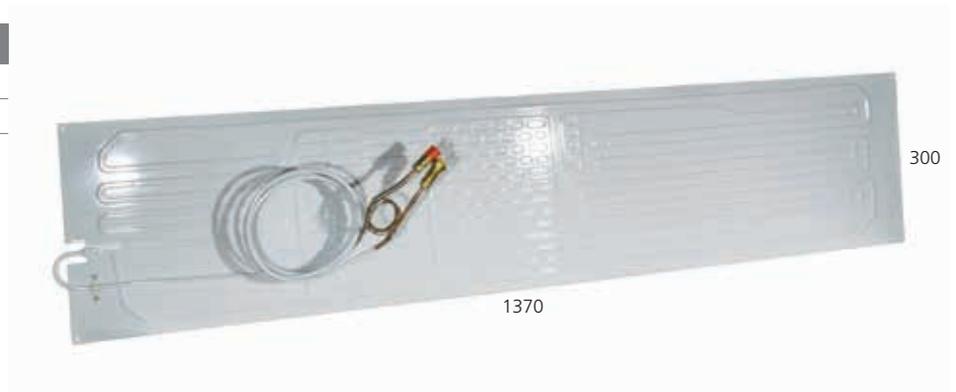

1370

300

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Freezer	U000X141P13411AA	FREEZER UNIT 141L MAGNUM FLAT EVAPORATOR 1370x300mm 12/24V DC (2607)	Mechanical

### SPECIFICATIONS

Evaporator	Flat
Max. Box Volume Freezer (l)	200



1500

460

CATEGORY	UNIT CODE	DESCRIPTION	CONTROL
Freezer	U000X200P13411AA	FREEZER UNIT 200L MAGNUM FLAT EVAPORATOR 1500x460mm 12/24V DC (2609)	Mechanical

# Cooling Unit ITC+

## Air-Cooled

### SPECIFICATIONS

Plate	2L
Max. Box Volume Fridge (l)	100
Max. Box Volume Freezer (l)	35



CATEGORY	UNIT CODE	COMPRESSOR	DESCRIPTION	CONTROL
Fridge/freezer	U100X035A17161AA	BD35F	FRIDGE/FREEZER UNIT 100L/35L HOLDING PLATE 2L 12/24V DC ITC+ (3201)	ITC+

### SPECIFICATIONS

Plate	3L
Max. Box Volume Fridge (l)	150
Max. Box Volume Freezer (l)	50



CATEGORY	UNIT CODE	COMPRESSOR	DESCRIPTION	CONTROL
Fridge/freezer	U150X050A17161AA	BD50F	FRIDGE/FREEZER UNIT 150L/50L HOLDING PLATE 3L 12/24V DC ITC+ (3701)	ITC+

### SPECIFICATIONS

Plate	6L
Max. Box Volume Fridge (l)	200
Max. Box Volume Freezer (l)	65



CATEGORY	UNIT CODE	COMPRESSOR	DESCRIPTION	CONTROL
Fridge/freezer	U200X065A17161AA	BD50F	FRIDGE/FREEZER UNIT 200L/65L HOLDING PLATE 6L 12/24V DC ITC+	ITC+

# Cooling Unit ITC+

## Water Cooled SP

### SPECIFICATIONS

Plate	2L
Max. Box Volume Fridge (l)	100
Max. Box Volume Freezer (l)	35



CATEGORY	UNIT CODE	COMPRESSOR	DESCRIPTION	CONTROL
Fridge/freezer	U100X035A17361AA	BD35F	FRIDGE/FREEZER 100L/35L SP HOLDING PLATE 2L 12/24V DC ITC+ (3251)	ITC+

### SPECIFICATIONS

Plate	3L
Max. Box Volume Fridge (l)	150
Max. Box Volume Freezer (l)	50



CATEGORY	UNIT CODE	COMPRESSOR	DESCRIPTION	CONTROL
Fridge/freezer	U150X050A17361AA	BD50F	FRIDGE/FREEZER UNIT 150L/50L SP HOLDING PLATE 3L 12/24 ITC+ (3751)	ITC+

### SPECIFICATIONS

Plate	6L
Max. Box Volume Fridge (l)	150
Max. Box Volume Freezer (l)	50



CATEGORY	UNIT CODE	COMPRESSOR	DESCRIPTION	CONTROL
Fridge/freezer	U200X065A17361AA	BD50F	FRIDGE/FREEZER UNIT 200L/65L SP HOLDING PLATE 6L 12/24 ITC+	ITC+

# Cooling Unit ITC+

## Water Cooled Magnum

### SPECIFICATIONS

Plate	3L
Max. Box Volume Fridge (l)	150
Max. Box Volume Freezer (l)	50



CATEGORY	UNIT CODE	COMPRESSOR	DESCRIPTION	CONTROL
Fridge/freezer	U150X050A17461AA	BD50F	FRIDGE/FREEZER UNIT 150L/50L MAGNUM HOLDING PLATE 3L 12/24 DC ITC+ (4201)	ITC+

### SPECIFICATIONS

Plate	6L
Max. Box Volume Fridge (l)	150
Max. Box Volume Freezer (l)	50



CATEGORY	UNIT CODE	COMPRESSOR	DESCRIPTION	CONTROL
Fridge/freezer	U200X065A17461AA	BD50F	FRIDGE/FREEZER UNIT 200/65L MAGNUM HOLDING PLATE 6L 12/24 DC ITC+ (4701)	ITC+

# Special Design

## Refrigerators and Freezers

---

For perfect integration into the interior design of the boat, Indel Webasto Marine products must offer a high level of customization options. This aspect allows for unusual installations and extraordinary design.

Projects are executed in close cooperation with customers. Indel Webasto Marine conducts a comprehensive study to determine the technical requirements.



**Customized solutions to fit  
any size, shape and demand!**



Indel Webasto Marine offers tailored refrigeration and freezer solutions to meet customer needs even on very complex projects. The project is realized in close cooperation between the shipyard and Indel Webasto Marine. Indel Webasto Marine conducts a complete study to determine the best solution which fits both economic and technical constraints. Do not hesitate to contact us for more detailed information.

### Product Specifications:

- Completely tailored solutions
- Overall compatibility with the boat's interior design
- The custom-built approach in the product study assures an easy installation of the unit as well as an excellent effect on board
- Production technology is chosen according to the customer's request (small quantity, glass fiber boxes, high quantity, rotomoulding technology)





## Produce fresh ice on board

Serving drinks on board is great. But being able to serve them with ice cubes is even better. Indel Webasto Marine now provides boat owners with the perfect solutions to produce fresh ice on board.

## Ice Makers

<b>IceDrink</b>	<b>92</b>
IceDrink Clear	92
IceDrink Clear WT	92
<hr/>	
<b>IceMaker</b>	<b>93</b>
IceMaker White	93
IceMaker White WT	93
IceMaker White Inox	93
IceMaker White Low Profile	93
<hr/>	
IceMaker White BI29	93

# Ice Makers

## IceDrink Clear, IceDrink Clear WT

Serving cool drinks on board is great. Indel Webasto Marine now provides boat owners with the perfect solutions to produce fresh ice on board. What's more, by offering different models with different technologies, customers can choose between clear ice and white ice.

The White ice makers, thanks to the combination of the refrigerated cabinet which maintains frozen ice cubes and the exclusive designed condensing ventilation, are ideal for installations in hot climate conditions.

The Clear Ice Maker, thanks to the exclusive Spray technology is capable to produce a large amount of ice cubes up to 18 kg per day. It has the best production capacity ratio of the market, providing high quality ice cubes, compact & crystalline ideal for your cocktail and drinks. It is available as option with an integrated water tank (WT) for the direct supply of mineral water.



### Convincing facts for the Isotherm IceDrink Clear:

- Complete stainless steel design
- Production capacity of 18 kg per day
- Spray technology for clear ice
- Available both in 115 V 60 Hz and 230 V 50 or 60 Hz
- Quality cubes: compact, cold and crystalline that drop into the collection bin, (not refrigerated), meeting the ice requirements even at peak demand times
- Front to rear ventilation
- Three sides flange option for critical space installations

### Convincing facts for the Isotherm IceDrink Clear WT:

- Integrated water tank, for the supply of mineral water
- Same external dimensions of the standard Clear Ice version
- Easy to refill, simply by opening the front lid pouring water in the dedicated container



# Ice Makers

IceMaker White, IceMaker White WT,  
IceMaker White Low Profile



## Convincing facts for the Isotherm IceMaker White:

- Available in stainless steel or with white door
- Production capacity of 8 kg per day
- Reliable white ice technology
- Various customization possibilities for different installations just like with the CRUISE classic fridges and freezers
- Front ventilation only
- Refrigerated collection bin to keep the ice cubes frozen

## Convincing facts of the Isotherm White Ice WT:

- Stainless Steel door in Inox Clean Touch, anti-finger print treated
- Up to 4,6kgs day of ice cubes production
- Removable water tank, easy to clean and refill
- Genuine AC/DC solution, capable to either produce ice and maintain in both operating conditions
- Automatic low power setting mode in DC
- External led indicator of empty water tank



## Convincing facts for the Isotherm IceMaker White Low Profile:

- Rear position compressor for a low height profile Ice Maker
- Reliable performing technology, ice production 8 kg per day
- Refrigerated cabinet to store and maintain frozen ice cubes
- High quality stainless steel for outer cockpit applications
- Refined flush installation thanks to a flush 3 sides mounting frame with the 4th one as option
- Exclusive designed condensing forced ventilation to grant maximum performances in hot conditions
- Extra compact dimensions in height
- Ideal for installation in critical areas where the height is limited


# Ice Makers

## IceMaker White BI29

### Convincing facts for the Isotherm

#### IceMaker White BI29:

- Sturdy built in design casing
- Refrigerated cabinet to store and maintain frozen ice cubes
- Stainless steel inner-lining and plastic bottom section
- Ice-production capacity of 4 kg per day
- Extra low profile, to easily fit in cockpit applications or below seats
- Equipped with extra-long roller slides, to use the box as a drawer

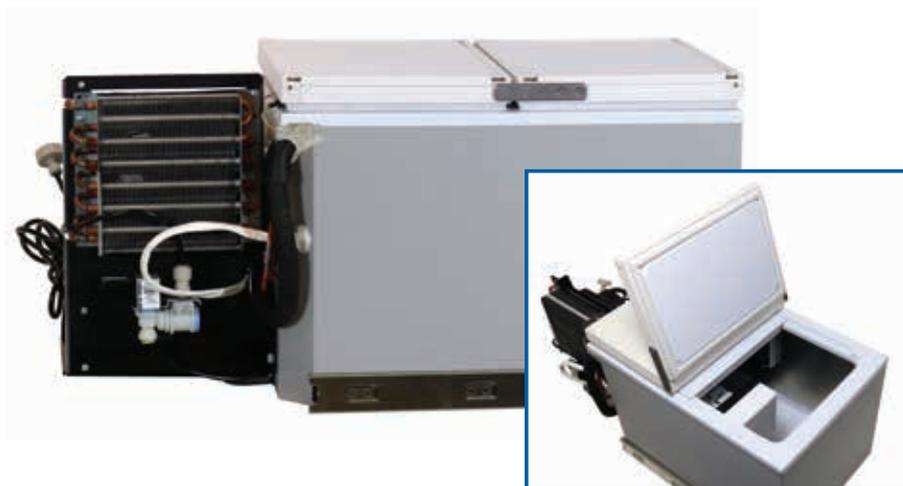

### Product Overview: Isotherm IceDrink Ice Makers

Type	Gross volume (l)	Dimensions W x H x D (mm)	Weight (kg)	Power consumption (Watt)	Power Supply (Volt /Hz)
IceDrink Clear	4	354 x 590 x 407	29	320	230 V AC - 50Hz or 115 V AC - 60 Hz
IceDrink Clear WT	4	354 x 590 x 407	29	320	230 V AC - 50Hz or 115 V AC - 60 Hz
IceMaker White, White Door	12	355 x 630 x 420*	26	180	230 V AC - 50 Hz
IceMaker White WT	12	375 x 630 x 600**	30	200	DC/AC 12V or 24V 230 V - 50 Hz or 115 V - 60 Hz
IceMaker White Inox	12	375 x 630 x 460**	27	180	230 V AC - 50 Hz
IceMaker White Low Profile	12	370 x 475 x 630	26	180	230 V AC - 50Hz or 115 V AC - 60 Hz
IceMaker White BI29	14	363 x 375 x 730	26	180	230 V AC - 50Hz or 115 V AC - 60 Hz

\* Door thickness (to be added): 440 mm

\*\* Width IceMaker White Inox frame 20 mm per side

TYPE	ORDER NUMBER	DESCRIPTION
IceDrink Clear	5S21A11A0N000	ICE DRINK CLEAR 230V/50HZ
	5S21A14A0N000	ICE DRINK CLEAR 115V/60HZ
IceDrink Clear WT	5S18A11A0T000	ICE DRINK CLEAR WT 230V/50HZ
	5S18A14A0T000	ICE DRINK CLEAR WT 115V/60HZ
Ice Maker White Ice	5W08A21CGN000	ICE MAKER WHITE WHITE DOOR 230V/50Hz
	5W08A24CEN001	ICE MAKER WHITE WHITE DOOR 115V/60Hz
	5W08A11IMN000	ICE MAKER WHITE INOX 230V/50Hz
	5W08A14IMN000	ICE MAKER WHITE INOX 115V/60Hz
	5W08L11IMN000	ICE MAKER WHITE LOW PROFILE INOX 230V/50Hz
	5W08L14IMN000	ICE MAKER WHITE LOW PROFILE INOX 115V/60Hz
Ice Maker White Ice WT	5W08A11IMT000	ICE MAKER WHITE INOX WT 230V/50Hz
	5W08A14IMT000	ICE MAKER WHITE INOX WT 115V/60Hz
BI29 Ice Maker	5W29A21CAN000	ICE MAKER WHITE BI29 230V/50Hz
	5W29A24CAN000	ICE MAKER WHITE BI29 115V/60Hz





## Serve wine or champagne at the perfect temperature

Indel Webasto Marine offers its customers the opportunity to have wine cooler and cellars on board. This high class equipment enables boat owners to serve and store great wine or champagne at the perfect temperature.

# Wine Cellars & Cooler

## Wine Cooler

Divino The One	98
Divino The Eight	98

---

## Wine Cellar

Divino 23	99
Divino 35	99

# Divino Wine Cellars & Cooler

## Divino The One - Divino The Eight

Serve great wine or champagne.

### Divino The One

Divino The One is an integrated wine cooler that keeps wine perfectly chilled during service. It's extremely simple to use: just touch any part of the crown with your finger to activate your Divino The One. Touch and serve your wine always at the right temperature.

The Divino The One is based on a powerful thermoelectric core unit that creates an instant cold air jacket around the bottle.

Once integrated, the only visible part will be the stainless steel crown, capable to match the typical marine-style applications.

### Using it will make your wine tasting more fun!

Tap the crown three times and scroll through the colour selection of 27 options to personalize it.

By tapping four times the crown, the illumination will gently fade through the full colour selection.

- Perfect serving temperature for your wine
- Elegant integrated design
- Jacket of cold air: no more wet bottles and water stains
- Performing and reliable: 3 years warranty, maintenance free

### Divino The Eight

The new Divino The Eight is a premium wine storage device, capable to welcome up to 8 bottles of wine. It is a wine cellar DC 12/24V based, with the optional of Isotherm AC/DC Power Pack for multiple purposes.

Its glass-based transparent door and the 3 sides flush mounting flange in stainless steel allow the best on board integration: A specific locking mechanism prevents unwanted opening of the door in rough seas.



### Convincing factors of the Divino The Eight:

- Elegant and practical design, double glass chamber sealed door DC based
- Exclusive stainless steel bottle rack, to store 4 bottles in two rows (8 bottles in total)
- Interior LED light
- Custom temperature settings for white or red wine



### The One - a brief tour

#### 1. Smart-touch crown

- Control with just a touch
- Crafted from stainless steel
- Seamless edge-to-edge curve
- Polished to a mirror finish (not plated)
- No buttons or displays needed

#### 2. Interactive LED lighting

- 27 colours
- Select colour using touch
- Option to use without light
- Colour fade mode

#### 3. Bottom threaded ring included in the supply

#### 4. Simple installation

- Ideal for inner and outer cockpit application
- Does not require specialist installation
- Install into a 154 mm hole
- Super compact: 160 mm wide, 300 mm deep
- Low power, uses only 60 W
- 12V DC as standard, Isotherm AC/DC power supply ready for AC application

#### 5. Patented Kryolux™ Technology

- Completely dry cooling
- No ice, water, CFCs or other refillables
- Caters for extra wide 75 cl bottles
- Automatic standby after 2 hours
- Runs silently



# Divino Wine Cellars & Cooler

## Divino 23, Divino 35



### Divino 23 & Divino 35: safe on board storage for wine and champagne.

Both 23 and 35 bottle wine cellars can be built into the dressers or columns of modular furniture with no modification of its design.

For a perfect integration, the profile of the door is totally lined up with the doors of the furniture.

Both models feature double door locking systems to prevent unwanted door opening in rough seas and special racks designed for storing champagne bottles.

- Sturdy metal casing
- Robust handle
- Big storage room for 23 or 35 bottles
- Additional door lock included in the supply

### Enjoy the pure luxury of storing wine or champagne at the perfect temperature:

- Built-In wine cellars for 23 or 35 bottles
- No aeration grills needed
- Profile of the door totally lined up with the doors of the furniture
- Interior light



Divino 23



Divino 35

### Product Overview: DIVINO Wine Cellars & Cooler

	Divino The One	Divino The Eight <sup>(1)</sup>	Divino WC 23	Divino WC 35
Capacity	1 bottles	8 bottles	23 (27 max.) <sup>2</sup> bottles	35 (45 max.) <sup>2</sup> bottles
Internal shelves	–	2	3 wooden	5 wooden
Size in mm (W x H x D)	152 x 300 x ø 160	510 x 571 x 491	560 x 455 x 550	560 x 680 x 550
Dimensions door in mm (W x H)	–	–	588 x 460	588 x 715
Weight (kg)	1,960	25,5	36	38
Power installed	60 Watt - 12V ONLY	60 Watt - 12/24 Volt	230 V 120 Watt - 115 V 120 Watt	230 V 120 Watt - 115 V 120 Watt
Cooling system	Thermoelectric	BD35F	Compressor CFC – free	Compressor CFC – free
Electronic thermostat	Self Regulation	1	1	1
Temperature	Mono	For White or red wine	Mono	Mono
Internal light	27 Colour Option	Yes Led	Yes	Yes

1. Isotherm Power Pack available for AC/DC application - 2. 27 or 45 bottles if all the wooden shelves are removed from the wine cellar.

TYPE	ORDER NUMBER	DESCRIPTION
Divino The One	7N01TG9UP0000	DIVINO THE ONE 12V DC
Divino The Eight	7N08AA1CJ0000	WINE CELLAR DIVINO THE 8 12/24V
Wine Cellar 23	7N23AA5AJ0000	WINE CELLAR 23 220V/50Hz 23
	7N23AA6AJ0000	WINE CELLAR 23 110V/60Hz 23
Wine Cellar 35	7N35AA5AJ0000	WINE CELLAR 35 220V/50Hz 35
	7N35AA6AJ0000	WINE CELLAR 35 115V/60Hz 35



## Ensure warm water supply on board

Isotemp water heaters are specifically designed for use on yachts and boats. Only high quality components are chosen to ensure the best product performance. The marine water heaters are very robust and highly insulated to keep warm water available at all times and under all circumstances.

# Water heaters

## **BASIC**

Basic 24, 30, 40, 50, 75 102

---

## **SLIM**

Slim 15, 20, 25 102

---

## **SQUARE**

Square 16 102

---

## **SPA**

Spa 15, 20, 25, 30, 40, 50, 60 104

---

# Marine Water Heaters

## Basic, Slim and Square Range

Isotemp water heaters are specifically designed for use on yachts and boats. Only high quality components are chosen to ensure the best product performance.

### Isotemp Water Heaters Slim and Basic

Isotemp premium water heater comes with brushed stainless steel cover as well as innovative internal design. It achieves highest capacity by optimized installation of the engine water heat exchanger as well as the immersion heater. They are positioned in the lowest part of the tank where the water is coldest in order to ensure an equal heating of all the water in the tank. The water in and outlets are especially designed to minimize the mixture of cold and hot water.

Indel Webasto Marine introduces two water boilers. These units are equipped with a specific, anti-flare 115 V/750 W or 230 V/750 W heating element which is applied, for time being, on two models of our range: Basic 24 L and Slim 25 L. Anti-flare water heaters are necessary if their installation is foreseen in engine rooms of boats with gasoline engines.



- Robust design
- Water tank in stainless steel
- 5 years limited warranty on water tank
- External cylinder in stainless steel
- Stable fixing feet in stainless steel
- 360° adjustable mounting for easy installation also on bulkhead

### Product Specifications:

- Extra long, corrugated coils for high heat exchange efficiency
- Special 7.0 bar/100 psi safety valve: simple winter drain
- Ultra-thick insulation for lowest temperature loss
- Electrical plug and play immersion heating element, especially designed to heat also the water at the bottom of the tank
- Thermostat mixing valve (optional on Square water heaters)
- 750 W immersion heating element as standard; 1200 W available as an option only for Slim 20 and 25, Basic 40, 50 and 75
- 2000 W heating element is available as an option only for Slim 25, Basic 50 and 75. It is compatible on 230 V versions only

## Product overview: Marine Water Heaters

Article Number	Type	Gross volume (l)	Dimension* L x Ø D (mm)	Weight (kg)	Rated pressure (bar)	Heating element (V)	Nominal power (W)
601531S000003	Slim 15	15	520 x 295	9.0	7.0	230	750 std
						115	750 std
602031S000003	Slim 20	20	645 x 295	10.5	7.0	230	750 std or 1200
						115	750 std or 1200
602531S000003	Slim 25	25	765 x 295	12.0	7.0	230	750 std or 1200 or 2000
						115	750 std or 1200
602431B000003	Basic 24	24	470 x 395	12.5	7.0	230	750 std
						115	750 std
603031B000003	Basic 30	30	535 x 395	13.5	7.0	230	750 std
						115	750 std
604031B000003	Basic 40	40	640 x 395	15.5	7.0	230	750 std or 1200
						115	750 std or 1200
605031B000003	Basic 50	50	760 x 395	17	7.0	230	750 std or 1200 or 2000
						115	750 std or 1200
607531B000003	Basic 75	75	1050 x 395	24.5	7.0	230	750 std or 1200 or 2000
						115	750 std or 1200
<b>Square</b>			<b>Dimension W xH x D (mm)</b>				
601631QX00003	Square 16	16	400 x 560 x 180	15.5	5.0	230	750 std
						115	750 std
<b>Double coil</b>			<b>Dimension L x Ø D (mm)</b>				
602431BD00003	Basic 24	24	470 x 395	13.0	7.0	230	750 std
						115	750 std
604031BD00003	Basic 40	40	640 x 395	16.0	7.0	230	750 std or 1200
						115	750 std or 1200
607531BD00003	Basic 75	75	1050 x 395	25.0	7.0	230	750 std or 1200 or 2000
						115	750 std or 1200

\* Including thermostat mixing valve

\*\* Immersion heater 115 V/ 750 W and 115 V/ 1200 W also available. Material: Tank, engine water coil and all connections AISI 316; Outside cover and mounting feet: AISI 304; Electric immersion heater: Copper covered by Nickel; Insulation: Polyurethane; Water connections: 1/2" inside and outside NPT and BSP pipe thread. Changes of the specification may be done without prior notice

# Marine Water Heaters

## The Spa range



The Isotemp Spa boilers are available in seven different sizes ranging from 15 to 60 liters capacity. They match high marine quality standards such as a stainless steel inner tank, a robust polypropylene casing and a 6 bar safety valve.

### High Marine quality standards and optimized cost/quality ratio!

- 7 different sizes from 15 to 60 liters capacity
- AISI 316 inner tank
- 5 years limited warranty on water tank
- 6 bar safety valve
- Optional mixing valve
- Extra thick insulation for high performance
- Outer casing made of high quality polypropylene
- Customisable with valves, voltage and nominal power of the heating element
- Water connections: 1/2"



### Product overview: Marine Spa boilers

Article number	Type	Gross volume (l)	Dimension (Ø x L) (mm)	Weight (kg)	Rated pressure (bar)	Heating element (V)	Nominal power (W)
6P1531SPA0003	Spa 15	15	310 x 450±5	7,5	6	230	750 std
						115	750 std
6P2031SPA0003	Spa 20	20	310 x 550±5	9	6	230	750 std
						115	750 std
6P2531SPA0003	Spa 25	25	310 x 650±5	10	6	230	750 std or 1200
						115	750 std or 1200
6P3031SPA0003	Spa 30	30	390 x 535±5	12	6	230	750 std
						115	750 std
6P4031SPA0003	Spa 40	40	390 x 640±5	14	6	230	750 std or 1200
						115	750 std or 1200
6P5031SPA0003	Spa 50	50	392 x 745±5	15,5	6	230	750 std or 1200 or 2000
						115	750 std or 1200
6P6031SPA0003	Spa 60	60	392 x 850±5	17,6	6	230	750 std or 1200 or 2000
						115	750 std or 1200

## Boilers with mixing valve

TYPE	ARTICLE NUMBER	DESCRIPTION
Basic 24	602431B000003	WATER HEATER BASIC 24L 230V/750W - MIXING VALVE
Basic 30	603031B000003	WATER HEATER BASIC 30L 230V/750W - MIXING VALVE
Basic 40	604031B000003	WATER HEATER BASIC 40L 230V/750W - MIXING VALVE
Basic 50	605031B000003	WATER HEATER BASIC 50L 230V/750W - MIXING VALVE
Basic 75	607531B000003	WATER HEATER BASIC 75L 230V/750W - MIXING VALVE
<b>SQUARE</b>		
Square 16	601631QX00003	WATER HEATER SQUARE 16L 230V/750W - MIXING VALVE
<b>DOUBLE COIL</b>		
Basic 24	602431BD00003	WATER HEATER BASIC 24L DOUBLE COIL 230V/750W - MIXING VALVE
Basic 40	604031BD00003	WATER HEATER BASIC 40L DOUBLE COIL 230V/750W - MIXING VALVE
Basic 75	607531BD00003	WATER HEATER BASIC 75L DOUBLE COIL 230V/750W - MIXING VALVE
<b>SPA</b>		
Spa 15	6P1531SPA0003	WATER HEATER SPA 15L SPA 230V/750W - MIXING VALVE
Spa 20	6P2031SPA0003	WATER HEATER SPA 20L SPA 230V/750W - MIXING VALVE
Spa 25	6P2531SPA0003	WATER HEATER SPA 25L SPA 230V/750W - MIXING VALVE
Spa 30	6P3031SPA0003	WATER HEATER SPA 30L SPA 230V/750W - MIXING VALVE
Spa 40	6P4031SPA0003	WATER HEATER SPA 40L SPA 230V/750W - MIXING VALVE
Spa 50	6P5031SPA0003	WATER HEATER SPA 50L SPA 230V/750W - MIXING VALVE
Spa 60	6P6031SPA0003	WATER HEATER SPA 60L 230V/750W - NO MIXING VALVE





## **Isotherm Air Heater – the perfect defrosting solution**

The air heater provides defrost power with radial fans and three power steps. It transfers the surplus of heat coming from the engine to defrost as well as to heat the cabin.

## Air Heat Exchangers

Air Heat Exchangers

105

# Air Heat Exchangers


The Air Heat Exchanger transfers the surplus heat coming from the engine using it to defrost as well as to heat the cabin. It has a radial fan with three power steps. It is equipped with four 60 mm hose brackets for the warm air distribution.




- Four outlets with Ø 60 mm
- The air intake can be canalized with hose adapters
- Fan speed regulation
- 12 or 24 V versions available
- Casing in stainless steel
- High heat output of 10 kW
- High temperature resistant components

## Product overview: Air Heat Exchangers

Article number	Heat output (kW)	Dimension W x H x D (mm)	Volt (V)	Water pressure (bar)	Water hose connection (mm - ")	Weight (kg)	Power consumption (W)			Air-flow (m <sup>3</sup> /H)
							Low	Medium	High	
6D03A1DH00000	10	450 x 135 x 300	12	2.5	16 - 5/8	5,5	45	54	84	Up to 500
6D04B1DH00000	10	450 x 135 x 300	24	2.5	16 - 5/8	5,5	45	54	84	Up to 500

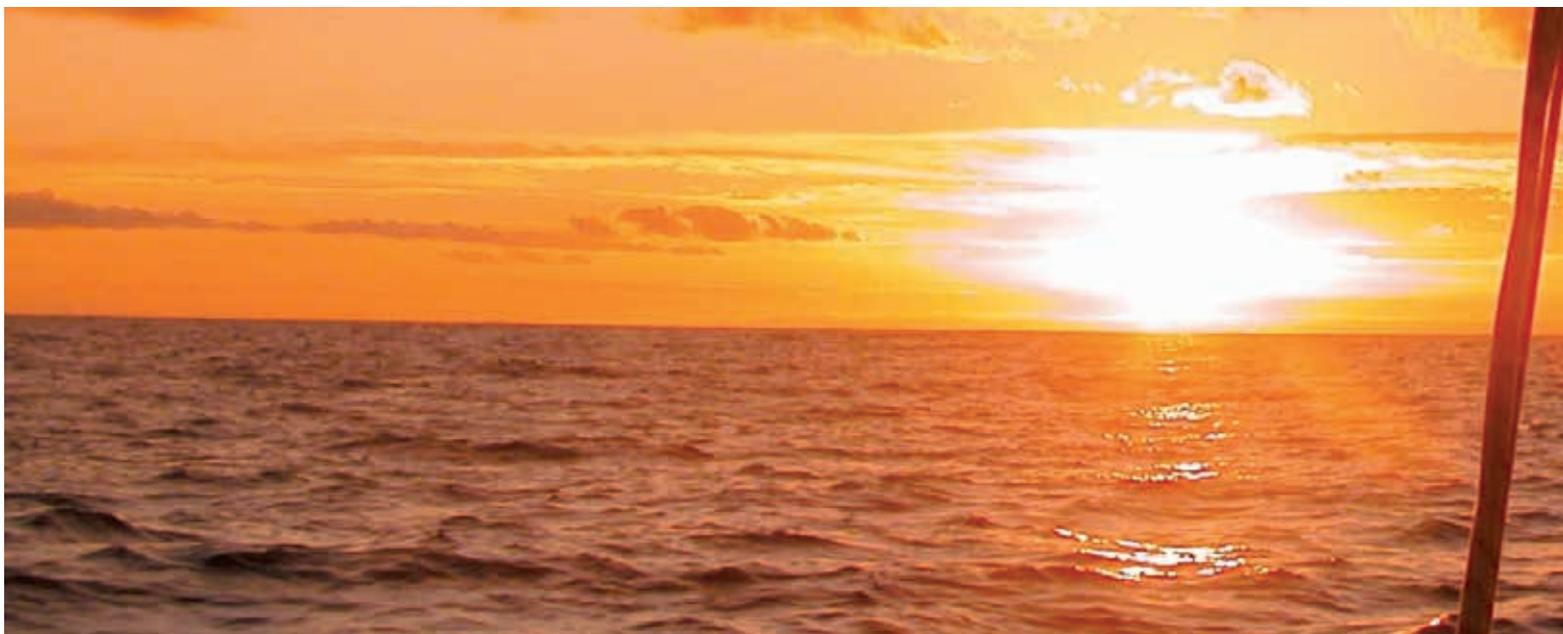

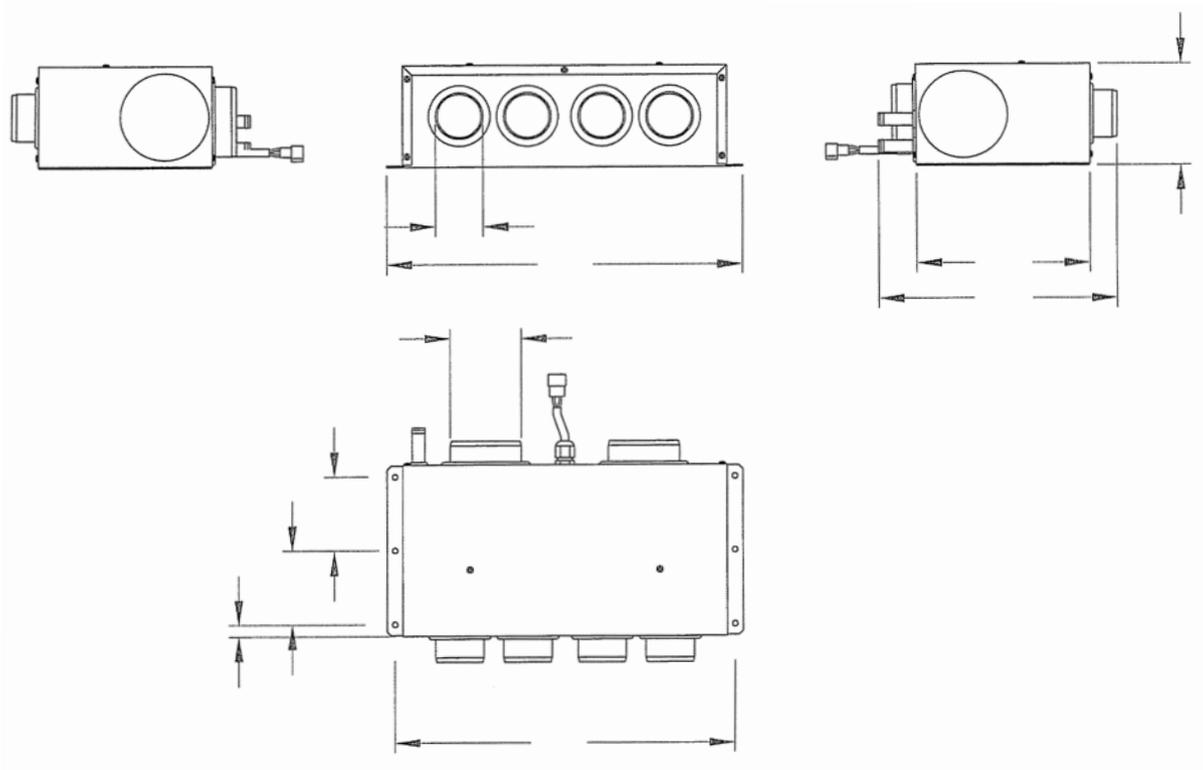

### Air Heat Exchangers

ARTICLE NUMBER	DESCRIPTION
6D03A1DH00000	ISOTHERM AIR HEATER 10kW 12V
6D04B1DH00000	ISOTHERM AIR HEATER 10kW 24V





## Ensure security on board

Boat owners using sophisticated and expensive, most technical equipment, create an increasing demand for security on board. On board safes ensure on board security.

## On Board Safes

Safe 10 110

---

Safe 30 110

---

# On Board Safes

Boat owners using sophisticated and expensive, most technical equipment, create an increasing demand for security on board. On board safes ensure on board security. The Isotherm safes are produced in painted steel and available in two sizes. The larger model (Safe 30) is big enough to store a laptop computer. The smaller model (Safe 10) is sufficiently large to store smaller size electronics.




Safe 30

Safe 10

- Steel painted with highly resistant grey coating
- Control panel integrated flush with the door
- Three independent locking systems  
(code number, mechanical, electronic key)
- Robust design
- Plenty of space inside

## Product overview: On Board Safes

Article number	Type	Dimension W x H x D (mm)	Weight (kg)
7F10000A00000	Safe 10 Safe security box small painted, flush door	300 x 170 x 231	5.85
7F30000A00000	Safe 30 Safe security box big painted, flush door	431 x 221 x 350	12.3

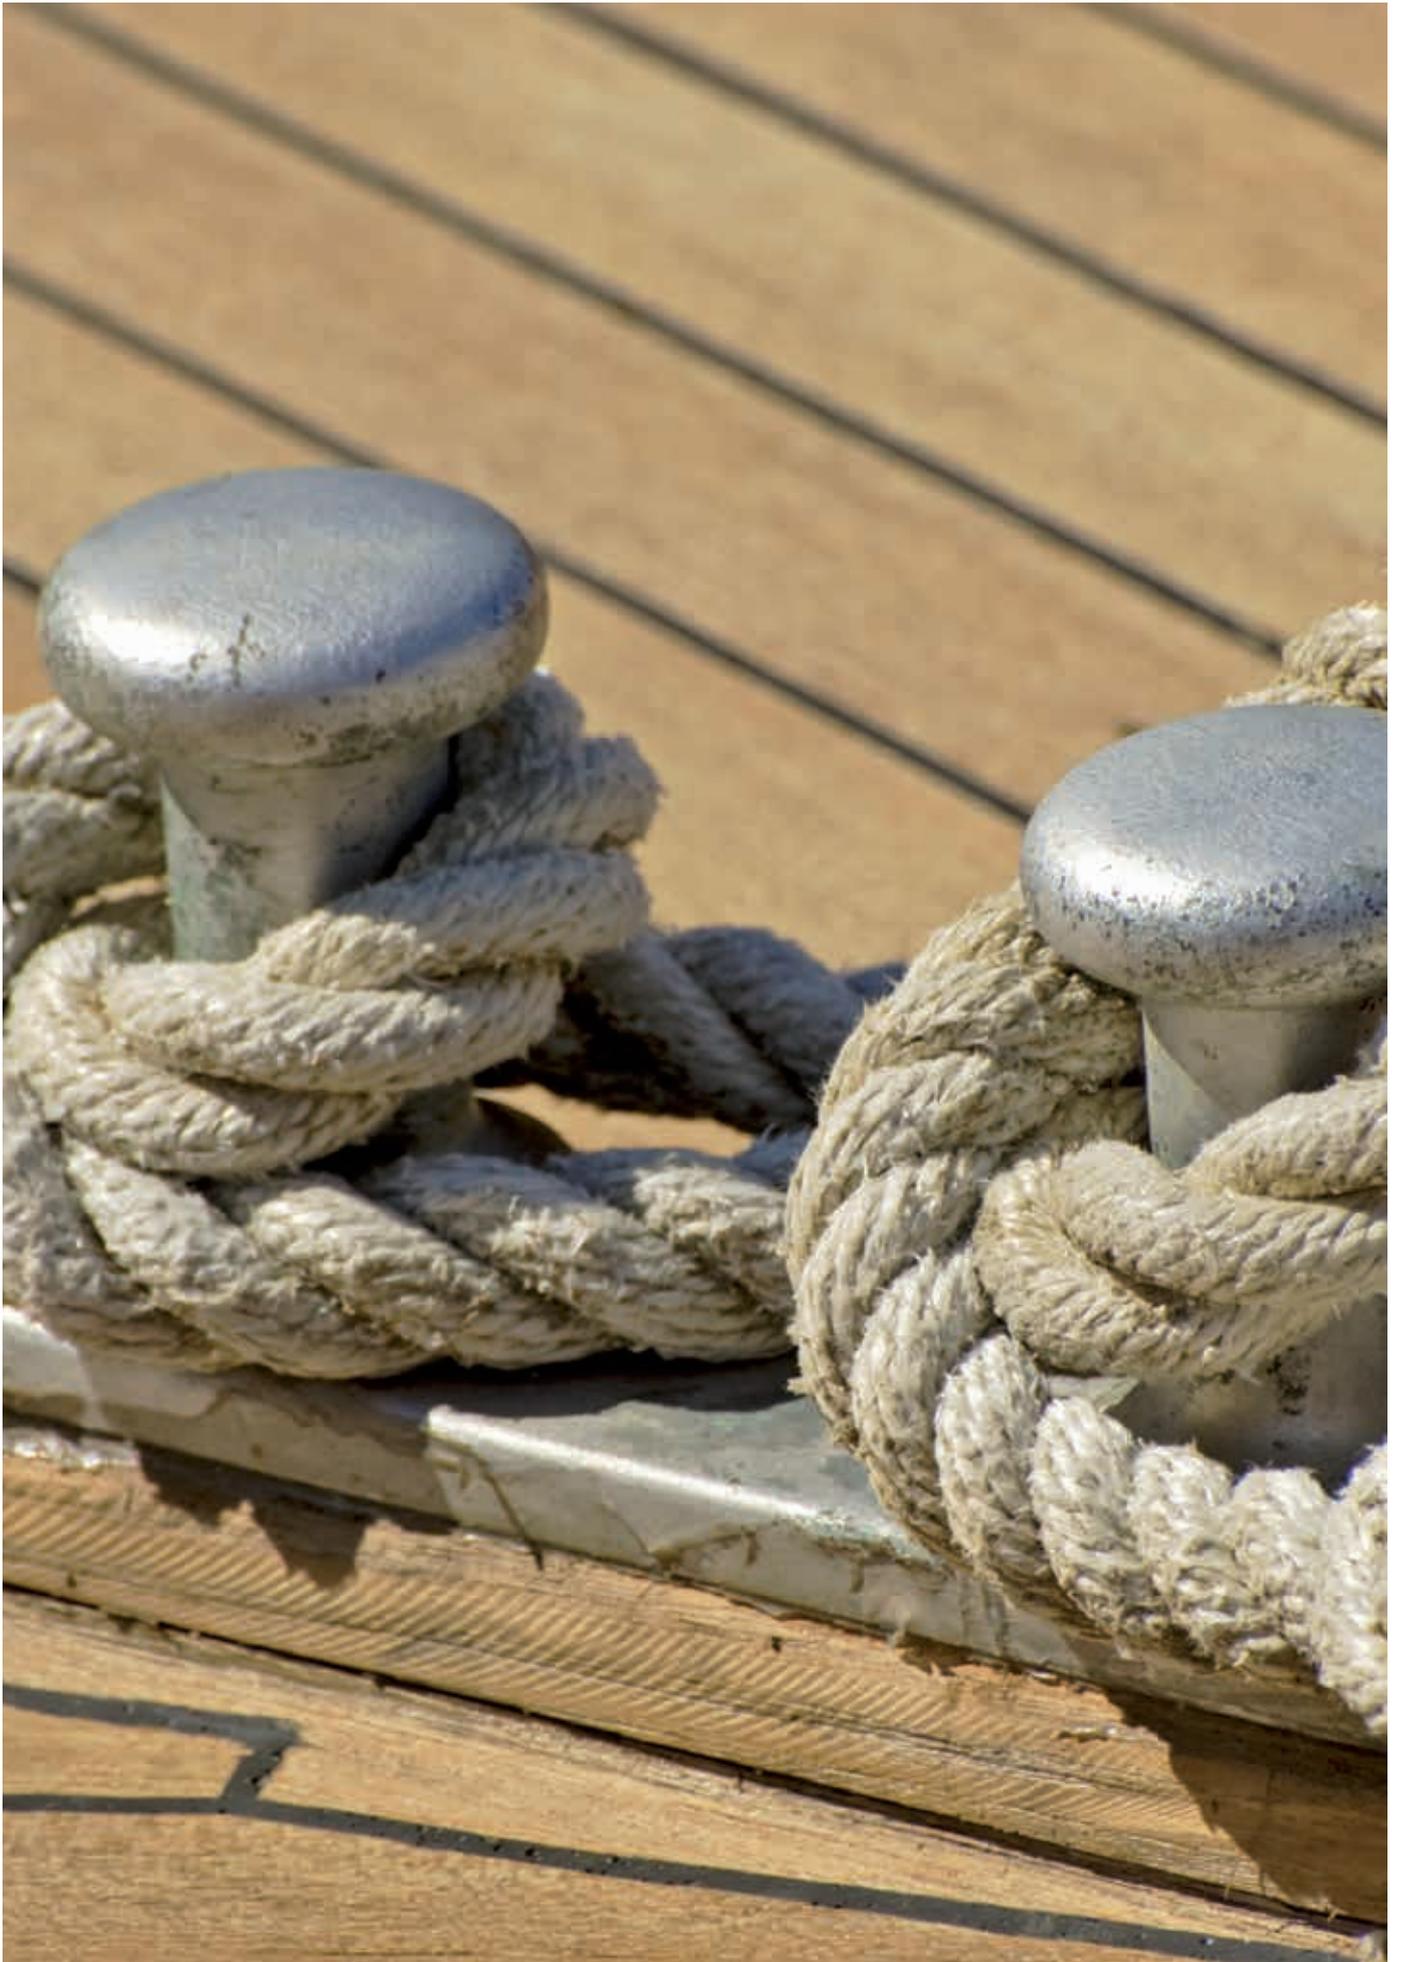

# Indel Webasto Marine – Installation examples



*Cruise 195 Inox*



*Drawer 65 Custom Panel*



*Cruise 85 Inox*



*Cruise 200 Inox*



*Wine Cellar Divino 23*



*Cruise 36 Inox painted*



*Clear Ice Maker & Drawer 65 Inox*



*Wine Cellar Divino 23*



*Cruise 49 Elegance with shiny stainless steel door front*



*Drawer 49 Inox*



*Cruise 130 Drink Inox*



*Cruise 130 Drink & Cruise 90 Freezer Inox side-by-side*



*Drawer 160 Inox painted*



*Cruise 90 Freezer Inox*



*Cruise 130 Inox*



*Cruise 36 Inox*



*2 X Drawer 16 Silver*



*Built-In 135*



*Cruise 49 Inox*



## **Indel Webasto Marine – Present all over the world!**

Indel Webasto Marine is the successful Joint Venture of Italian based IndelB and Germany based Webasto. These two companies join forces to bring high quality solutions enhancing comfort in galley equipment for marine applications and to provide excellent customer service in all key boating areas. Our global dealer support network ensures local expertise for all our customers. For more information, please visit our website [www.indelwebastomarine.com](http://www.indelwebastomarine.com).



Indel Webasto Marine S.R.L.  
I-47863 Novafeltria (RN) Italy  
Telephone: + 39 0541 848030  
Email: [info@indelwebastomarine.com](mailto:info@indelwebastomarine.com)

[www.indelwebastomarine.com](http://www.indelwebastomarine.com)